


Dof #	Part Number Qt	y Description
	35385	
		Cylinder (Incl. 2,20,72,72A) (3-1/8" Bore)
	27652	Pin, Dowel
	30700	Yoke, Governor
	30699C	Rod Assy., Governor (Incl. 15A & 15B)
	650494	Screw, 6-40 x 5/16"
16	33454	Governor Lever Assy.
17	29916	Clamp, Governor lever
18	650548	Screw, 8-32 x 5/16"
20	35319	Seal, Oil
	35326	Baffle, Blower housing
	650561	Screw, 1/4-20 x 5/8"
	35441A	Crankshaft
	29826	Screw, 10-32 x 3/4"
	29918	Lockwasher, # 8 E.T.
	29216	Nut & Lockwasher, 10-32 "Keps"
	30322	Locknut, Hex "Keps", 8-32
	29642	Ring, Retaining
45	35373A	Rod Assy., Connecting (Incl. 49)
46	650908	Bolt, Connecting rod
	650882	Bolt, Connecting rod
	34034	Lifter, Valve
	35374	Dipper, Oil
	35375	Camshaft (MCR)
	33273A	Extension, Blower housing
	650128	Screw, 10-24 x 1/2"
	35262	* Gasket, Cylinder cover
	35376	Cover, Cylinder (Incl. 75, 80, 311 & 312)
	35377	Bushing, Crankshaft
	27642	Plug, Oil drain
75	35319	Seal, Oil
80	31845	Shaft, Mechanical governor
81	30590A	Washer, Flat
	35378	Gear Assy., Governor (Incl. 81)
	30588A	Spool, Governor
	29193	Ring, Retaining
	650833	Screw, 1/4-20 x 1-3/16"
	650832	Screw, 1/4-20 x 1-3/10"
		·
	32589	Key, Flywheel
	611090	Flywheel
	650880	Washer, Belleville
	650881	Nut, Hex (5/8-18) (Add-on alternator)
	35135	Lamination Assy., Solid State
101	610118	Cover, Spark plug (Use as required)
102	650872	Stud, Lamination mounting
103	650814	Screw, Torx T-15, 10-24 x 1"
119	34041A	* Gasket, Head
	34030A	Head, Cylinder
	27878A	Exhaust Valve (Std.) (Incl. 151)
	27880A	Exhaust Valve (1/32" OS) (Incl. 151)
	34035	Intake Valve (\$\footnote{\text{Std.}}\) (Incl. 151)
	34036	Intake Valve (1/32" OS) (Incl. 151)
	26073	Washer, Flat (Use as required)
	650570	Washer, Flat (Use as required)
	650691	Washer (Use as req., but not w/6021A screw)
	650690	Washer, Belleville
129	650727	Screw, 5/16-18 x 1-3/4" (Use as requi red)
130	650694A	Screw, 5/16-18 x 2" (Use as required)
		· · · · · · · · · · · · · · · · · · ·

	Part Number	Qty	Description
130A	6021A		Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse with
			650691 washer)
121 /	650713		Scrow 5/16 19 v 5/9" (Llco ac require d)
			Screw, 5/16-18 x 5/8" (Use as require d)
	792028		Screw, 5/16-18 x 7/8" (Use as require d)
	650802		Screw, 1/4-20 x 5/8" (Use as required)
	650737		Screw, 1/4-20 x 1/2" (Use as required)
	650738		Screw, 1/4-20 x 5/8" (Use as required)
	33636		Resistor Spark Plug (RJ17LM)
139	33369		Bracket, Governor gear
140	650836		Screw, 10-24 x 1/2"
149	27882		Cap, Upper valve spring
149A	35862		Seal Assy., Intake valve
150	27881		Spring, Valve
151	32581		Cap, Lower valve spring
	27896A		* Gasket, Breather cover
	28423		Body, Breather
	28424		Element, Breather
	28425		Cover, Valve spring
	35350		Tube, Breather
	650128		Screw, 10-24 x 1/2"
	650597		Screw, 10-24 x 5/8"
	29752		
	30593		Nut & Lockwasher, 1/4-28
			Clip, Primer line (Use as required)
	30088A		Screw, 1/4-28 x 1"
	33263		* Gasket, Carburetor
	34707		Pipe, Intake
	610973		Terminal Assy. (Use as required)
	650378		Screw, Torx T-30, 5/16-18 x 1-1/8 "
	27915A		* Gasket, Intake pipe
	33375D		Blower Housing (For electric starter)
	650788		Screw, 5/16-18 x 3/4" (Use as require d)
	29747B		Screw, 5/16-24 x 21/32"
	33272B		Cover, Cylinder head
275	33280A		Muffler
	35824		Muffler (Optional quiet muffler)
276	31588		Plate, Muffler locking
	650696		Screw, 5/16-18x2-3/4" (Used with 276A)
277	650729		Screw, 5/16-18 x 3-3/16"
281	33013		Cover, Starter bubble
	650760		Screw, 8-32 x 3/8"
	32125		Cup, Starter
	35194		Screen, Starter
	29752		Nut & Lockwasher, 1/4-28
	29774		Fuel Line (Braided 8-1/4")(21 cm)(As req.)
	30705		Fuel Line (Braided 16")(41 cm)(Use as req.)
	30962		Fuel Line (Braided 32")(81 cm)(Use as req.)
	26460		Clamp, Fuel line (Use as required)
	650665		Screw, 1/4-15 x 7/8"
	34156A		·
300	34130A		Fuel Tank (Incl. 292 & 301) NOTE: These tanks were
			builtwith different size fuel inlet openings. Tanks with the
			1-3/16" I.D. opening use fuel cap 34210. Tanks with the
			1-1/2" I.D. opening use fuel cap 35355.
301	410144B		Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
	33032		Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16"
331	-		I.D.)
			·· - ·,


Ref #	Part Number	Qty Description
301	34210	Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (1-3/16" I.D)
301	35355	Fuel Cap (Red plastic) (1-1/2" I.D.)
305	33893A	Tube, Oil fill
306	33590	"O" Ring
	34011A	Dipstick (Incl. 306)
	29443	Clip, Fuel line (Use as required)
	34246	Clip, Ground wire (Use as required)
	34154	Plate, Fuel tank mounting
	34155	Bracket, Fuel tank mounting
	650561	Screw, 1/4-20 x 5/8"
	34870	Decal, Instruction Can be used on HM80 with diecast starter.
	34346	Decal, Instruction
	34686	Decal, Name
	631021	Inlet Needle, Seat & Clip Assy.
	632351	Carburetor (Incl. 184) (Refer to Division 5, Section A, page
300	002301	188 for breakdown or Fiche18A-1, Grid F-5)
390	590479	Rewind Starter (Refer to Division 5, Section C, page 30 for breakdown or Fiche 18A-1, Grid G-5)
400	33279G	Gasket Set (Incl. items marked*)
	35570	Screen Seal (Can be used on HM80 with stamped steel
		recoil starter)
409	35569	Spacer (Can be used on HM80 with stamped steel recoil
		starter)
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
411	35568	Debris Screen (Can be used on HM80 with stamped steel recoil starter)
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
420	730225	SAE 30, 4-Cycle Engine Oil (Quart)
	730226	SAE 5W30, 4-Cycle Engine Oil (Quart)
	730572	Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter)
429	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077	Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609	Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610	Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078	A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079	D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611	Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

Ref # Part Number	Qty Description
433 590636	Alternator Shaft (Use with engines equipped with stamped
	steel starter)(Use as required) (Refer to Mechanics
	Handbook for installation instructions).

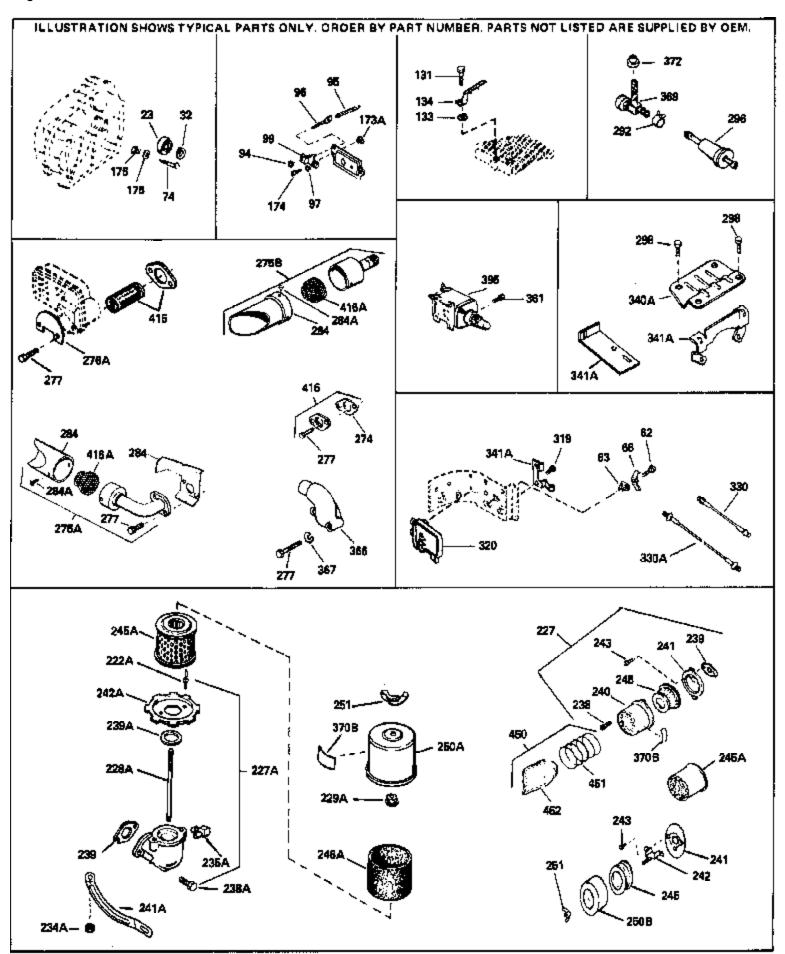

	Part Number	Qty	Description
	31855		Retainer, Bearing
	33450		Nut Lock, 10-32
	30886A		Spring, Extension
	30845A		Bolt, Governor spring adjusting
97			Lockwasher, Heavy split, #10 (Buy loc ally)
131	650802		Screw, 1/4-20 x 5/8" (Use as required)
131	650737		Screw, 1/4-20 x 1/2" (Use as required)
131	650738		Screw, 1/4-20 x 5/8" (Use as required)
133	650890		Washer, Lock, 5/16"
134	30747		Clip, Spark plug shorting
174	650128		Screw, 10-24 x 1/2"
	650597		Screw, 10-24 x 5/8"
	730127		Air Cleaner Ass'y. (Incl.238,239,240,241,243,245 & 370)
			(Use as required)
227	730164		Air Cleaner Ass'y. (Incl. 238, 239, 240, 241, 243 & 245) (Use
			as required)
228A	650824		Stud, 1/4-20 x 7.33 (Use as required)
228A	650851		Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru
			elbow)
239	27272A		* Gasket, Air cleaner
	27272A		* Gasket, Air cleaner
	33266		Bracket, Air cleaner
	33267		Bracket, Air cleaner
	28820		Screw, 10-32 x 1/2"
	34700		Element, Air cleaner
	33268		Element, Air cleaner
	33269A		·
			Cover, Air cleaner
	650513		Nut, Wing, 1/2-20
	35865		Gasket, Exhaust (Use as required)
	35824		Muffler (Optional quiet muffler)
2/5B	391026		Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler
			can be used on any model.)
	650696		Screw, 5/16-18x2-3/4" (Used with 276A)
277	650729		Screw, 5/16-18 x 3-3/16"
292	26460		Clamp, Fuel line (Use as required)
298	650665		Screw, 1/4-15 x 7/8"
370J	34870		Decal, Instruction Can be used on HM80 with diecast starter.
370B	34387		Decal, Instruction Can be used on HM80 with stamped steel
			recoil starter.
395	33329D		Starter Motor Kit (110-120 Volt) This 110-120 volt starter
			motor kit may have been added to this engine. It can be
			added only if cylinder hasdrilled and tapped starter mounting
			bosses and a ring gear flywheel. Refer to service number
			stamped on end cap of motor, or on decal for identification.
			Ref
			T C I
408	35570		Screen Seal (Can be used on HM80 with stamped steel
			recoil starter)
409	35569		Spacer (Can be used on HM80 with stamped steel recoil
			starter)
410	730573		Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
.10	· · ·		used on HM80 with stamped steel recoil starter)
			·
411	35568		Debris Screen (Can be used on HM80 with stamped steel
			recoil starter)

	Part Number	Qty Description
413	650907	Screw, $5/16-18 \times 1-5/8$ " (Can be used on HM80 with stamped steel recoil starter)
	730130 730572	Exh.Adapter Kit (Incl.274,277)(Use as req.) Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter)
429	650868	Screw, 8-18 \times 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077	Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609	Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610	Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078	A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079	D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611	Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636	Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

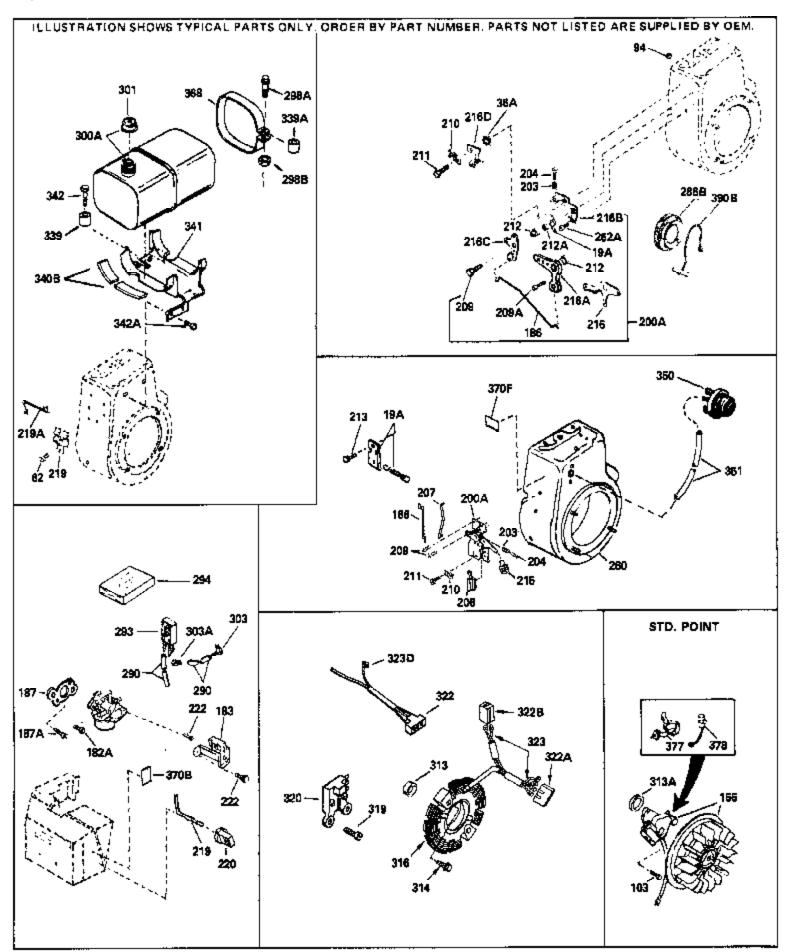

Ref #	Part Number	Qty	Description
	33450		Nut Lock, 10-32
103	650814		Screw, Torx T-15, 10-24 x 1"
206	610973		Terminal Assy. (Use as required)
207	33878		Link, Governor-to-throttle
260	33375D		Blower Housing (For electric starter)
275C	35824		Muffler (Optional quiet muffler)
	650696		Screw, 5/16-18x2-3/4" (Used with 276A)
	29774		Fuel Line (Braided 8-1/4")(21 cm)(As req.)
290	30705		Fuel Line (Braided 16")(41 cm)(Use as req.)
	30962		Fuel Line (Braided 32")(81 cm)(Use as req.)
	410144B		Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
301	33032		Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16"
			I.D.)
201	24240		
301	34210		Fuel Cap (Red Plastic) (Spurt Resistant, High Profile)
			(1-3/16" I.D)
301	35355		Fuel Cap (Red plastic) (1-1/2" I.D.)
339	35038		Spacer, Tank
341	34155		Bracket, Fuel tank mounting
342	650561		Screw, 1/4-20 x 5/8"
370J	34870		Decal, Instruction Can be used on HM80 with diecast starter.
370B	34387		Decal, Instruction Can be used on HM80 with stamped steel
			recoil starter.
<i>1</i> 08	35570		Screen Seal (Can be used on HM80 with stamped steel
400	33370		recoil starter)
			recoil starter)
409	35569		Spacer (Can be used on HM80 with stamped steel recoil
			starter)
410	730573		Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
710	700010		used on HM80 with stamped steel recoil starter)
			•
411	35568		Debris Screen (Can be used on HM80 with stamped steel
			recoil starter)
413	650907		Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with
	000001		stamped steel recoil starter)
405	700570		
425	730572		Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on
			HM80 with die cast starter)
429	650868		Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to
			Mechanics Handbook for installation instructions).
400	044077		,
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics
			Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast
			aluminum starter)(Use as required) (Refer to Mechanics
			Handbook for installation instructions)
404	500040		
431	590610		Centering tube (Use as required) (Refer to Mechanics
			Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to
			Mechanics Handbook for installation instructions).
400	611070		•
432	611079		D.C. Charging Connector (Use as required) (Refer to
			Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast
			aluminum starter)(Use as required) (Refer to Mechanics
			Handbook for installation instructions).

Ref # Part I	Number Qty	Description
433 5906	36	Alternator Shaft (Use with engines equipped with stamped
		steel starter)(Use as required) (Refer to Mechanics
		Handbook for installation instructions).