

Ref #	Part Number Qt	y Description
1	34348B	Cylinder (Incl.2,20,72,72A) (3-1/8" B ore)
	27652	Pin, Dowel
	650820	Screw, 1/4-20 x 1/2"
	30968	Nipple, Pipe
	30969	Cap, Oil drain
	30700	Yoke, Governor
	650494	Screw, 6-40 x 5/16"
	30699C	Rod Assy., Governor (Incl. 15A & 15B)
	33454	Governor Lever Assy.
	29916	Clamp, Governor lever
	650548	Screw, 8-32 x 5/16"
	34663	Spring, Speed control
	32630	Seal, Oil
25	35256A	Baffle, Blower housing
26	650561	Screw, 1/4-20 x 5/8"
30	35198	Crankshaft (Incl. 108 & 109)
35	29826	Screw, 10-32 x 3/4"
	29918	Lockwasher, #8 E.T.
	30322	Locknut, Hex "Keps", 8-32
	29216	Nut & Lockwasher, 10-32 "Keps"
	29642	Ring, Retaining
	34552	Piston, Pin & Ring Set (Std.) (3-1/8")
	34553	Piston, Pin & Ring Set (0.010" OS)
	34554	Piston, Pin & Ring Set (.000" OS)
	34329A	Piston & Pin Ass'y.(Std)(Incl.43)(3-1 /8")
	34330A	Piston & Pin Ass'y. (.010" OS)(Incl. 43)
	34331A	Piston & Pin Ass'y. (.020" OS)(Incl. 43)
	34332	Ring Set (Std.) (3-1/8" Bore)
	34333	Ring Set (.010" OS)
	34334	Ring Set (.020" OS)
	27888	Ring, Piston pin retaining
	32591C	Rod Assy., Connecting (Incl. 49)
	650662C	Bolt, Connecting rod (2 pieces)
	34034	Lifter, Valve
	34242	Dipper, Oil
50	34143	Camshaft (MCR)
60	33273A	Extension, Blower housing
61	34126	Bracket, Grommet mounting
62	650760	Screw, 8-32 x 3/8"
63	28545	Grommet, Plastic
65	650128	Screw, 10-24 x 1/2"
	35262	* Gasket, Cylinder cover
	33367B	Cylinder Cover (Incl. 71, 75, 80, 311 & 312)
	33368	Bushing, Crankshaft
	27642	Plug, Oil drain
	31950	Seal, Oil
	31845	Shaft, Mechanical governor
	30590A	Washer, Flat
	30591	Gear Assy., Governor (Incl. 81)
		· · · · · · · · · · · · · · · · · · ·
	30588A	Spool, Governor
	29193	Ring, Retaining
	650833	Screw, 1/4-20 x 1-3/16"
	650832	Screw, 1/4-20 x 1-11/16"
	32589	Key, Flywheel
	611093	Flywheel (3 amp, w/ring gear)
	650815	Washer, Belleville
	8116	Nut, Hex (1/2-20)
100	35135	Lamination Assy., Solid State

101 102 103 108 109 110 119 120 125 125 126 126 127A 127A 127A 127A 127 128 129 130	610118 650872 650814 29783 33245 35253 34041A 34030A 27878A 27880A 34035 34036 26073 650570 650691 650690 650727 650694A 6021A	Qty	Cover, Spark plug (Use as required) Stud, Lamination mounting Screw, Torx T-15, 10-24 x 1" Pin, Crankshaft gear Gear, Crankshaft Ground Wire * Gasket, Head Head, Cylinder Exhaust Valve (Std.) (Incl. 151) Exhaust Valve (1/32" OS) (Incl. 151) Intake Valve (Std.) (Incl. 151) Intake Valve (1/32" OS) (Incl. 151) Washer, Flat (Use as required) Washer, Flat (Use as required) Washer, Belleville Screw, 5/16-18 x 1-3/4" (Use as required) Screw, 5/16-18 x 2" (Use as required, but do notuse with 650691 washer)
131A 131 131 135 139 140 149 149A 150 151 169 170 171 172 173 174 174 178 179B 182 184 185 203 204 206 223 224 260 261 265 275C 275	27881 32581 27896A 28423 28424 28425 35350 650128 650597 29752 30593 30088A 33263 33877 31342 650549 610973 650378 27915A 35447A 650788 29747B 33272B		Screw, 5/16-18 x 5/8" (Use as require d) Screw, 5/16-18 x 7/8" (Use as require d) Screw, 1/4-20 x 5/8" (Use as required) Screw, 1/4-20 x 1/2" (Use as required) Screw, 1/4-20 x 5/8" (Use as required) Screw, 1/4-20 x 5/8" (Use as required) Resistor Spark Plug (RJ17LM) Bracket, Governor gear Screw, 10-24 x 1/2" Cap, Upper valve spring Seal Assy., Intake valve Spring, Valve Cap, Lower valve spring * Gasket, Breather cover Body, Breather Element, Breather Cover, Valve spring Tube, Breather Screw, 10-24 x 1/2" Screw, 10-24 x 5/8" Nut & Lockwasher, 1/4-28 Clip, Primer line (Use as required) Screw, 1/4-28 x 1" * Gasket, Carburetor Pipe, Intake Spring, Compression Screw, 5-40 x 7/16" Terminal Assy. (Use as required) Screw, Torx T-30, 5/16-18 x 1-1/8 " * Gasket, Intake pipe Blower Housing (For electric starter) Screw, 5/16-18 x 3/4" (Use as require d) Muffler Plate, Muffler locking


Dof #	Port Number	Ohi	Deparintion
	Part Number 650696	Qıy	Description Screw, 5/16-18x2-3/4" (Used with 276A)
			· · · · · · · · · · · · · · · · · · ·
	32125		Cup, Starter
	35194		Screen, Starter
	29752		Nut & Lockwasher, 1/4-28
290	29774		Fuel Line (Braided 8-1/4")(21 cm)(As req.)
290	30705		Fuel Line (Braided 16")(41 cm)(Use as req.)
290	30962		Fuel Line (Braided 32")(81 cm)(Use as req.)
292	26460		Clamp, Fuel line (Use as required)
	650665		Screw, 1/4-15 x 7/8"
	34156A		Fuel Tank (Incl. 292 & 301) NOTE: These tanks were
000	0.1100.1		builtwith different size fuel inlet openings. Tanks with the
			1-3/16" I.D. opening use fuel cap 34210. Tanks with the
			1-1/2" I.D. opening use fuel cap 35355.
301	410144B		Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
	33032		Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16"
001	00002		I.D.)
301	34210		Fuel Cap (Red Plastic) (Spurt Resistant, High Profile)
			(1-3/16" I.D)
204	25255		Fire Con (Pad plactic) (4.4/0 LD)
	35355		Fuel Cap (Red plastic) (1-1/2" I.D.)
	33893A		Tube, Oil fill
	33590		"O" Ring
310	34011A		Dipstick (Incl. 306)
324	33177		Terminal
325	29443		Clip, Fuel line (Use as required)
325	34246		Clip, Ground wire (Use as required)
	35593		Ignition Key
	610973		Terminal Assy.
	35305		Wire, Ground
	650765		
			Screw, 10-32 x 1/2"
	35057A		Cover, Carburetor
	28942		Screw, 10-32 x 3/8"
	34154		Plate, Fuel tank mounting
	34155		Bracket, Fuel tank mounting
	650561		Screw, 1/4-20 x 5/8"
355	590574		Handle, Mitten grip
356	650168		Washer, Flat
359	34141		Guard, Starter
360	32576		Seal, Snow guard
	33377		Bracket, Carburetor cover mounting
	650767		Screw, 8-32 x 27/64"
	34414		Decal, Warning
	34416		Decal, Instruction
	34870		Decal, Instruction Can be used on HM80 with diecast starter.
	34417		·
			Decal, Primer
	34686		Decal, Name
	35077		Decal, Instruction
	631021		Inlet Needle, Seat & Clip Assy.
380	632334A		Carburetor (Incl. 184) (Refer to Division 5, Section A, page
			188 for breakdown or Fiche18A-1, Grid F-5)
200	E00E72		Powing Storter (Pofer to Division E. Costian C. name 20 for
390	590573		Rewind Starter (Refer to Division 5, Section C, page 30 for
			breakdown or Fiche 18A-1, Grid G-5)
400	33279G		Gasket Set (Incl. items marked*)
	35570		Screen Seal (Can be used on HM80 with stamped steel
-1 00	300.0		recoil starter)
			recoil starter)

	Part Number		escription
409	35569		pacer (Can be used on HM80 with stamped steel recoil earter)
410	730573		ebris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be sed on HM80 with stamped steel recoil starter)
411	35568		ebris Screen (Can be used on HM80 with stamped steel coil starter)
413	650907		crew, 5/16-18 x 1-5/8" (Can be used on HM80 with amped steel recoil starter)
421	730225 730226 730572	S <i>A</i> Sta	AE 30, 4-Cycle Engine Oil (Quart) AE 5W30, 4-Cycle Engine Oil (Quart) arter Muff Kit (Incl. 370J, 426 & 427) (Can be used on W80 with die cast starter)
429	650868		crew, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to echanics Handbook for installation instructions).
430	611077		ternator, Add on (Use as required) (Refer to Mechanics andbook for installation instructions).
431	590609	alu	entering tube (Use with engines equipped with die cast uminum starter)(Use as required) (Refer to Mechanics andbook for installation instructions)
431	590610		entering tube (Use as required) (Refer to Mechanics andbook for installation instructions).
432	611078		C. Lighting Connector (Use as required) (Refer to echanics Handbook for installation instructions).
432	611079		C. Charging Connector (Use as required) (Refer to echanics Handbook for installation instructions).
433	590611	alu	ternator Shaft (4.00") (Use with engines equipped with cast uminum starter)(Use as required) (Refer to Mechanics andbook for installation instructions).
433	590636	ste	ternator Shaft (Use with engines equipped with stamped eel starter)(Use as required) (Refer to Mechanics andbook for installation instructions).



Ref #	Part Number Qty	Description
	650760	Screw, 8-32 x 3/8"
	28545	Grommet, Plastic
	31855	Retainer, Bearing
97		Lockwasher, Heavy split, #10 (Buy loc ally)
	650802	Screw, 1/4-20 x 5/8" (Use as required)
	650737	Screw, 1/4-20 x 1/2" (Use as required)
	650738	Screw, 1/4-20 x 5/8" (Use as required)
	650128	Screw, 10-24 x 1/2"
	650597	Screw, 10-24 x 5/8"
	730127	Air Cleaner Ass'y. (Incl.238,239,240,241,243,245 & 370)
221	730127	(Use as required)
		(Ose as required)
227	730164	Air Cleaner Ass'y. (Incl. 238, 239, 240, 241, 243 & 245) (Use
		as required)
2284	650824	Stud, 1/4-20 x 7.33 (Use as required)
	650851	Stud, 1/4-20 x 7.33 (Use as required) (Used with drilled thru
220A	030031	
		elbow)
245A	34700	Element, Air cleaner
274	35865	Gasket, Exhaust (Use as required)
275B	391026	Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler
		can be used on any model.)
2750	35824	Muffler (Optional quiet muffler)
		Muffler (Optional quiet muffler)
	651002	Screw, 5/16-18 x 4-3/16"
	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
	26460	Clamp, Fuel line (Use as required)
	650665	Screw, 1/4-15 x 7/8"
	35305	Wire, Ground
	35857	Valve, Fuel shut-off
3/0B	34387	Decal, Instruction Can be used on HM80 with stamped steel
		recoil starter.
370J	34870	Decal, Instruction Can be used on HM80 with diecast starter.
	33329D	Starter Motor Kit (110-120 Volt) This 110-120 volt starter
		motor kit may have been added to this engine. It can be
		added only if cylinder hasdrilled and tapped starter mounting
		bosses and a ring gear flywheel. Refer to service number
		stamped on end cap of motor, or on decal for identification.
		Ref
400	05570	
408	35570	Screen Seal (Can be used on HM80 with stamped steel
		recoil starter)
409	35569	Spacer (Can be used on HM80 with stamped steel recoil
		starter)
440	700570	,
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
		used on HM80 with stamped steel recoil starter)
411	35568	Debris Screen (Can be used on HM80 with stamped steel
	-	recoil starter)
440	050007	•
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with
		stamped steel recoil starter)
415	730130	Exh.Adapter Kit (Incl.274,277)(Use as req.)
	730572	Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on
120	. 5551.	HM80 with die cast starter)
		,
429	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to
		Mechanics Handbook for installation instructions).

Ref #	Part Number	Qty	Description
430	611077	•	Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

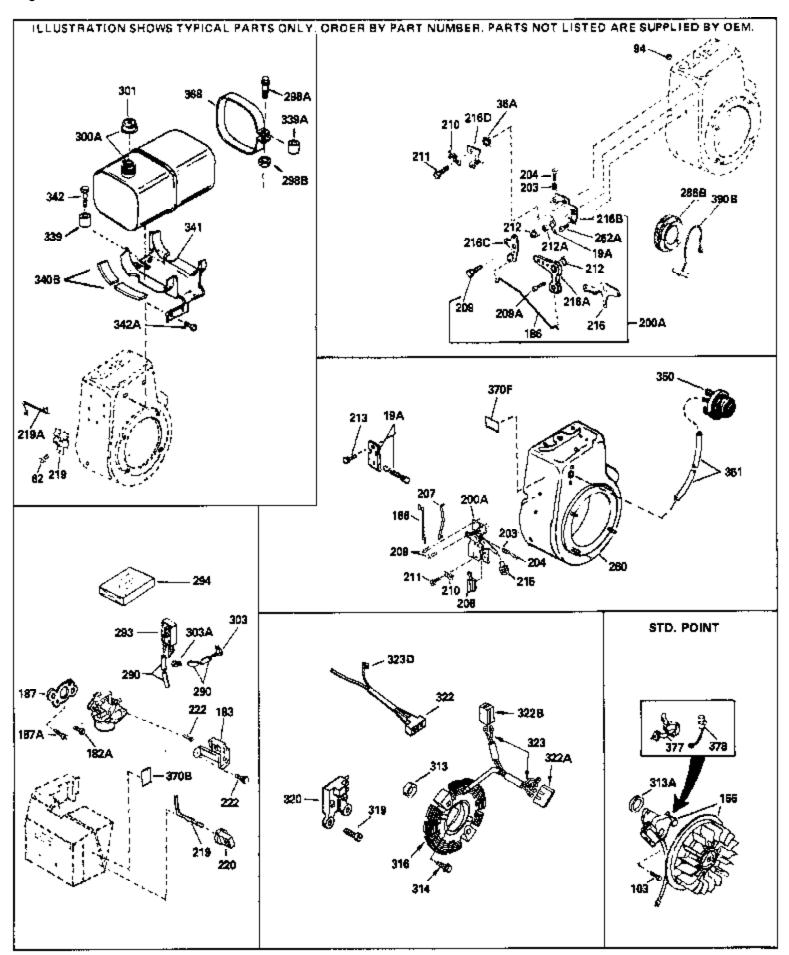

	Part Number	Qty	Description
	650760		Screw, 8-32 x 3/8"
	650814		Screw, Torx T-15, 10-24 x 1"
	34587		Bracket, Choke
	34667		Link, Governor
200A	34677		Control Bracket (Incl.19,19A,203,204, 206,209)
203	31342		Spring, Compression
204	650549		Screw, 5-40 x 7/16"
206	610973		Terminal Assy. (Use as required)
	33878		Link, Governor-to-throttle
	650821		Screw, 10-32 x 1/2"
	32410		Knob, Control
	34586		Rod, Choke
	35438		
			Knob, Control
	28820		Screw, 10-32 x 1/2"
	35447A		Blower Housing (For electric starter)
	35824		Muffler (Optional quiet muffler)
	650696		Screw, 5/16-18x2-3/4" (Used with 276A)
290	29774		Fuel Line (Braided 8-1/4")(21 cm)(As req.)
290	30705		Fuel Line (Braided 16")(41 cm)(Use as req.)
290	30962		Fuel Line (Braided 32")(81 cm)(Use as req.)
301	410144B		Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
	33032		Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16"
• • • • • • • • • • • • • • • • • • • •			I.D.)
			,
301	34210		Fuel Cap (Red Plastic) (Spurt Resistant, High Profile)
			(1-3/16" I.D)
204	SESE		Fuel Cap (Pad plants) (4.1/0" LD)
	35355		Fuel Cap (Red plastic) (1-1/2" I.D.)
	35189		Spacer, Coil
	650873		Screw, 1/4-20 x 3/4"
	611095		Alt.Coil (Incl.322E & 322D) (3 amp, A .C.)
322	610823		Connector
323D	610822		Terminal, Male
339	35038		Spacer, Tank
341	34155		Bracket, Fuel tank mounting
342	650561		Screw, 1/4-20 x 5/8"
	570682		Primer Assy.
	32180C		Primer Line
	34387		Decal, Instruction Can be used on HM80 with stamped steel
3700	0-1007		recoil starter.
	34870		Decal, Instruction Can be used on HM80 with diecast starter.
408	35570		Screen Seal (Can be used on HM80 with stamped steel
			recoil starter)
400	05500		Conseq (Constructed and LIMO) with attenues of standard respil
409	35569		Spacer (Can be used on HM80 with stamped steel recoil
			starter)
410	730573		Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
410	100010		used on HM80 with stamped steel recoil starter)
			used of thinloo with starriped steel recoil starter)
411	35568		Debris Screen (Can be used on HM80 with stamped steel
			recoil starter)
440	050007		,
413	650907		Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with
			stamped steel recoil starter)
425	730572		Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on
720	100012		HM80 with die cast starter)
			I IIVIOO WILLI GIG CASL SLAILGI)
429	650868		Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to
			Mechanics Handbook for installation instructions).
			,

Ref #	Part Number	Qty	
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).