

| Dof # | Part Number Qty | Description                                    |
|-------|-----------------|--|
|       | 35385           | Cylinder (Incl. 2,20,72,72A) (3-1/8" Bore)     |
|       |                 |  |
|       | 27652           | Pin, Dowel                                     |
|       | 650494          | Screw, 6-40 x 5/16"                            |
|       | 30699C          | Rod Assy., Governor (Incl. 15A & 15B)          |
|       | 30700           | Yoke, Governor                                 |
|       | 33454           | Governor Lever Assy.                           |
| 17    | 29916           | Clamp, Governor lever                          |
| 18    | 650548          | Screw, 8-32 x 5/16"                            |
| 19    | 34663           | Spring, Speed control                          |
| 20    | 35319           | Seal, Oil                                      |
| 25    | 35326           | Baffle, Blower housing                         |
|       | 650561          | Screw, 1/4-20 x 5/8"                           |
|       | 35420A          | Crankshaft                                     |
|       | 33628           | Washer, Thrust                                 |
|       | 29826           | Screw, 10-32 x 3/4"                            |
|       | 29918           | Lockwasher, #8 E.T.                            |
|       | 29216           | Nut & Lockwasher, 10-32 "Keps"                 |
|       | 30322           | ·  |
|       |                 | Locknut, Hex "Keps", 8-32                      |
|       | 29642           | Ring, Retaining                                |
|       | 35373A          | Rod Assy., Connecting (Incl. 49)               |
|       | 650908          | Bolt, Connecting rod                           |
|       | 650882          | Bolt, Connecting rod                           |
|       | 34034           | Lifter, Valve                                  |
|       | 35374           | Dipper, Oil                                    |
|       | 35375           | Camshaft (MCR)                                 |
| 60    | 33273A          | Extension, Blower housing                      |
| 65    | 650128          | Screw, 10-24 x 1/2"                            |
| 69    | 35262           | * Gasket, Cylinder cover                       |
| 70    | 33626B          | Cyl. Cover (Incl.71,74,75,80,175,176, 311,312) |
| 72    | 27642           | Plug, Oil drain                                |
| 75    | 33625           | Seal, Oil                                      |
|       | 31845           | Shaft, Mechanical governor                     |
|       | 30590A          | Washer, Flat                                   |
|       | 35378           | Gear Assy., Governor (Incl. 81)                |
|       | 30588A          | Spool, Governor                                |
|       | 29193           | Ring, Retaining                                |
|       | 650833          | Screw, 1/4-20 x 1-3/16"                        |
|       | 650832          | Screw, 1/4-20 x 1-11/16"                       |
|       | 32589           | Key, Flywheel                                  |
|       | 611090          | Flywheel                                       |
|       | 650880          | Washer, Belleville                             |
|       | 650881          |  |
|       |                 | Nut, Hex (5/8-18) (Add-on alternator)          |
|       | 35135<br>37376  | Lamination Assy., Solid State                  |
|       | 27276           | Cover, Spark plug                              |
|       | 610118          | Cover, Spark plug (Use as required)            |
|       | 650872          | Stud, Lamination mounting                      |
|       | 650814          | Screw, Torx T-15, 10-24 x 1"                   |
|       | 34041A          | * Gasket, Head                                 |
|       | 34030A          | Head, Cylinder                                 |
|       | 27878A          | Exhaust Valve (Std.) (Incl. 151)               |
|       | 27880A          | Exhaust Valve (1/32" OS) (Incl. 151)           |
| 126   | 34035           | Intake Valve (Std.) (Incl. 151)                |
|       | 34036           | Intake Valve (1/32" OS) (Incl. 151)            |
|       | 26073           | Washer, Flat (Use as required)                 |
|       | 650570          | Washer, Flat (Use as required)                 |
|       | 650691          | Washer (Use as req., but not w/6021A screw)    |
|       | 650690          | Washer, Belleville                             |
|       | 650727          | Screw, 5/16-18 x 1-3/4" (Use as requi red)     |
| 123   | 555. <u>E</u> 1 | 23.3, 0/10/10/X/10/1/ (000 do 10401/10d)       |

| Ref # | Part Number Qty  | Description  |
|-------|------------------|--|
| 130A  | 6021A            | Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse with |
|       |                  | 650691 washer)   |
| 130   | 650694A          | Screw, 5/16-18 x 2" (Use as required)                        |
|       | 650713           | Screw, 5/16-18 x 5/8" (Use as require d)                     |
|       | 792028           | Screw, 5/16-18 x 7/8" (Use as require d)                     |
|       | 650802           | Screw, 1/4-20 x 5/8" (Use as required )                      |
|       | 650737           | Screw, 1/4-20 x 1/2" (Use as required )                      |
|       | 650738           | Screw, 1/4-20 x 5/8" (Use as required )                      |
|       | 33636            | Resistor Spark Plug (RJ17LM)                                 |
|       | 33369            | Bracket, Governor gear                                       |
| 140   | 650836           | Screw, 10-24 x 1/2"  |
| 149   | 27882            | Cap, Upper valve spring                                      |
| 149A  | 35862            | Seal Assy., Intake valve                                     |
| 150   | 27881            | Spring, Valve  |
| 151   | 32581            | Cap, Lower valve spring                                      |
| 169   | 27896A           | * Gasket, Breather cover                                     |
| 170   | 28423            | Body, Breather   |
| 171   | 28424            | Element, Breather  |
| 172   | 28425            | Cover, Valve spring  |
| 173   | 34696            | Tube, Breather   |
| 173A  | 32446            | Grommet, Breather tube                                       |
|       | 650128           | Screw, 10-24 x 1/2"  |
|       | 650597           | Screw, 10-24 x 5/8"  |
|       | 29752            | Nut & Lockwasher, 1/4-28                                     |
|       | 30593            | Clip, Primer line (Use as required)                          |
|       | 30088A           | Screw, 1/4-28 x 1"   |
|       | 33263            | * Gasket, Carburetor   |
|       | 34707            | Pipe, Intake   |
|       | 31342            | Spring, Compression  |
|       | 650549           | Screw, 5-40 x 7/16"  |
|       | 610973           | Terminal Assy. (Use as required)                             |
|       | 650378           | Screw, Torx T-30, 5/16-18 x 1-1/8 "                          |
|       | 27915A           | * Gasket, Intake pipe  |
|       | 35043            | Tube, Carburetor   |
|       | 34833B           | Blower Housing (For electric starter)                        |
|       | 650788<br>20747B | Screw, 5/16-18 x 3/4" (Use as require d)                     |
|       | 29747B           | Screw, 5/16-24 x 21/32"                                      |
|       | 33272B           | Cover, Cylinder head   |
|       | 35824<br>34779A  | Muffler (Optional quiet muffler) Muffler                     |
|       | 31588            | Plate, Muffler locking                                       |
|       | 650729           | Screw, 5/16-18 x 3-3/16"                                     |
|       | 650696           | Screw, 5/16-18x2-3/4" (Used with 276A)                       |
|       | 33013            | Cover, Starter bubble  |
|       | 650760           | Screw, 8-32 x 3/8"   |
|       | 32125            | Cup, Starter   |
|       | 35194            | Screen, Starter  |
|       | 29752            | Nut & Lockwasher, 1/4-28                                     |
|       | 29774            | Fuel Line (Braided 8-1/4")(21 cm)(As req.)                   |
|       | 30705            | Fuel Line (Braided 16")(41 cm)(Use as req.)                  |
|       | 30962            | Fuel Line (Braided 32")(81 cm)(Use as req.)                  |
|       | 26460            | Clamp, Fuel line (Use as required)                           |
|       | 650665           | Screw, 1/4-15 x 7/8"   |
|       | 34156A           | Fuel Tank (Incl. 292 & 301) NOTE: These tanks were           |
| 322   |                  | builtwith different size fuel inlet openings. Tanks with the |
|       |                  | 1-3/16" I.D. opening use fuel cap 34210. Tanks with the      |
|       |                  | 1-1/2" I.D. opening use fuel cap 35355.                      |
|       |                  | -  |


| 301   | Part Number<br>410144B<br>33032   | Qty | Description Fuel Cap (White Plastic)(Std)(1-1/2" I.D.) Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16" I.D.)   |
|---|---|-----|---|
| 301   | 34210   |     | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (1-3/16" I.D)  |
| 306<br>310<br>325<br>325<br>336<br>338<br>340<br>341<br>342<br>370<br>370J<br>370A<br>379 | 35355<br>29673<br>31297<br>29443<br>34246<br>650765<br>28942<br>34154<br>34155<br>650561<br>34346<br>34870<br>34686<br>631021<br>632325 |     | Fuel Cap (Red plastic) (1-1/2" I.D.)  * Gasket, Oil fill  Dipstick (Incl. 306)  Clip, Fuel line (Use as required)  Clip, Ground wire (Use as required)  Screw, 10-32 x 1/2"  Screw, 10-32 x 3/8"  Plate, Fuel tank mounting  Bracket, Fuel tank mounting  Screw, 1/4-20 x 5/8"  Decal, Instruction  Decal, Instruction Can be used on HM80 with diecast starter.  Decal, Name  Inlet Needle, Seat & Clip Assy.  Carburetor (Incl. 184) (Refer to Division 5, Section A, page 188 for breakdown or Fiche18A-1, Grid F-5) |
| 390   | 590479  |     | Rewind Starter (Refer to Division 5, Section C, page 30 for breakdown or Fiche 18A-1, Grid G-5)   |
|   | 33279G<br>35570   |     | Gasket Set (Incl. items marked*) Screen Seal (Can be used on HM80 with stamped steel recoil starter)  |
| 409   | 35569   |     | Spacer (Can be used on HM80 with stamped steel recoil starter)  |
| 410   | 730573  |     | Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)  |
| 411   | 35568   |     | Debris Screen (Can be used on HM80 with stamped steel recoil starter)   |
| 413   | 650907  |     | Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)   |
| 421   | 730225<br>730226<br>730572  |     | SAE 30, 4-Cycle Engine Oil (Quart) SAE 5W30, 4-Cycle Engine Oil (Quart) Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter)  |
| 429   | 650868  |     | Screw, 8-18 $\times$ 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).   |
| 430   | 611077  |     | Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).   |
| 431   | 590609  |     | Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)  |
| 431   | 590610  |     | Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).   |
| 432   | 611078  |     | A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).  |

| Ref # Part Number<br>432 611079 | Qty Description  D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).                                       |
|---------------------------------|---|
| 433 590611                      | Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 433 590636                      | Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).         |



| Dof # | Dort Number | Description  |
|-------|-------------|--|
|       |             | Description  Rescription                                       |
|       | 33627       | Bearing, Ball  |
|       | 33628       | Washer, Thrust   |
|       | 31855       | Retainer, Bearing  |
| 97    |             | Lockwasher, Heavy split, #10 (Buy loc ally)                    |
| 131   | 650802      | Screw, 1/4-20 x 5/8" (Use as required )                        |
| 131   | 650737      | Screw, 1/4-20 x 1/2" (Use as required )                        |
| 131   | 650738      | Screw, 1/4-20 x 5/8" (Use as required )                        |
| 133   | 650890      | Washer, Lock, 5/16"  |
|       | 30747       | Clip, Spark plug shorting                                      |
|       | 32446       | Grommet, Breather tube   |
|       | 650128      | Screw, 10-24 x 1/2"  |
|       | 650597      | Screw, 10-24 x 5/8"  |
|       | 650778      | Lockwasher   |
|       |             |  |
|       | 650580      | Nut, Lock, 10-24   |
| 222A  |             | Pop Rivet (1/8" dia.) (Can be bought locally)                  |
| 227   | 730127      | Air Cleaner Ass'y. (Incl.238,239,240,241,243,245 & 370)        |
|       |             | (Use as required)  |
| 227   | 730164      | Air Cleaner Ass'y. (Incl. 238, 239, 240, 241, 243 & 245) (Use  |
| 221   | 730104      |  |
|       |             | as required)   |
| 227A  | 35044       | Air Cl.Elbow (Incl.222A,228A,235A,239 A,242A)                  |
|       | 650824      | Stud, 1/4-20 x 7.33 (Use as required)                          |
|       | 650851      | Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru   |
|       |             | elbow)   |
|       |             | CIDOWY   |
| 229A  | 650825      | Nut & Lockwasher, 1/4-20                                       |
| 234A  | 650852      | Hex Nut, 1/4-20 (Used w/drilled thru elbow)                    |
| 235A  | 30675       | Fitting, Breather  |
|       | 650163      | Screw, 10-32 x 7/8"  |
|       | 34698A      | * Gasket, Air cleaner bracket                                  |
|       | 35045       | Air Cl.Bracket (Used w/drilled thru e lbow)                    |
|       | 34699       | Bracket, Air cleaner   |
|       | 34700       | Element, Air cleaner   |
|       |             | ·  |
|       | 34703       | Filter, Pre-air  |
|       | 34702       | Cover, Air cleaner   |
|       | 650513      | Nut, Wing, 1/2-20  |
|       | 35865       | Gasket, Exhaust (Use as required)                              |
| 275B  | 391026      | Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler |
|       |             | can be used on any model.)                                     |
| 2750  | 35824       | Mufflor (Optional quiet mufflor)                               |
|       |             | Muffler (Optional quiet muffler)                               |
|       | 650696      | Screw, 5/16-18x2-3/4" (Used with 276A)                         |
|       | 650729      | Screw, 5/16-18 x 3-3/16"                                       |
|       | 26460       | Clamp, Fuel line (Use as required)                             |
|       | 650665      | Screw, 1/4-15 x 7/8"   |
|       | 35857       | Valve, Fuel shut-off   |
| 370J  | 34870       | Decal, Instruction Can be used on HM80 with diecast starter.   |
| 370B  | 34387       | Decal, Instruction Can be used on HM80 with stamped steel      |
|       |             | recoil starter.  |
| 0705  | 0.470.4     |  |
|       | 34704       | Decal, Air cleaner   |
| 395   | 33329D      | Starter Motor Kit (110-120 Volt) This 110-120 volt starter     |
|       |             | motor kit may have been added to this engine. It can be        |
|       |             | added only if cylinder hasdrilled and tapped starter mounting  |
|       |             | bosses and a ring gear flywheel. Refer to service number       |
|       |             | stamped on end cap of motor, or on decal for identification.   |
|       |             | Ref  |
|       |             |  |

| Ref # | Part Number      | Qty | Description   |
|-------|------------------|-----|---|
| 408   | 35570            |     | Screen Seal (Can be used on HM80 with stamped steel recoil starter)   |
| 409   | 35569            |     | Spacer (Can be used on HM80 with stamped steel recoil starter)  |
| 410   | 730573           |     | Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)  |
| 411   | 35568            |     | Debris Screen (Can be used on HM80 with stamped steel recoil starter)   |
| 413   | 650907           |     | Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)   |
|       | 730130<br>730572 |     | Exh.Adapter Kit (Incl.274,277)(Use as req.)<br>Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on<br>HM80 with die cast starter)                        |
| 429   | 650868           |     | Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).  |
| 430   | 611077           |     | Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).   |
| 431   | 590609           |     | Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)        |
| 431   | 590610           |     | Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).   |
| 432   | 611078           |     | A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).  |
| 432   | 611079           |     | D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).  |
| 433   | 590611           |     | Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 433   | 590636           |     | Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).         |
|       |                  |     |   |

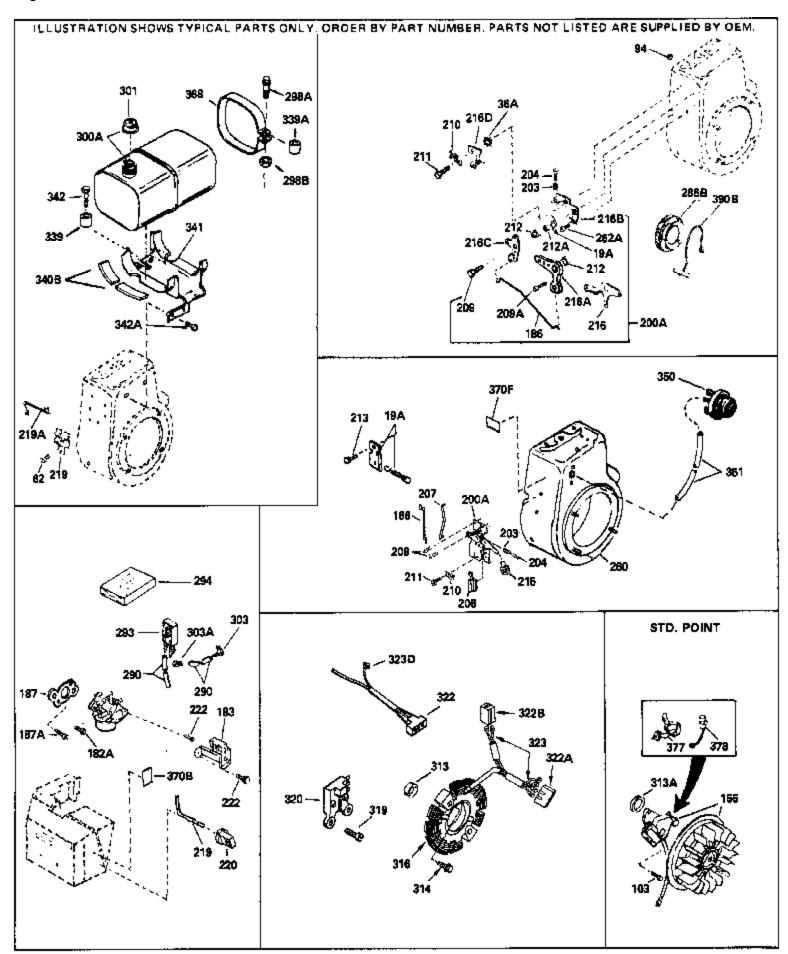

| Dof # | Dort Number             | h. Description   |
|-------|-------------------------|--|
|       | Part Number Q<br>650814 | ty Description Screw, Torx T-15, 10-24 x 1"                    |
|       | 34664                   | Control Bracket (Incl.19,203,204,206, 209)                     |
|       | 31342                   | Spring, Compression  |
|       | 650549                  | Screw, 5-40 x 7/16"  |
|       | 610973                  | Terminal Assy. (Use as required)                               |
|       | 33878                   | Link, Governor-to-throttle                                     |
|       | 650821                  | Screw, 10-32 x 1/2"  |
|       | 28820                   | Screw, 10-32 x 1/2"  |
|       | 34833B                  | Blower Housing (For electric starter)                          |
|       | 35824                   | Muffler (Optional quiet muffler)                               |
|       | 650696                  | Screw, 5/16-18x2-3/4" (Used with 276A)                         |
|       | 29774                   | Fuel Line (Braided 8-1/4")(21 cm)(As req.)                     |
|       | 30705                   | Fuel Line (Braided 16")(41 cm)(Use as req.)                    |
|       | 30962                   | Fuel Line (Braided 32")(81 cm)(Use as req.)                    |
|       | 410144B                 | Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)                     |
|       | 33032                   | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16" |
| 301   | 33032                   | I.D.)  |
|       |                         |  |
| 301   | 34210                   | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile)         |
|       |                         | (1-3/16" I.D)  |
| 301   | 35355                   | Fuel Cap (Red plastic) (1-1/2" I.D.)                           |
|       | 610823                  | Connector  |
|       | 610822                  | Terminal, Male   |
|       | 35038                   | Spacer, Tank   |
|       | 34155                   | Bracket, Fuel tank mounting                                    |
|       | 650561                  | Screw, 1/4-20 x 5/8"   |
|       | 34870                   | Decal, Instruction Can be used on HM80 with diecast starter.   |
|       | 34387                   | Decal, Instruction Can be used on HM80 with stamped steel      |
|       |                         | recoil starter.  |
| 27∩R  | 34704                   | Decal, Air cleaner   |
|       | 35570                   | Screen Seal (Can be used on HM80 with stamped steel            |
| 400   | 33370                   | recoil starter)  |
|       |                         | •  |
| 409   | 35569                   | Spacer (Can be used on HM80 with stamped steel recoil          |
|       |                         | starter)   |
| 410   | 730573                  | Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be     |
|       |                         | used on HM80 with stamped steel recoil starter)                |
| 444   | 2550                    | •  |
| 411   | 35568                   | Debris Screen (Can be used on HM80 with stamped steel          |
|       |                         | recoil starter)  |
| 413   | 650907                  | Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with              |
|       |                         | stamped steel recoil starter)                                  |
| 125   | 730572                  | Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on      |
| 720   | 150512                  | HM80 with die cast starter)                                    |
|       |                         | ,  |
| 429   | 650868                  | Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to  |
|       |                         | Mechanics Handbook for installation instructions).             |
| 430   | 611077                  | Alternator, Add on (Use as required) (Refer to Mechanics       |
| -50   |                         | Handbook for installation instructions).                       |
| 404   | E00000                  | •  |
| 431   | 590609                  | Centering tube (Use with engines equipped with die cast        |
|       |                         | aluminum starter)(Use as required) (Refer to Mechanics         |
|       |                         | Handbook for installation instructions)                        |
| 431   | 590610                  | Centering tube (Use as required) (Refer to Mechanics           |
|       |                         | Handbook for installation instructions).                       |
|       |                         |  |

| Ref # Part Number<br>432 611078 | Qty Description  A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).                                       |
|---------------------------------|---|
| 432 611079                      | <ul> <li>D.C. Charging Connector (Use as required) (Refer to<br/>Mechanics Handbook for installation instructions).</li> </ul>                                |
| 433 590611                      | Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 433 590636                      | Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).         |