



| Dof # | Part Number Qty | Description |
|-------|-----------------|--|
| | | |
| | 35385 | Cylinder (Incl. 2,20,72,72A) (3-1/8" Bore) |
| | 27652 | Pin, Dowel |
| | 30700 | Yoke, Governor |
| 15 | 30699C | Rod Assy., Governor (Incl. 15A & 15B) |
| 15B | 650494 | Screw, 6-40 x 5/16" |
| 16 | 33454 | Governor Lever Assy. |
| | 29916 | Clamp, Governor lever |
| | 650548 | Screw, 8-32 x 5/16" |
| | 35319 | Seal, Oil |
| | 35326 | Baffle, Blower housing |
| | | |
| | 650561 | Screw, 1/4-20 x 5/8" |
| | 35425A | Crankshaft |
| | 29826 | Screw, 10-32 x 3/4" |
| | 29918 | Lockwasher, # 8 E.T. |
| 37 | 29216 | Nut & Lockwasher, 10-32 "Keps" |
| 37A | 30322 | Locknut, Hex "Keps", 8-32 |
| 38 | 29642 | Ring, Retaining |
| | 34552 | Piston, Pin & Ring Set (Std.)(Incl. 4 1,42 & 43) |
| | 34553 | Piston, Pin & Ring Set (.010)(Incl. 4 1,42 & 43) |
| | 34554 | Piston, Pin & Ring Set (.020)(Incl. 4 1,42 & 43) |
| | 34329A | |
| | | Piston & Pin Ass'y (Std.)(Incl. 43) |
| | 34330A | Piston & Pin Ass'y (.010)(Incl. 43) |
| | 34331A | Piston & Pin Ass'y (.020)(Incl. 43) |
| | 34332 | Ring Set (Std.) |
| | 34333 | Ring Set (.010) |
| 42 | 34334 | Ring Set (.020) |
| 43 | 27888 | Piston Pin Retaining Ring |
| 45 | 35373A | Connecting Rod (Incl. 49) |
| | 650908 | Connecting Rod Bolt |
| | 650882 | Connecting Rod Bolt |
| | 34034 | Lifter, Valve |
| | 35374 | |
| | | Dipper, Oil |
| | 35375 | Camshaft (MCR) |
| | 33273A | Extension, Blower housing |
| | 650128 | Screw, 10-24 x 1/2" |
| | 35262 | * Gasket, Cylinder cover |
| | 35376 | Cover, Cylinder (Incl. 75, 80, 311 & 312) |
| 71 | 35377 | Bushing, Crankshaft |
| 72 | 27642 | Plug, Oil drain |
| 75 | 35319 | Seal, Oil |
| | 31845 | Shaft, Mechanical governor |
| | 30590A | Washer, Flat |
| | 35378 | Gear Assy., Governor (Incl. 81) |
| | | |
| | 30588A | Spool, Governor |
| | 29193 | Ring, Retaining |
| | 650833 | Screw, 1/4-20 x 1-3/16" |
| | 650832 | Screw, 1/4-20 x 1-11/16" |
| 89 | 32589 | Key, Flywheel |
| 90 | 611090 | Flywheel |
| 92 | 650880 | Washer, Belleville |
| | 650881 | Nut, Hex (5/8-18) (Add-on alternator) |
| | 33450 | Nut Lock, 10-32 |
| | 30886A | Spring, Extension |
| | 30845A | . • |
| | | Bolt, Governor spring adjusting |
| 97 | 25425 | Lockwasher, Heavy split, #10 (Buy loc ally) |
| | 35135 | Lamination Assy., Solid State |
| | 610118 | Cover, Spark plug (Use as required) |
| 101A | 27276 | Cover, Spark plug |
| | | |

| | Dr.(N. ober | Description |
|------|-------------|--|
| | | / Description |
| | 650872 | Stud, Lamination mounting |
| | 650814 | Screw, Torx T-15, 10-24 x 1" |
| | 34041A | * Gasket, Head |
| | 34030A | Head, Cylinder |
| | 27878A | Exhaust Valve (Std.) (Incl. 151) |
| | 27880A | Exhaust Valve (1/32" OS) (Incl. 151) |
| 126 | 34035 | Intake Valve (Std.) (Incl. 151) |
| 126 | 34036 | Intake Valve (1/32" OS) (Incl. 151) |
| 127A | 26073 | Washer, Flat (Use as required) |
| 127A | 650570 | Washer, Flat (Use as required) |
| 127 | 650691 | Washer (Use as req., but not w/6021A screw) |
| | 650690 | Washer, Belleville |
| | 650727 | Screw, 5/16-18 x 1-3/4" (Use as requi red) |
| | 650694A | Screw, 5/16-18 x 2" (Use as required) |
| | 6021A | Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse with |
| 100/ | 0021A | 650691 washer) |
| | | 000091 Washer) |
| 131A | 650713 | Screw, 5/16-18 x 5/8" (Use as require d) |
| 131A | 792028 | Screw, 5/16-18 x 7/8" (Use as require d) |
| | 33636 | Resistor Spark Plug (RJ17LM) |
| | 33369 | Bracket, Governor gear |
| | 650836 | Screw, 10-24 x 1/2" |
| | 35862 | Seal Assy., Intake valve |
| | 27882 | • |
| | | Cap, Upper valve spring |
| | 27881 | Spring, Valve |
| | 32581 | Cap, Lower valve spring |
| | 27896A | * Gasket, Breather cover |
| | 28423 | Body, Breather |
| | 28424 | Element, Breather |
| | 28425 | Cover, Valve spring |
| 173 | 35350 | Tube, Breather |
| 174 | 650128 | Screw, 10-24 x 1/2" |
| 174 | 650597 | Screw, 10-24 x 5/8" |
| 178 | 29752 | Nut & Lockwasher, 1/4-28 |
| | 30593 | Clip, Primer line (Use as required) |
| | 30088A | Screw, 1/4-28 x 1" |
| | 33263 | * Gasket, Carburetor |
| | 34707 | Pipe, Intake |
| | 610973 | Terminal Assy. (Use as required) |
| | 33878 | Link, Governor-to-throttle |
| | 650378 | |
| | | Screw, Torx T-30, 5/16-18 x 1-1/8 " |
| | 27915A | * Gasket, Intake pipe |
| | 650824 | Stud, 1/4-20 x 7.33 (Use as required) |
| 228A | 650851 | Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru |
| | | elbow) |
| 242 | 33267 | Bracket, Air cleaner |
| | 33269A | Cover, Air cleaner |
| | 33375D | Blower Housing (For electric starter) |
| | 650788 | |
| | | Screw, 5/16-18 x 3/4" (Use as require d) |
| | 29747B | Screw, 5/16-24 x 21/32" |
| | 33272B | Cover, Cylinder head |
| 275B | 391026 | Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler |
| | | can be used on any model.) |
| | 33013 | Cover, Starter bubble |
| 282 | 650760 | Screw, 8-32 x 3/8" |
| 285 | 32125 | Cup, Starter |
| 286A | 35194 | Screen, Starter |
| | | |


| Ref # | Part Number | Qty | Description |
|-------|------------------|-----|--|
| | 29752 | | Nut & Lockwasher, 1/4-28 |
| 290 | 29774 | | Fuel Line (Braided 8-1/4")(21 cm)(As req.) |
| 290 | 30705 | | Fuel Line (Braided 16")(41 cm)(Use as req.) |
| | 30962 | | Fuel Line (Braided 32")(81 cm)(Use as req.) |
| | 26460 | | Clamp, Fuel line (Use as required) |
| | 650665 | | Screw, 1/4-15 x 7/8" |
| | 34156A | | Fuel Tank (Incl. 292 & 301) NOTE: These tanks were builtwith different size fuel inlet openings. Tanks with the 1-3/16" I.D. opening use fuel cap 34210. Tanks with the |
| | | | 1-1/2" I.D. opening use fuel cap 35355. |
| 301 | 410144B | | Fuel Cap (White Plastic)(Std)(1-1/2" I.D.) |
| 301 | 33032 | | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16" I.D.) |
| 301 | 34210 | | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (1-3/16" I.D) |
| 301 | 35355 | | Fuel Cap (Red plastic) (1-1/2" I.D.) |
| | 29673 | | * Gasket, Oil fill |
| | 35941 | | Dipstick (Incl. 306) |
| | 29443 | | Clip, Fuel line (Use as required) |
| | 34246 | | Clip, Ground wire (Use as required) |
| | 34154 | | Plate, Fuel tank mounting |
| | 34155 | | Bracket, Fuel tank mounting |
| | 650561 | | Screw, 1/4-20 x 5/8" |
| | 34870 | | · |
| | | | Decal, Instruction Can be used on HM80 with diecast starter. |
| | 34686 34387 | | Decal, Name |
| 3706 | 34301 | | Decal, Instruction Can be used on HM80 with stamped steel recoil starter. |
| 370 | 34346 | | Decal, Instruction |
| 379 | 631021 | | Inlet Needle, Seat & Clip Assy. |
| 380 | 632351 | | Carburetor (Incl. 184) (Refer to Division 5, Section A, page 188 for breakdown or Fiche18A-1, Grid F-5) |
| 390 | 590479 | | Rewind Starter (Refer to Division 5, Section C, page 30 for breakdown or Fiche 18A-1, Grid G-5) |
| 395 | 33329D | | Starter Motor Kit (110-120 Volt) This 110-120 volt starter motor kit may have been added to this engine. It can be added only if cylinder hasdrilled and tapped starter mounting bosses and a ring gear flywheel. Refer to service number stamped on end cap of motor, or on decal for identification. Ref |
| 420 | 33279G 730225 | | Gasket Set (Incl. items marked*) SAE 30, 4-Cycle Engine Oil (Quart) |
| 421 | 730226 | | SAE 5W30, 4-Cycle Engine Oil (Quart) |

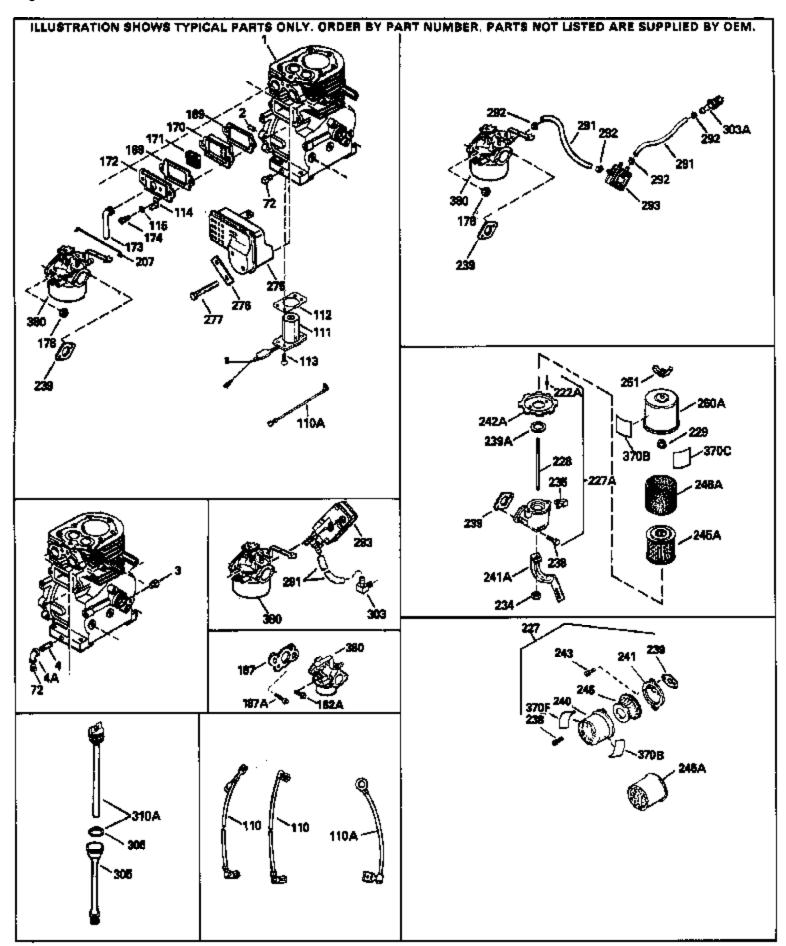

| Ref # | Part Number | Otv | Description |
|-------|-----------------|-----|--|
| | 35385 | αιy | Cylinder (Incl. 2,20,72,72A) (3-1/8" Bore) |
| | 27652 | | Pin, Dowel |
| | 27642 | | Plug, Oil drain |
| 97 | | | Lockwasher, Heavy split, #10 (Buy loc ally) |
| | 27276 | | Cover, Spark plug |
| | 26073 | | Washer, Flat (Use as required) |
| | 650570 | | Washer, Flat (Use as required) |
| | 27896A | | * Gasket, Breather cover |
| | 28423 | | · |
| | 28424 | | Body, Breather Element, Breather |
| | 28425 | | · |
| | | | Cover, Valve spring |
| | 35350 650438 | | Tube, Breather |
| | 650128 | | Screw, 10-24 x 1/2" |
| | 650597 | | Screw, 10-24 x 5/8" |
| | 29752 | | Nut & Lockwasher, 1/4-28 |
| | 30593 | | Clip, Primer line (Use as required) |
| | 33878 | | Link, Governor-to-throttle |
| 221 | 730127 | | Air Cleaner Ass'y. (Incl.238,239,240,241,243,245 & 370) |
| | | | (Use as required) |
| 227 | 730164 | | Air Cleaner Ass'y. (Incl. 238, 239, 240, 241, 243 & 245) (Use |
| | | | as required) |
| 0004 | 050004 | | • , |
| | 650824 | | Stud, 1/4-20 x 7.33 (Use as required) |
| 228A | 650851 | | Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru |
| | | | elbow) |
| 239 | 27272A | | * Gasket, Air cleaner |
| 239 | 27272A | | * Gasket, Air cleaner |
| 241 | 33266 | | Bracket, Air cleaner |
| 242 | 33267 | | Bracket, Air cleaner |
| | 28820 | | Screw, 10-32 x 1/2" |
| | 34700 | | Element, Air cleaner |
| | 33268 | | Element, Air cleaner |
| | 33269A | | Cover, Air cleaner |
| | 650513 | | Nut, Wing, 1/2-20 |
| | 391026 | | Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler |
| 05 | - | | can be used on any model.) |
| 000.4 | 05404 | | • |
| | 35194 | | Screen, Starter |
| | 26460 | | Clamp, Fuel line (Use as required) |
| | 29673 | | * Gasket, Oil fill |
| | 35941 | | Dipstick (Incl. 306) |
| | 34870 | | Decal, Instruction Can be used on HM80 with diecast starter. |
| 370B | 34387 | | Decal, Instruction Can be used on HM80 with stamped steel |
| | | | recoil starter. |
| 380 | 632351 | | Carburetor (Incl. 184) (Refer to Division 5, Section A, page |
| 300 | 002001 | | 188 for breakdown or Fiche18A-1, Grid F-5) |
| | | | 100 15. Distriction of the following of |

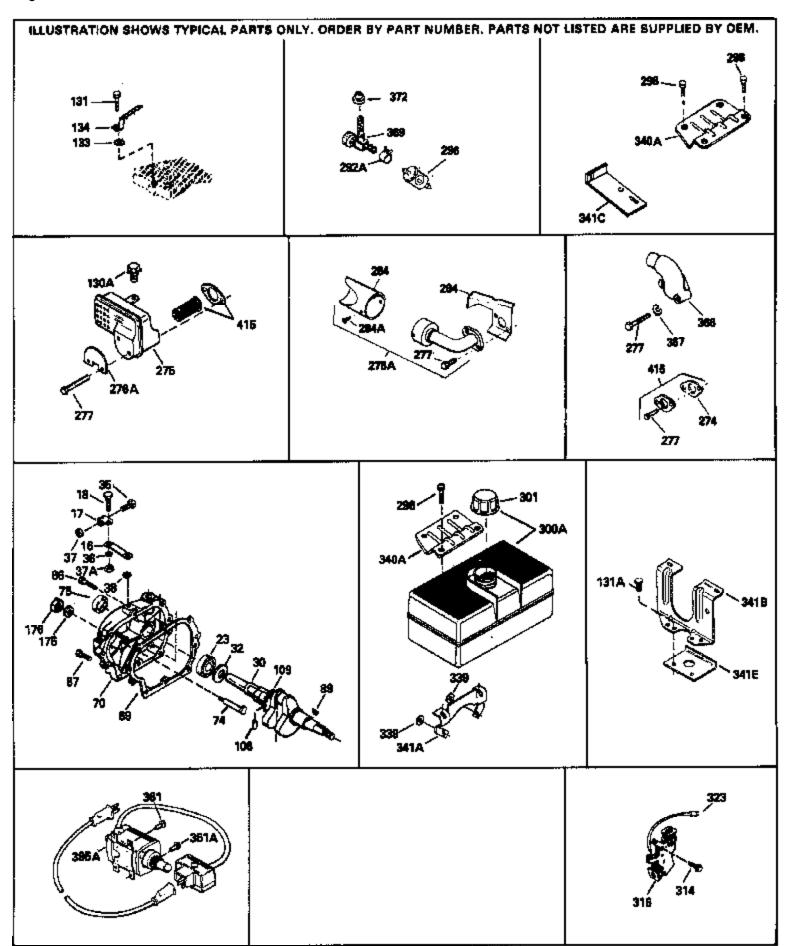

| Ref # | Part Number G | ty Description |
|-------------|---------------|--|
| | 33454 | Governor Lever Assy. |
| | 29916 | Clamp, Governor lever |
| 18 | 650548 | Screw, 8-32 x 5/16" |
| | 35425A | Crankshaft |
| | 29826 | Screw, 10-32 x 3/4" |
| | 29918 | Lockwasher, # 8 E.T. |
| | 29216 | Nut & Lockwasher, 10-32 "Keps" |
| | 30322 | Locknut, Hex "Keps", 8-32 |
| | 29642 | Ring, Retaining |
| | 35262 | * Gasket, Cylinder cover |
| | 35376 | Cover, Cylinder (Incl. 75, 80, 311 & 312) |
| | 31855 | Retainer, Bearing |
| | 35319 | Seal, Oil |
| | 650833 | Screw, 1/4-20 x 1-3/16" |
| | 650832 | Screw, 1/4-20 x 1-3/10" |
| | 32589 | · |
| 97 | 32309 | Key, Flywheel Lockwasher, Heavy split, #10 (Buy loc ally) |
| | 27276 | |
| | 26073 | Cover, Spark plug |
| | 650570 | Washer, Flat (Use as required) |
| | | Washer, Flat (Use as required) |
| ISUA | 6021A | Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse with |
| | | 650691 washer) |
| 131 | 650802 | Screw, 1/4-20 x 5/8" (Use as required) |
| 131 | 650737 | Screw, 1/4-20 x 1/2" (Use as required) |
| 131 | 650738 | Screw, 1/4-20 x 5/8" (Use as required) |
| 131A | 650713 | Screw, 5/16-18 x 5/8" (Use as require d) |
| | 792028 | Screw, 5/16-18 x 7/8" (Use as require d) |
| | 650890 | Washer, Lock, 5/16" |
| | 30747 | Clip, Spark plug shorting |
| | 30593 | Clip, Primer line (Use as required) |
| | 650824 | Stud, 1/4-20 x 7.33 (Use as required) |
| | 650851 | Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru |
| | | elbow) |
| 040 | 20207 | , |
| | 33267 | Bracket, Air cleaner |
| | 33269A | Cover, Air cleaner |
| | 35865 | Gasket, Exhaust (Use as required) |
| 2/5B | 391026 | Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler |
| | | can be used on any model.) |
| 286A | 35194 | Screen, Starter |
| 298 | 650665 | Screw, 1/4-15 x 7/8" |
| | 410144B | Fuel Cap (White Plastic)(Std)(1-1/2" I.D.) |
| 301 | 33032 | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16" |
| | | I.D.) |
| 204 | 24240 | • |
| <i>3</i> 01 | 34210 | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) |
| | | (1-3/16" I.D) |
| | 35355 | Fuel Cap (Red plastic) (1-1/2" I.D.) |
| 339 | 35038 | Spacer, Tank |
| 370J | 34870 | Decal, Instruction Can be used on HM80 with diecast starter. |
| 415 | 730130 | Exh.Adapter Kit (Incl.274,277)(Use as req.) |

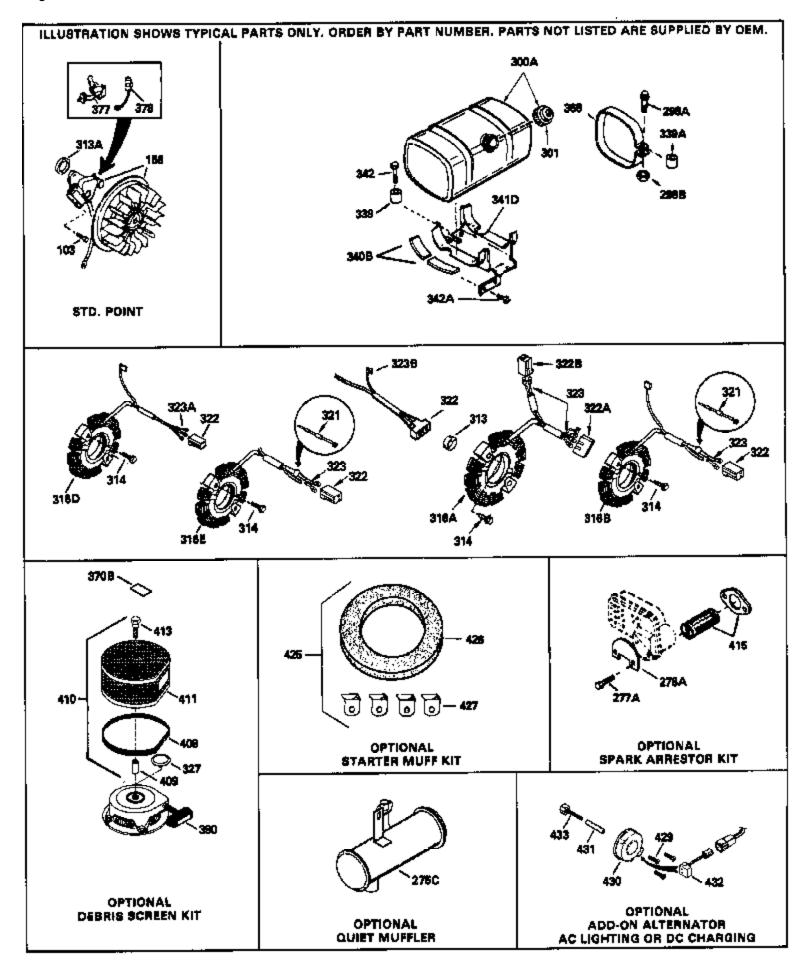

| D-f # | Deat Ni week on | Ot . Dans | aller Aller a |
|-------------|-----------------|-----------|---|
| | Part Number | Qty Descr | |
| 97 | 07070 | | washer, Heavy split, #10 (Buy loc ally) |
| | 27276 | | r, Spark plug |
| | 650814 | | w, Torx T-15, 10-24 x 1" |
| | 26073 | | ner, Flat (Use as required) |
| 127A | 650570 | | ner, Flat (Use as required) |
| 179B | 30593 | Clip, F | Primer line (Use as required) |
| 228A | 650824 | Stud, | 1/4-20 x 7.33 (Use as required) |
| 228A | 650851 | Stud, | 1/4-20 x 8.1 (Use as required) (Used with drilled thru |
| | | elbow | |
| 2/12 | 33267 | Brack | ket, Air cleaner |
| | 33269A | | r, Air cleaner |
| | 35824 | | er (Optional quiet muffler) |
| | | | |
| 2/30 | 391026 | | er (Incl. 284, 284A & 416A) (This spark arresting muffler |
| | | can b | pe used on any model.) |
| 277A | 650696 | Screw | w, 5/16-18x2-3/4" (Used with 276A) |
| 286A | 35194 | Scree | en, Starter |
| 301 | 410144B | | Cap (White Plastic)(Std)(1-1/2" I.D.) |
| | 33032 | | Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16" |
| 00. | 55552 | I.D.) | cap (i tea i ideale) (opairi i tealeani, zeri i ieine) (i e, ie |
| 004 | 0.404.0 | • | |
| 301 | 34210 | | Cap (Red Plastic) (Spurt Resistant, High Profile) |
| | | (1-3/1 | [6" I.D) |
| 301 | 35355 | Fuel (| Cap (Red plastic) (1-1/2" I.D.) |
| | 35038 | | er, Tank |
| | 650561 | | ν, 1/4-20 x 5/8" |
| | 34870 | | II, Instruction Can be used on HM80 with diecast starter. |
| | 34387 | | I, Instruction Can be used on HM80 with stamped steel |
| 3700 | 54507 | | l starter. |
| | | | |
| 390 | 590479 | | nd Starter (Refer to Division 5, Section C, page 30 for |
| | | break | down or Fiche 18A-1, Grid G-5) |
| 408 | 35570 | Scree | en Seal (Can be used on HM80 with stamped steel |
| 100 | 5557.5 | | I starter) |
| | | | , |
| 409 | 35569 | Space | er (Can be used on HM80 with stamped steel recoil |
| | | starte | er) |
| 410 | 730573 | Debris | is Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be |
| 410 | 130313 | | on HM80 with stamped steel recoil starter) |
| | | useu | of this live with startiped steel recoil starter) |
| 411 | 35568 | Debris | is Screen (Can be used on HM80 with stamped steel |
| | | recoil | starter) |
| 440 | 650007 | Corou | E/16 10 x 1 E/0" (Con be used on LIMO) with |
| 413 | 650907 | | w, 5/16-18 x 1-5/8" (Can be used on HM80 with |
| | | stamp | ped steel recoil starter) |
| 415 | 730130 | Exh.A | Adapter Kit (Incl.274,277)(Use as req.) |
| | 730572 | | er Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on |
| 120 | | | 0 with die cast starter) |
| | | | , |
| 429 | 650868 | | w, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to |
| | | Mech | nanics Handbook for installation instructions). |
| 13 U | 611077 | Δltarn | nator, Add on (Use as required) (Refer to Mechanics |
| +30 | 011011 | | Abook for installation instructions). |
| | | | , |
| 431 | 590609 | Cente | ering tube (Use with engines equipped with die cast |
| | | alumir | inum starter)(Use as required) (Refer to Mechanics |
| | | | lbook for installation instructions) |
| | | | · |

| | Part Number | Qty | Description |
|-----|-------------|-----|---|
| 431 | 590610 | | Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 432 | 611078 | | A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 432 | 611079 | | D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 433 | 590611 | | Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 433 | 590636 | | Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions). |