



Dof #	Dort Number Oth	Description
	Part Number Qty	
	35385	Cylinder (Incl. 2,20,72,72A) (3-1/8" Bore)
	27652	Pin, Dowel
	650494	Screw, 6-40 x 5/16"
	30699C	Rod Assy., Governor (Incl. 15A & 15B)
15A	30700	Yoke, Governor
16	33454	Governor Lever Assy.
17	29916	Clamp, Governor lever
	650548	Screw, 8-32 x 5/16"
	35326	Baffle, Blower housing
	650561	Screw, 1/4-20 x 5/8"
	35441A	Crankshaft
	29826	Screw, 10-32 x 3/4"
	29918	Lockwasher, #8 E.T.
	30322	Locknut, Hex "Keps", 8-32
	29216	Nut & Lockwasher, 10-32 "Keps"
	29642	Ring, Retaining
	35373A	Rod Assy., Connecting (Incl. 49)
	650908	Bolt, Connecting rod
	650882	Bolt, Connecting rod
	34034	Lifter, Valve
	35374	Dipper, Oil
	35375	Camshaft (MCR)
60	33273A	Extension, Blower housing
65	650128	Screw, 10-24 x 1/2"
69	35262	* Gasket, Cylinder cover
70	35376	Cover, Cylinder (Incl. 75, 80, 311 & 312)
71	35377	Bushing, Crankshaft
	27642	Plug, Oil drain
	35319	Seal, Oil
	31845	Shaft, Mechanical governor
	30590A	Washer, Flat
	35378	Gear Assy., Governor (Incl. 81)
	30588A	Spool, Governor
	29193	Ring, Retaining
	650833	Screw, 1/4-20 x 1-3/16"
	650832	Screw, 1/4-20 x 1-1/16"
	32589	Key, Flywheel
	611090	Flywheel
	650880	Washer, Belleville
	650881	Nut, Hex (5/8-18) (Add-on alternator)
	33450	Nut Lock, 10-32
	30886A	Spring, Extension
	30845A	Bolt, Governor spring adjusting
97		Lockwasher, Heavy split, #10 (Buy loc ally)
	35135	Lamination Assy., Solid State
101	610118	Cover, Spark plug (Use as required)
102	650872	Stud, Lamination mounting
103	650814	Screw, Torx T-15, 10-24 x 1"
	34041A	* Gasket, Head
	34030A	Head, Cylinder
	27878A	Exhaust Valve (Std.) (Incl. 151)
	27880A	Exhaust Valve (1/32" OS) (Incl. 151)
	34035	Intake Valve (Std.) (Incl. 151)
	34036	Intake Valve (1/32" OS) (Incl. 151)
	26073	Washer, Flat (Use as required)
	650570	Washer, Flat (Use as required)
	650691	Washer (Use as req., but not w/6021A screw)
	650690	Washer, Belleville
120	00000	vvasi ici, Delieville

Ref #	Part Number	Qty	Description
	650727		Screw, 5/16-18 x 1-3/4" (Use as requi red)
130A	6021A		Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse with 650691 washer)
130	650694A		Screw, 5/16-18 x 2" (Use as required)
	650713		Screw, 5/16-18 x 5/8" (Use as require d)
	792028		Screw, 5/16-18 x 7/8" (Use as require d)
	33636		Resistor Spark Plug (RJ17LM)
	33369		Bracket, Governor gear
	650836		Screw, 10-24 x 1/2"
	27882		Cap, Upper valve spring
	35862		Seal Assy., Intake valve
	27881		Spring, Valve
	32581		and the second s
	27896A		Cap, Lower valve spring * Capket Breather cover
			* Gasket, Breather cover
	28423		Body, Breather
	28424		Element, Breather
	28425		Cover, Valve spring
	35350		Tube, Breather
	650128		Screw, 10-24 x 1/2"
	650597		Screw, 10-24 x 5/8"
	29752		Nut & Lockwasher, 1/4-28
	30593		Clip, Primer line (Use as required)
	30088A		Screw, 1/4-28 x 1"
	33263		* Gasket, Carburetor
	34707		Pipe, Intake
206	610973		Terminal Assy. (Use as required)
207	33878		Link, Governor-to-throttle
223	650378		Screw, Torx T-30, 5/16-18 x 1-1/8 "
224	27915A		* Gasket, Intake pipe
228A	650824		Stud, 1/4-20 x 7.33 (Use as required)
228A	650851		Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru
			elbow)
242	33267		Bracket, Air cleaner
250B	33269A		Cover, Air cleaner
260	33375D		Blower Housing (For electric starter)
261	650788		Screw, 5/16-18 x 3/4" (Use as require d)
262	29747B		Screw, 5/16-24 x 21/32"
265	33272B		Cover, Cylinder head
275	33280A		Muffler
275B	391026		Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler
			can be used on any model.)
276	31588		Plate, Muffler locking
	650729		Screw, 5/16-18 x 3-3/16"
281	33013		Cover, Starter bubble
	650760		Screw, 8-32 x 3/8"
	35287		Cup, Starter
	35446		Screen, Starter (Stationary)
	29752		Nut & Lockwasher, 1/4-28
	29774		Fuel Line (Braided 8-1/4")(21 cm)(As req.)
	30705		Fuel Line (Braided 16")(41 cm)(Use as req.)
	30962		Fuel Line (Braided 32")(81 cm)(Use as req.)
	26460		Clamp, Fuel line (Use as required)
	650665		Screw, 1/4-15 x 7/8"
230			, -


Ref #	Part Number	Qty	Description
	34156A		Fuel Tank (Incl. 292 & 301) NOTE: These tanks were builtwith different size fuel inlet openings. Tanks with the 1-3/16" I.D. opening use fuel cap 34210. Tanks with the 1-1/2" I.D. opening use fuel cap 35355.
	410144B 33032		Fuel Cap (White Plastic)(Std)(1-1/2" I.D.) Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16" I.D.)
301	34210		Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (1-3/16" I.D)
306 310A 325 325 327 340 341 342	35355 29673 35941 29443 34246 35392 34154 34155 650561 34387		Fuel Cap (Red plastic) (1-1/2" I.D.) * Gasket, Oil fill Dipstick (Incl. 306) Clip, Fuel line (Use as required) Clip, Ground wire (Use as required) Plug, Starter Plate, Fuel tank mounting Bracket, Fuel tank mounting Screw, 1/4-20 x 5/8" Decal, Instruction Can be used on HM80 with stamped steel recoil starter.
370 370J 370A 379	34346 34416 34870 34686 631021 632351		Decal, Instruction Decal, Instruction Decal, Instruction Can be used on HM80 with diecast starter. Decal, Name Inlet Needle, Seat & Clip Assy. Carburetor (Incl. 184) (Refer to Division 5, Section A, page 188 for breakdown or Fiche18A-1, Grid F-5)
390A	590633		Rewind Starter (Refer to Division 5, Section C, page 30 for breakdown or Fiche 18A-1, Grid G-5)
395	33329D		Starter Motor Kit (110-120 Volt) This 110-120 volt starter motor kit may have been added to this engine. It can be added only if cylinder hasdrilled and tapped starter mounting bosses and a ring gear flywheel. Refer to service number stamped on end cap of motor, or on decal for identification. Ref
420	33279G 730225 730226		Gasket Set (Incl. items marked*) SAE 30, 4-Cycle Engine Oil (Quart) SAE 5W30, 4-Cycle Engine Oil (Quart)

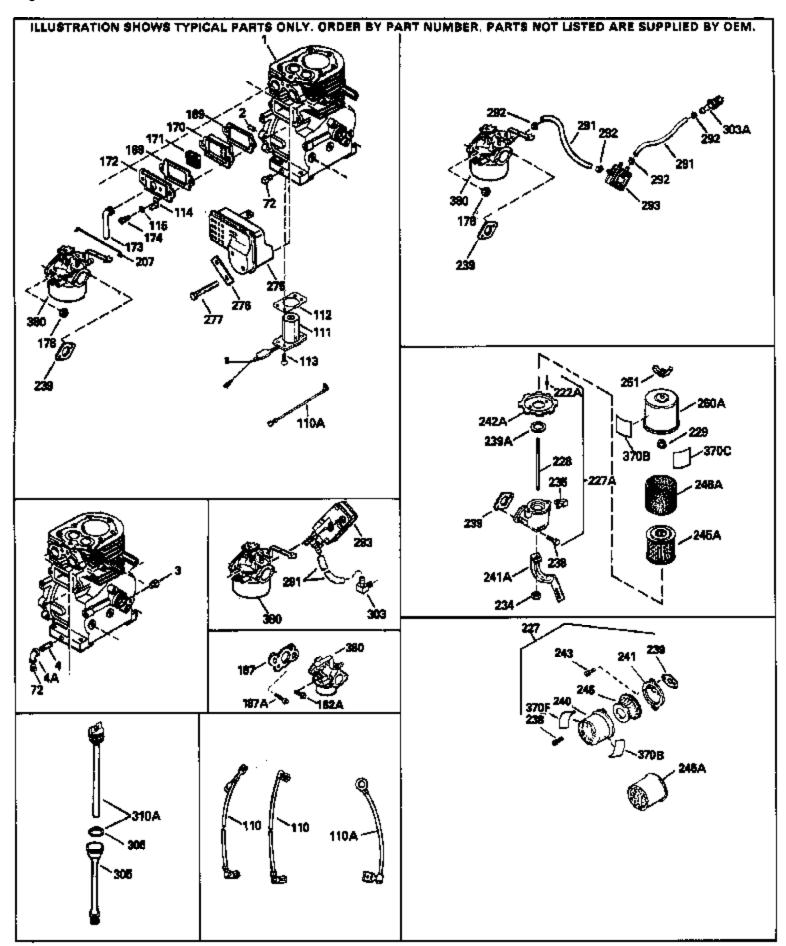

Ref #	Part Number	Qty	Description
1	35385		Cylinder (Incl. 2,20,72,72A) (3-1/8" Bore)
2	27652		Pin, Dowel
72	27642		Plug, Oil drain
97			Lockwasher, Heavy split, #10 (Buy loc ally)
127A	26073		Washer, Flat (Use as required)
127A	650570		Washer, Flat (Use as required)
169	27896A		* Gasket, Breather cover
170	28423		Body, Breather
171	28424		Element, Breather
172	28425		Cover, Valve spring
173	35350		Tube, Breather
174	650128		Screw, 10-24 x 1/2"
174	650597		Screw, 10-24 x 5/8"
178	29752		Nut & Lockwasher, 1/4-28
179B	30593		Clip, Primer line (Use as required)
207	33878		Link, Governor-to-throttle
227	730127		Air Cleaner Ass'y. (Incl.238,239,240,241,243,245 & 370)
			(Use as required)
227	730164		Air Cleaner Ass'y. (Incl. 238, 239, 240, 241, 243 & 245) (Use
<i></i> ,	700101		as required)
			• •
	650824		Stud, 1/4-20 x 7.33 (Use as required)
228A	650851		Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru
			elbow)
239	27272A		* Gasket, Air cleaner
	27272A		* Gasket, Air cleaner
	33266		Bracket, Air cleaner
	33267		Bracket, Air cleaner
	28820		Screw, 10-32 x 1/2"
245A	34700		Element, Air cleaner
	33268		Element, Air cleaner
250B	33269A		Cover, Air cleaner
251	650513		Nut, Wing, 1/2-20
	33280A		Muffler
275B	391026		Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler
			can be used on any model.)
276	31588		Plate, Muffler locking
	650729		Screw, 5/16-18 x 3-3/16"
	26460		Clamp, Fuel line (Use as required)
	29673		* Gasket, Oil fill
	35941		Dipstick (Incl. 306)
	34870		Decal, Instruction Can be used on HM80 with diecast starter.
	34387		Decal, Instruction Can be used on HM80 with stamped steel
3/UD)1 00 <i>1</i>		recoil starter.
			iecon starter.
380	632351		Carburetor (Incl. 184) (Refer to Division 5, Section A, page
			188 for breakdown or Fiche18A-1, Grid F-5)

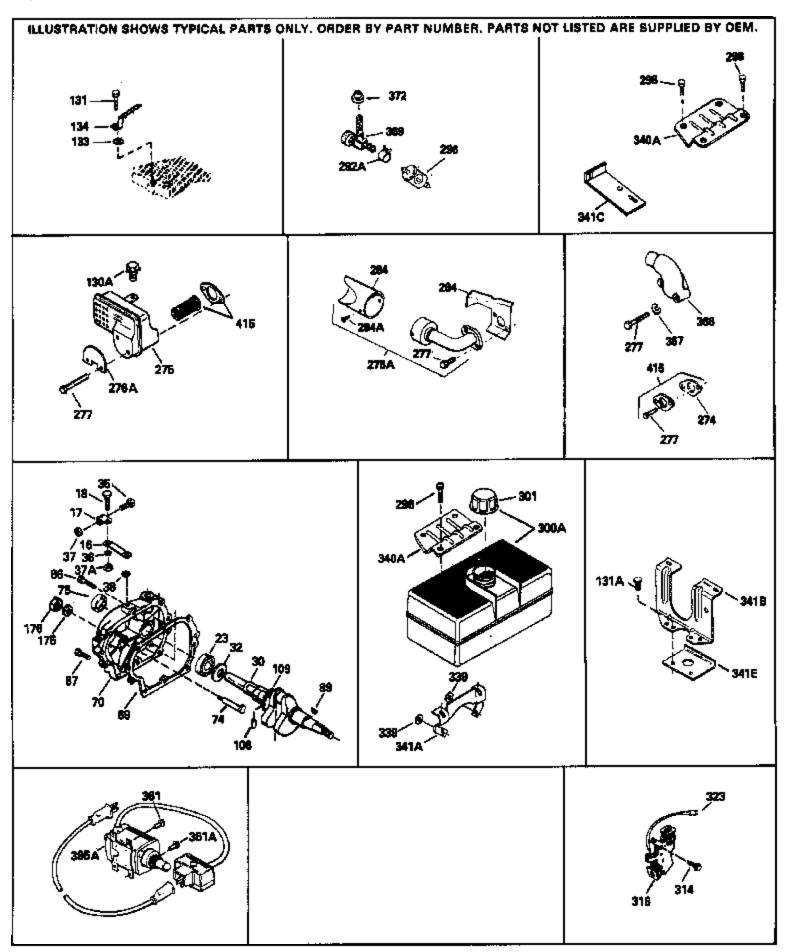

Ref #	Part Number	Qty	Description
16	33454		Governor Lever Assy.
17	29916		Clamp, Governor lever
18	650548		Screw, 8-32 x 5/16"
30	35441A		Crankshaft
35	29826		Screw, 10-32 x 3/4"
	29918		Lockwasher, # 8 E.T.
	30322		Locknut, Hex "Keps", 8-32
	29216		Nut & Lockwasher, 10-32 "Keps"
	29642		
	35262		Ring, Retaining * Cooket Culinder cover
			* Gasket, Cylinder cover
	35376		Cover, Cylinder (Incl. 75, 80, 311 & 312)
	31855		Retainer, Bearing
	35319		Seal, Oil
	650833		Screw, 1/4-20 x 1-3/16"
	650832		Screw, 1/4-20 x 1-11/16"
89	32589		Key, Flywheel
97			Lockwasher, Heavy split, #10 (Buy loc ally)
127A	26073		Washer, Flat (Use as required)
127A	650570		Washer, Flat (Use as required)
130A	6021A		Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse with
			650691 washer)
131	650802		Screw, 1/4-20 x 5/8" (Use as required)
131	650737		Screw, 1/4-20 x 1/2" (Use as required)
131	650738		Screw, 1/4-20 x 5/8" (Use as required)
131A	650713		Screw, 5/16-18 x 5/8" (Use as require d)
131A	792028		Screw, 5/16-18 x 7/8" (Use as require d)
133	650890		Washer, Lock, 5/16"
	30747		Clip, Spark plug shorting
	30593		Clip, Primer line (Use as required)
	650824		Stud, 1/4-20 x 7.33 (Use as required)
	650851		Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru
			elbow)
242	33267		Bracket, Air cleaner
	33269A		Cover, Air cleaner
	35865		Gasket, Exhaust (Use as required)
-	391026		Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler
2.02	55.525		can be used on any model.)
275	33280A		Muffler
	650729		Screw, 5/16-18 x 3-3/16"
	650665		Screw, 1/4-15 x 7/8"
	410144B		Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
	33032		Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16"
301	3000Z		I.D.)
301	34210		Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (1-3/16" I.D)
301	35355		Fuel Cap (Red plastic) (1-1/2" I.D.)
	35038		Spacer, Tank
	34870		Decal, Instruction Can be used on HM80 with diecast starter.
	730130		Exh.Adapter Kit (Incl.274,277)(Use as req.)
.10			

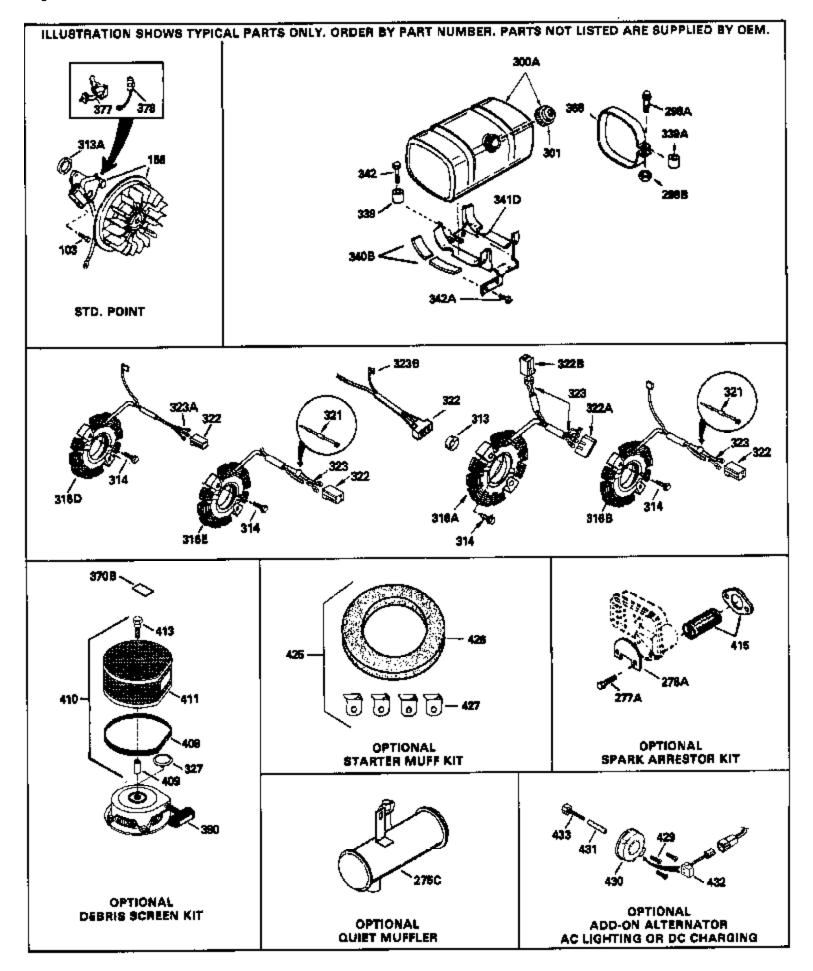

97		Qty	Description Lockwasher, Heavy split, #10 (Buy loc ally)
	650814		Screw, Torx T-15, 10-24 x 1"
127A	26073		Washer, Flat (Use as required)
127A	650570		Washer, Flat (Use as required)
179B	30593		Clip, Primer line (Use as required)
	650824		Stud, 1/4-20 x 7.33 (Use as required)
	650851		Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru
ZZOA	000001		elbow)
242	33267		Bracket, Air cleaner
250B	33269A		Cover, Air cleaner
275C	35824		Muffler (Optional quiet muffler)
275B	391026		Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler
			can be used on any model.)
277A	650696		Screw, 5/16-18x2-3/4" (Used with 276A)
301	410144B		Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
	33032		Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16"
			I.D.)
301	34210		Fuel Cap (Red Plastic) (Spurt Resistant, High Profile)
			(1-3/16" I.D)
301	35355		Fuel Cap (Red plastic) (1-1/2" I.D.)
327	35392		Plug, Starter
339	35038		Spacer, Tank
	650561		Screw, 1/4-20 x 5/8"
	34387		Decal, Instruction Can be used on HM80 with stamped steel
3705	34007		recoil starter.
370.1	34870		Decal, Instruction Can be used on HM80 with diecast starter.
	35570		Screen Seal (Can be used on HM80 with stamped steel
-100	33570		recoil starter)
409	35569		Spacer (Can be used on HM80 with stamped steel recoil starter)
410	730573		Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
110	700070		used on HM80 with stamped steel recoil starter)
411	35568		Debris Screen (Can be used on HM80 with stamped steel
			recoil starter)
413	650907		Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
			stamped steer recoil starter)
415	730130		Exh.Adapter Kit (Incl.274,277)(Use as req.)
425	730572		Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on
•			HM80 with die cast starter)
429	650868		Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to
120			Mechanics Handbook for installation instructions).
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics
.00	5.1.6.1		Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast
101			aluminum starter)(Use as required) (Refer to Mechanics
			Handbook for installation instructions)
			i iai iaboon toi ii istalialioti ii isti uoliolis)
431	590610		Centering tube (Use as required) (Refer to Mechanics
			Handbook for installation instructions).
	044070		,
432	611078		A.C. Lighting Connector (Use as required) (Refer to
			Mechanics Handbook for installation instructions).

Ref # Par	rt Number	Qty	Description
432 611	1079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433 590	0611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433 590	0636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).