



Pof #	Port Number On	/ Description
	Part Number Qty	
	35385	Cylinder (Incl. 2,20,72,72A) (3-1/8" Bore)
	27652	Pin, Dowel
	30700	Yoke, Governor
	30699C	Rod Assy., Governor (Incl. 15A & 15B)
15B	650494	Screw, 6-40 x 5/16"
16	33454	Governor Lever Assy.
17	29916	Clamp, Governor lever
18	650548	Screw, 8-32 x 5/16"
	35319	Seal, Oil
	35326	Baffle, Blower housing
	650561	Screw, 1/4-20 x 5/8"
	35441A	Crankshaft
	29826	Screw, 10-32 x 3/4"
	29918	Lockwasher, # 8 E.T.
	29216	
		Nut & Lockwasher, 10-32 "Keps"
	30322	Locknut, Hex "Keps", 8-32
	29642	Ring, Retaining
	35373A	Rod Assy., Connecting (Incl. 49)
	650908	Bolt, Connecting rod
	650882	Bolt, Connecting rod
	34034	Lifter, Valve
	35374	Dipper, Oil
50	35375	Camshaft (MCR)
60	33273A	Extension, Blower housing
65	650128	Screw, 10-24 x 1/2"
69	35262	* Gasket, Cylinder cover
70	35376	Cover, Cylinder (Incl. 75, 80, 311 & 312)
	35377	Bushing, Crankshaft
	27642	Plug, Oil drain
	35319	Seal, Oil
	31845	Shaft, Mechanical governor
	30590A	Washer, Flat
	35378	Gear Assy., Governor (Incl. 81)
	30588A	Spool, Governor
	29193	Ring, Retaining
	650833	Screw, 1/4-20 x 1-3/16"
	650832	Screw, 1/4-20 x 1-11/16"
	32589	•
		Key, Flywheel
	611090	Flywheel
	650880	Washer, Belleville
	650881	Nut, Hex (5/8-18) (Add-on alternator)
	33450	Nut Lock, 10-32
	30886A	Spring, Extension
	30845A	Bolt, Governor spring adjusting
97		Lockwasher, Heavy split, #10 (Buy loc ally)
	35135	Lamination Assy., Solid State
101	610118	Cover, Spark plug (Use as required)
102	650872	Stud, Lamination mounting
103	650814	Screw, Torx T-15, 10-24 x 1"
119	34041A	* Gasket, Head
	34030A	Head, Cylinder
	27878A	Exhaust Valve (Std.) (Incl. 151)
	27880A	Exhaust Valve (1/32" OS) (Incl. 151)
	34035	Intake Valve (Std.) (Incl. 151)
	34036	Intake Valve (1/32" OS) (Incl. 151)
	26073	Washer, Flat (Use as required)
	650570	Washer, Flat (Use as required)
	650691	Washer (Use as required) Washer (Use as req., but not w/6021A screw)
121	000001	vadiner (Ose as req., but not wood in solew)

Dof #	Part Number Qt	/ Description
	650690	/ Description Washer, Belleville
	650727	Screw, 5/16-18 x 1-3/4" (Use as requi red)
	650694A	
		Screw, 5/16-18 x 2" (Use as required)
130A	6021A	Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse with
		650691 washer)
131A	650713	Screw, 5/16-18 x 5/8" (Use as require d)
	792028	Screw, 5/16-18 x 7/8" (Use as require d)
	33636	Resistor Spark Plug (RJ17LM)
	33369	Bracket, Governor gear
	650836	Screw, 10-24 x 1/2"
	27882	Cap, Upper valve spring
	35862	Seal Assy., Intake valve
	27881	Spring, Valve
	32581	Cap, Lower valve spring
	27896A	* Gasket, Breather cover
	28423	·
	28424	Body, Breather
		Element, Breather
	28425	Cover, Valve spring
	35350	Tube, Breather
	650128	Screw, 10-24 x 1/2"
	650597	Screw, 10-24 x 5/8"
	29752	Nut & Lockwasher, 1/4-28
	30593	Clip, Primer line (Use as required)
	30088A	Screw, 1/4-28 x 1"
	33263	* Gasket, Carburetor
	34707	Pipe, Intake
	610973	Terminal Assy. (Use as required)
	33878	Link, Governor-to-throttle
	650378	Screw, Torx T-30, 5/16-18 x 1-1/8 "
	27915A	* Gasket, Intake pipe
	650824	Stud, 1/4-20 x 7.33 (Use as required)
228A	650851	Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru
		elbow)
242	33267	Bracket, Air cleaner
	33269A	Cover, Air cleaner
	33375D	Blower Housing (For electric starter)
	650788	Screw, 5/16-18 x 3/4" (Use as require d)
	29747B	Screw, 5/16-24 x 21/32"
	33272B	Cover, Cylinder head
	33280A	Muffler
	391026	Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler
2130	391020	can be used on any model.)
		can be used on any model.)
276	31588	Plate, Muffler locking
277	650729	Screw, 5/16-18 x 3-3/16"
281	33013	Cover, Starter bubble
282	650760	Screw, 8-32 x 3/8"
285	35287	Cup, Starter
	35446	Screen, Starter (Stationary)
	29752	Nut & Lockwasher, 1/4-28
	29774	Fuel Line (Braided 8-1/4")(21 cm)(As req.)
	30705	Fuel Line (Braided 16")(41 cm)(Use as req.)
	30962	Fuel Line (Braided 32")(81 cm)(Use as req.)
	26460	Clamp, Fuel line (Use as required)
	650665	Screw, 1/4-15 x 7/8"
200		


Ref #	Part Number	Qty Description
	34156A	Fuel Tank (Incl. 292 & 301) NOTE: These tanks were builtwith different size fuel inlet openings. Tanks with the 1-3/16" I.D. opening use fuel cap 34210. Tanks with the 1-1/2" I.D. opening use fuel cap 35355.
	410144B 33032	Fuel Cap (White Plastic)(Std)(1-1/2" I.D.) Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16" I.D.)
301	34210	Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (1-3/16" I.D)
301 306 310A 325 325 327 340 341 342	35355 35650 29673 35941 29443 34246 35392 34154 34155 650561 34387	Fuel Cap (Red plastic) (1-1/2" I.D.) Fuel Cap (Red) * Gasket, Oil fill Dipstick (Incl. 306) Clip, Fuel line (Use as required) Clip, Ground wire (Use as required) Plug, Starter Plate, Fuel tank mounting Bracket, Fuel tank mounting Screw, 1/4-20 x 5/8" Decal, Instruction Can be used on HM80 with stamped steel recoil starter.
370 370A 379	34870 34346 34686 631021 632351	Decal, Instruction Can be used on HM80 with diecast starter. Decal, Instruction Decal, Name Inlet Needle, Seat & Clip Assy. Carburetor (Incl. 184) (Refer to Division 5, Section A, page 188 for breakdown or Fiche18A-1, Grid F-5)
390A	590633	Rewind Starter (Refer to Division 5, Section C, page 30 for breakdown or Fiche 18A-1, Grid G-5)
395	33329D	Starter Motor Kit (110-120 Volt) This 110-120 volt starter motor kit may have been added to this engine. It can be added only if cylinder hasdrilled and tapped starter mounting bosses and a ring gear flywheel. Refer to service number stamped on end cap of motor, or on decal for identification. Ref
420	33279G 730225 730226	Gasket Set (Incl. items marked*) SAE 30, 4-Cycle Engine Oil (Quart) SAE 5W30, 4-Cycle Engine Oil (Quart)

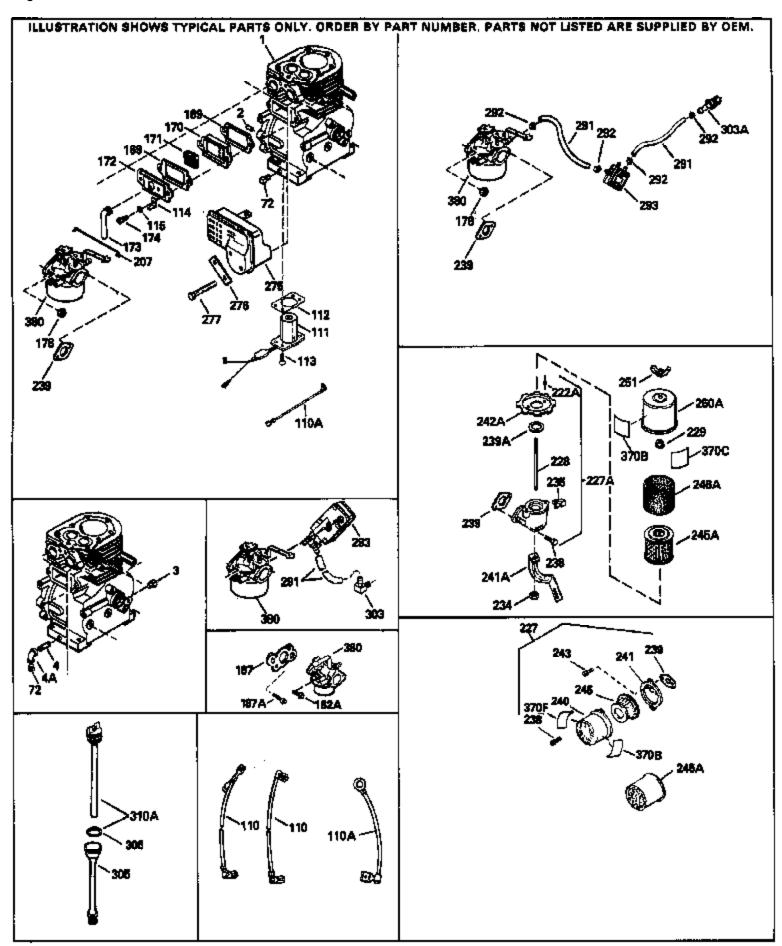

Ref #	Part Number	Qty	Description
1	35385		Cylinder (Incl. 2,20,72,72A) (3-1/8" Bore)
2	27652		Pin, Dowel
72	27642		Plug, Oil drain
97			Lockwasher, Heavy split, #10 (Buy loc ally)
127A	26073		Washer, Flat (Use as required)
127A	650570		Washer, Flat (Use as required)
169	27896A		* Gasket, Breather cover
170	28423		Body, Breather
171	28424		Element, Breather
172	28425		Cover, Valve spring
173	35350		Tube, Breather
174	650128		Screw, 10-24 x 1/2"
174	650597		Screw, 10-24 x 5/8"
178	29752		Nut & Lockwasher, 1/4-28
179B	30593		Clip, Primer line (Use as required)
207	33878		Link, Governor-to-throttle
227	730127		Air Cleaner Ass'y. (Incl.238,239,240,241,243,245 & 370)
			(Use as required)
227	730164		Air Cleaner Ass'y. (Incl. 238, 239, 240, 241, 243 & 245) (Use
<i></i> ,	700101		as required)
			• •
	650824		Stud, 1/4-20 x 7.33 (Use as required)
228A	650851		Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru
			elbow)
239	27272A		* Gasket, Air cleaner
	27272A		* Gasket, Air cleaner
	33266		Bracket, Air cleaner
	33267		Bracket, Air cleaner
	28820		Screw, 10-32 x 1/2"
245A	34700		Element, Air cleaner
	33268		Element, Air cleaner
250B	33269A		Cover, Air cleaner
251	650513		Nut, Wing, 1/2-20
	33280A		Muffler
275B	391026		Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler
			can be used on any model.)
276	31588		Plate, Muffler locking
	650729		Screw, 5/16-18 x 3-3/16"
	26460		Clamp, Fuel line (Use as required)
	29673		* Gasket, Oil fill
	35941		Dipstick (Incl. 306)
	34870		Decal, Instruction Can be used on HM80 with diecast starter.
	34387		Decal, Instruction Can be used on HM80 with stamped steel
3/UD	<del>)1</del> 00 <i>1</i>		recoil starter.
			iecon starter.
380	632351		Carburetor (Incl. 184) (Refer to Division 5, Section A, page
			188 for breakdown or Fiche18A-1, Grid F-5)

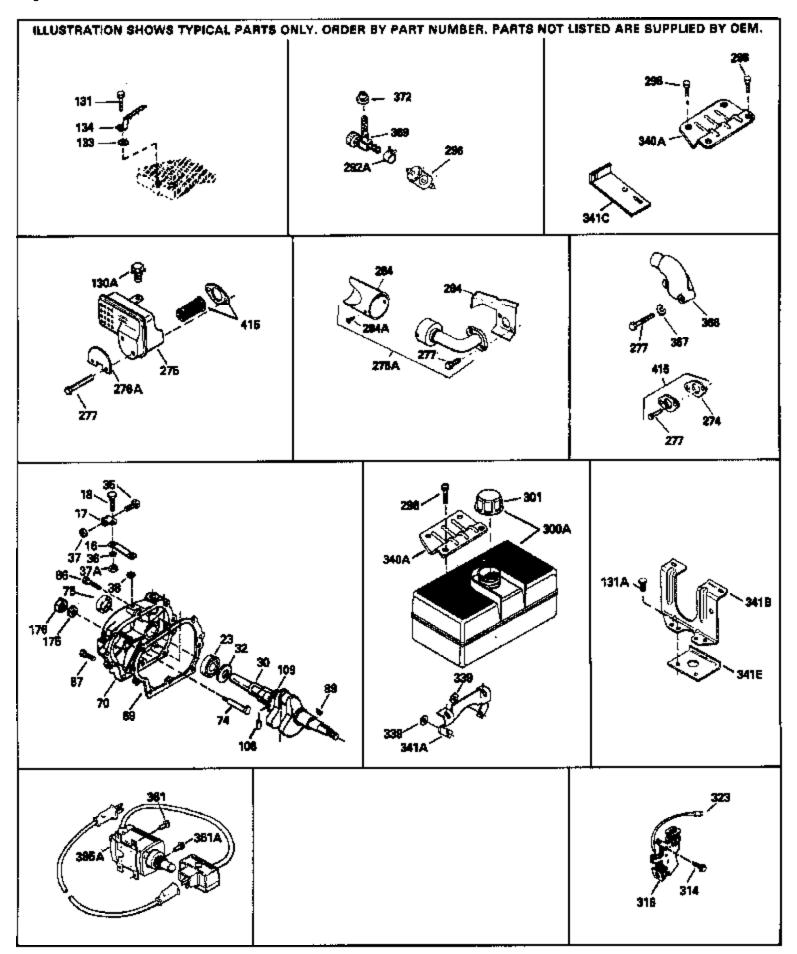

16 17 18 30 35 36 37A 37 38 69 70 74 75 86 87 89 97 127A 127A	Part Number  33454 29916 650548 35441A 29826 29918 30322 29216 29642 35262 35376 31855 35319 650832 32589  26073 650570 6021A	Qty	Description Governor Lever Assy. Clamp, Governor lever Screw, 8-32 x 5/16" Crankshaft Screw, 10-32 x 3/4" Lockwasher, # 8 E.T. Locknut, Hex "Keps", 8-32 Nut & Lockwasher, 10-32 "Keps" Ring, Retaining * Gasket, Cylinder cover Cover, Cylinder (Incl. 75, 80, 311 & 312) Retainer, Bearing Seal, Oil Screw, 1/4-20 x 1-3/16" Screw, 1/4-20 x 1-11/16" Key, Flywheel Lockwasher, Heavy split, #10 (Buy loc ally) Washer, Flat (Use as required) Washer, Flat (Use as required) Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse with 650691 washer)
131 131A 131A 131A 133 134 179B 228A	650802 650737 650738 650713 792028 650890 30747 30593 650824 650851		Screw, 1/4-20 x 5/8" (Use as required ) Screw, 1/4-20 x 1/2" (Use as required ) Screw, 1/4-20 x 5/8" (Use as required ) Screw, 5/16-18 x 5/8" (Use as require d) Screw, 5/16-18 x 7/8" (Use as require d) Washer, Lock, 5/16" Clip, Spark plug shorting Clip, Primer line (Use as required) Stud, 1/4-20 x 7.33 (Use as required) Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru elbow)
250B 274	33267 33269A 35865 391026		Bracket, Air cleaner Cover, Air cleaner Gasket, Exhaust (Use as required) Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler can be used on any model.)
277 298 301	33280A 650729 650665 410144B 33032		Muffler Screw, 5/16-18 x 3-3/16" Screw, 1/4-15 x 7/8" Fuel Cap (White Plastic)(Std)(1-1/2" I.D.) Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16" I.D.)
301	34210		Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (1-3/16" I.D)
301 339 370J	35355 35650 35038 34870 730130		Fuel Cap (Red plastic) (1-1/2" I.D.) Fuel Cap (Red) Spacer, Tank Decal, Instruction Can be used on HM80 with diecast starter. Exh.Adapter Kit (Incl.274,277)(Use as req.)

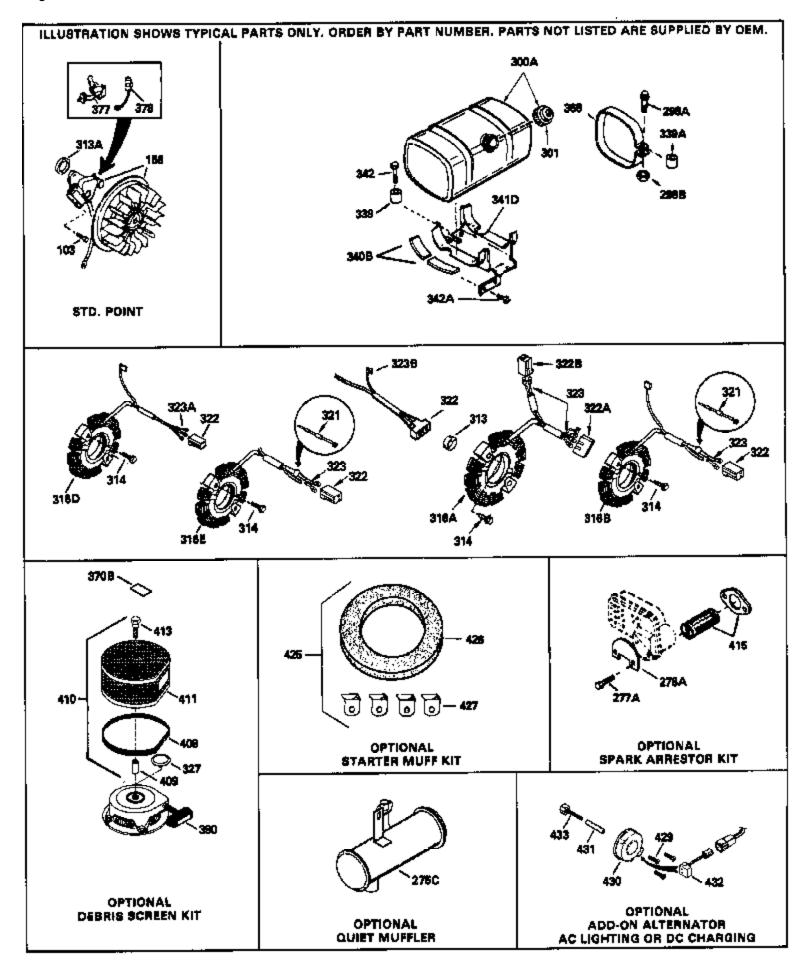

Dof #	Dort Number Ot	, Description
Rei #_ 97	Part Number Qty	Description Lockwasher, Heavy split, #10 (Buy loc ally)
	GE0011	
	650814	Screw, Torx T-15, 10-24 x 1"
	26073	Washer, Flat (Use as required)
	650570	Washer, Flat (Use as required)
	30593	Clip, Primer line (Use as required)
228A	650824	Stud, 1/4-20 x 7.33 (Use as required)
228A	650851	Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru
		elbow)
242	33267	Bracket, Air cleaner
250B	33269A	Cover, Air cleaner
	35824	Muffler (Optional quiet muffler)
	391026	Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler
2,00	001020	can be used on any model.)
277Δ	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
	410144B	Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
	33032	
301	33032	Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16" I.D.)
301	34210	Fuel Cap (Red Plastic) (Spurt Resistant, High Profile)
331	0.2.0	(1-3/16" I.D)
301	35355	Fuel Cap (Red plastic) (1-1/2" I.D.)
	35650	Fuel Cap (Red)
	35392	Plug, Starter
	35038	Spacer, Tank
	650561	Screw, 1/4-20 x 5/8"
	34387	Decal, Instruction Can be used on HM80 with stamped steel
3706	34307	recoil starter.
370J	34870	Decal, Instruction Can be used on HM80 with diecast starter.
	35570	Screen Seal (Can be used on HM80 with stamped steel
		recoil starter)
		,
409	35569	Spacer (Can be used on HM80 with stamped steel recoil starter)
		•
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
		used on HM80 with stamped steel recoil starter)
411	35568	Debris Screen (Can be used on HM80 with stamped steel
111		recoil starter)
		,
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with
		stamped steel recoil starter)
115	730130	Exh.Adapter Kit (Incl.274,277)(Use as req.)
	730572	
425	730372	Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on
		HM80 with die cast starter)
429	650868	Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to
		Mechanics Handbook for installation instructions).
	044077	,
430	611077	Alternator, Add on (Use as required) (Refer to Mechanics
		Handbook for installation instructions).
431	590609	Centering tube (Use with engines equipped with die cast
101		aluminum starter)(Use as required) (Refer to Mechanics
		Handbook for installation instructions)
		,
431	590610	Centering tube (Use as required) (Refer to Mechanics
		Handbook for installation instructions).
		•

Ref #	Part Number	Qty	Description
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).