


| | | y Description |
|----|---------|---|
| | 33674B | Cylinder (Incl. 2, 3 & 4) (2-13/16" B ore) |
| 2 | 26727 | Pin, Dowel |
| 3 | 27642 | Oil Drain Plug |
| 3 | 28582 | Oil Drain Plug |
| 4 | 32600 | Seal, Oil |
| 5 | 32644A | Intake Valve (Std.) (Incl. 9) |
| 5 | 32645A | Intake Valve (1/32" OS) (Incl. 9) |
| 6 | 29313C | Exhaust Valve (Std.) (Íncl. 9) |
| | 29315C | Exhaust Valve (1/32" OS) (Incl. 9) |
| | 31672 | Spring, Valve |
| | 31673 | Cap, Lower valve spring |
| | 610951 | Key, Flywheel |
| | 33677A | Crankshaft |
| | 32323 | Washer, Thrust |
| | 33876 | Gasket, Stator |
| | 33562B | Piston & Pin Ass'y.(Std.)(Incl.16)(2-13/16") |
| | 33563B | Piston & Pin Ass'y. (.010" OS) (Incl. 16) |
| | 33564B | Piston & Pin Ass'y. (.020" OS) (Incl. 16) |
| | 34535 | |
| | 34536 | Piston, Pin & Ring Set (Std.) (2-13/1 6" Bore) Piston, Pin & Ring Set (.010" OS) |
| | | |
| | 34537 | Piston, Pin & Ring Set (.020" OS) Ping Set (Std.) (2.13/16" Poro) |
| | 33567 | Ring Set (Std.) (2-13/16" Bore) |
| | 33568 | Ring Set (.010" OS) |
| | 33569 | Ring Set (.020" OS) |
| | 20381 | Ring, Piston pin retaining |
| | 32875 | Rod Assy., Connecting (Incl. 18 & 20) |
| | 32610A | Bolt, Connecting Rod |
| | 32654 | Dipper, Oil |
| | 27241 | Lifter, Valve |
| | 33158 | Camshaft |
| | 32700A | Cover, Cylinder (Incl. 24, 29, 30, 31 & 106) |
| | 27897 | Seal, Oil |
| | 27677A | * Gasket, Cylinder cover |
| | 650451 | Screw, 1/4-20 x 1" (Use as required) |
| | 650488 | Screw, 1/4-20 x 1-1/4" (Use as requir ed) |
| 30 | 27625 | Plug, Oil filler (Incl. 31) |
| 31 | 29673 | * Gasket, Oil fill plug |
| 32 | 33554A | Gasket, Cylinder head |
| 33 | 33016A | Head, Cylinder(Incl. 35) |
| 34 | 26073 | Washer (Not used on late production) |
| 34 | 650691 | Washer (Use as required) |
| 35 | 650694A | Screw, 5/16-18 x 2" (Use as required) |
| | 650818 | Screw, 5/16-18 x 1-1/2" (Use as required) |
| | 650865 | Screw, 5/16-18 x 2" (Use as required) |
| | 6021A | Screw, 5/16-18 x 1-1/2" (As reg;not w /650691) |
| | 33636 | Resistor Spark Plug (RJ-8C) |
| | 31619A | * Gasket, Breather |
| | 31337A | Breather Ass'y. (Incl. 38 & 40) |
| | 31410 | Element, Breather |
| | 650128 | Screw, 10-24 x 1/2" |
| | 33673A | * Gasket, Intake (1/32" thick) |
| | 33666 | Pipe, Intake |
| | 30646 | Screw, 1/4-20 x 1-3/8" |
| | 32698 | Link, Governor-to-throttle |
| | 31510 | Lever, Governor |
| | 31334 | Rod, Governor (Incl. 67) |
| | 33342 | |
| | 650561 | Baffle, Blower housing Screw, 1/4-20 x 5/8" |
| | | |


| Ref # Part | 1 | Description |
|--|--|--|
| 66 2975 66 67 2827 68 650 69 292 70 3366 | 277 0168 212 663C | Nut & Lockwasher Assy., 1/4-28 (As re quired) Pop Rivet (Purchase locally)(Use as r equired) Washer, Flat Washer, Flat Screw, 1/4-28 x 7/16" Blower Housing (For electric starter) NOTE: In original production some starters are riveted to the blower housing. Replacement housing has threaded studs. Order four nuts (29752) for remounting of starter. |
| 76 2721 77 3421 78 3020 81 2975 82 3334 83 6507 84 6201 85 6508 86 2821 87 2675 90 3171 92 6501 93 3191 94 2882 95 3334 98 3534 100 7301 | 212 200 752 341 0701 01 0870 212 756 715 0152 014 320 344 349 0127 | * Gasket, Air cleaner Bracket, Holddown Screw, 10-24 x 9/16" Nut & Lockwasher Assy., 1/4-28 Extension, Baffle Screw, 8-18 x 7/16" Screw, 1/4-28 x 7/8" Screw, 1/4-28 x 1-11/16" Spacer * Gasket, Carburetor Body, Air cleaner Screw, 8-32 x 3/8" Bracket, Air cleaner Screw, 10-32 x 1/2" Baffle, Heat Ground Wire Air Cleaner Ass'y. (Incl.76,76A,90A,91A,92,93,94, & 221A)(Use as required) |
| 105 3053 106 3057 107 3058 108 3054 109 2919 111 3418 113 6509 114 3419 115 3303 | 574 591 588A 93 83A 9561 56 9144B 932 | Washer, Flat Shaft, Mechanical governor Gear Assy.,Governor (Incl. 105) Spool Governor Ring, Retaining Fuel Tank Bracket Screw, 1/4-20 x 5/8" Fuel Tank (Incl. 115 & 123) Fuel Cap (Std.)(Wh.Plastic)(1-1/2" I. D.) Fuel Cap (Red Plastic)(1-3/16" I.D.) (Spurt resistant, Low profile) |
| 115 342 | 210 | Fuel Cap (Red Plastic)(1-3/16" I.D.) (Spurt resistant, High profile) |
| 116 6500 117 6500 118 2977 118 3090 118 3090 119 288° 121 2974 122 650° 123 2640 129 650° 139 336° 140 7920 1402 650° 1402 650° 1402 650° 1401 300° 1402 260° 141 336° | 9691 774 95 962 919 745 9128 960 9489 970A 2020 963 9628A 973 | Screw, 1/4-15 x 7/8" Washer Line, Fuel (Braided 8.25") Line, Fuel (Braided 16") Line, Fuel (Braided 32") Spring, Fuel line (Use as required) Extension, Blower housing Screw, 10-24 x 1/2" Clamp, Fuel line (Use as required) Screw, 1/4-20 x 5/8" * Gasket, Muffler Screw, 1/4-20 x 2-1/4" Screw, 1/4-20 x 1/2" (Use as required) 5/16-18 x 2-3/8" Washer, flat Muffler (Side Discharge) |

| | | Description | |
|------|---------|--|---|
| | 29443 | lip, Fuel line | |
| | 31335 | lamp, Governor lever | |
| | 650548 | crew, 8-32 x 5/16" | |
| | 610973 | erminal Assy. (Use as | |
| 203 | 33879A | Control Brkt(In.201,204, | ,205,206,207,2 09,210) |
| 204 | 650139 | crew, 8-32 x 1/2" (Use | e as required) |
| | 650152 | crew, 8-32 x 3/8" (Use | |
| | 30200 | crew, 10-24 9/16" (Use | |
| | 30322 | lut & Lockwasher (Use | |
| 206 | 650688 | crew, 10-32 x 1" (Used | d on early prod uction) |
| 206 | 650549 | crew, 5-40 x 7/16" (Us | sed on late pro duction) |
| 207 | 32924 | compression Spring (U | sed on early pro duction) |
| 207 | 31342 | | sed on late prod uction) |
| 209 | 28942 | crew, 10-32 x 3/8" | |
| 210 | 27793 | lip, Conduit | |
| 211 | 31426 | pring, Extension | |
| 213 | 650815 | Vasher, Belleville | |
| 214 | 650607 | lut, Flywheel | |
| 217 | 33668 | creen, Starter | |
| 218 | 33667 | Cup, Starter | |
| 221 | 34080 | pacer, Flywheel key | |
| 222 | 650872 | tud, Solid State Assy. | |
| 240A | 550223 | ecal, Name | |
| 240 | 34346 | Decal. Instruction | |
| 240B | 31752 | ecal, Air cleaner | |
| 243 | 631021 | nlet Needle, Seat & Cli | ip Assy. |
| | 631923 | | efer to Division 5, Section A, page 140 |
| | | or breakdown) | ,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,, |
| 245 | 610942A | n assembly. The mag urposes only. Order c | omplete magneto is not available as neto number is shown for reference component partsindividually, as shown <i>i</i> sion 5, Section B, page 35 for |
| 246 | 590420A | re riveted to the blower nreaded studs. Order f | In original production some starters rhousing. Replacement housing has four nuts (29752) for remounting of n 5, Section C, page 25 for |
| 249 | 33683B | Gasket Set (Incl. item: | s marked *) |

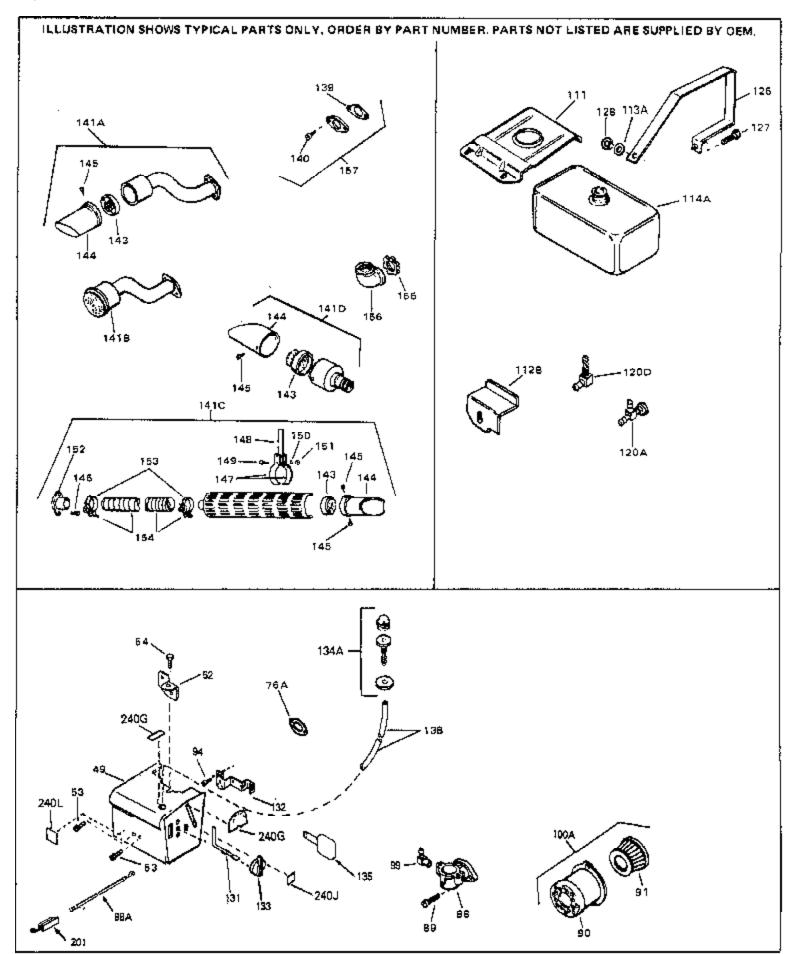

| Ref # | Part Number C | ty Description |
|-------|---------------|--|
| 13 | 33876 | Gasket, Stator |
| 90 | 31715 | Body, Air cleaner |
| 91 | 30727 | Element, Air cleaner |
| 94 | 28820 | Screw, 10-32 x 1/2" |
| 100A | 730164 | Air Cleaner Ass'y. (Incl. 76, 90, 91, 92, 93, 94, & 221B) (Use as required) |
| 111 | 34183A | Fuel Tank Bracket |
| | 34182 | Fuel Tank Bracket |
| 139 | 33670A | * Gasket, Muffler |
| 140 | 792020 | Screw, 1/4-20 x 2-1/4" |
| 140 | 30063 | Screw, 1/4-20 x 1/2" (Use as required) |
| 141D | 391026 | Muffler (Incl. 143, 144 & 145) (This spark arrester mufflercan be used on any model.) |
| 157 | 730165 | Muff.Adapter Kit (Incl.139,140)(As re quired) |
| | 610973 | Terminal Assy. (Use as required) |
| 245 | 610942A | Magneto NOTE: The complete magneto is not available as an assembly. The magneto number is shown for reference purposes only. Order component partsindividually, as shown in partslist. (Refer to Division 5, Section B, page 35 for breakdown) |

HS50-67086C Engine Parts List #3

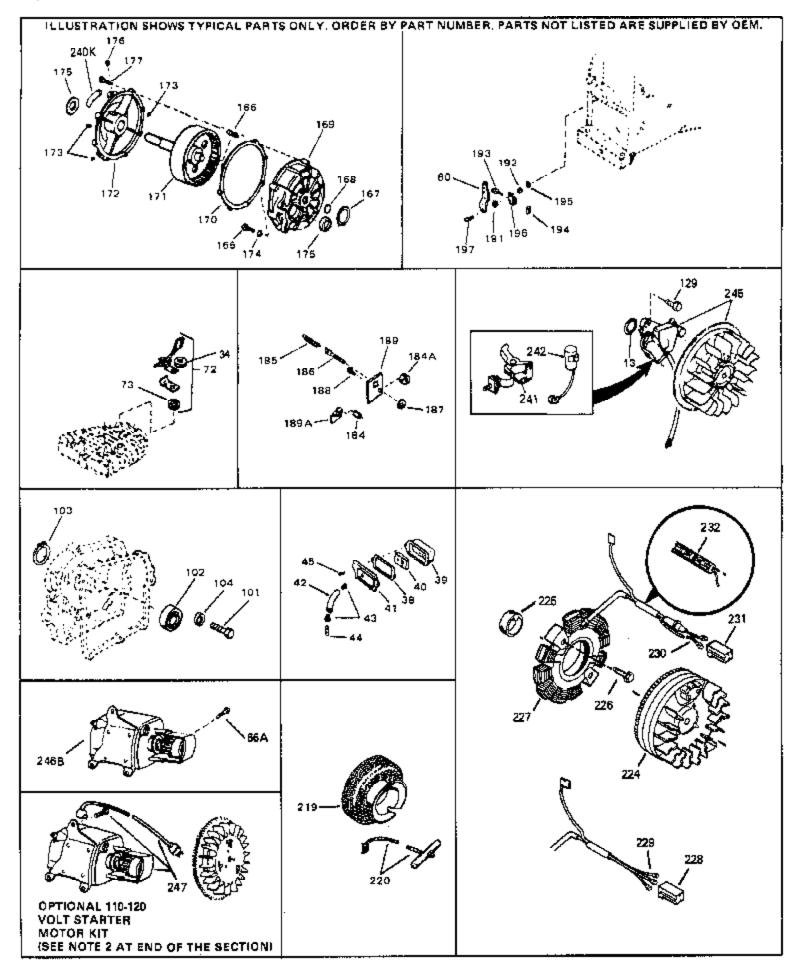

HS50-67086C Engine Parts List #3

| Ref # | Part Number 0 | ty Description |
|-------|---------------|--|
| 13 | 33876 | Gasket, Stator |
| 34 | 26073 | Washer (Not used on late production) |
| 34 | 650691 | Washer (Use as required) |
| 38 | 31619A | * Gasket, Breather |
| 40 | 31410 | Element, Breather |
| 45 | 650128 | Screw, 10-24 x 1/2" |
| 197 | 650548 | Screw, 8-32 x 5/16" |
| 219 | 34788 | Pulley, Starter rope |
| 225 | 35189 | Spacer, Coil Assy. |
| 241 | 30547A | Contact Assy., Breaker |
| 242 | 30548B | Condenser |
| 245 | 610942A | Magneto NOTE: The complete magneto is not available as an assembly. The magneto number is shown for reference purposes only. Order component partsindividually, as shown in partslist. (Refer to Division 5, Section B, page 35 for breakdown) |
| 247 | 33290D | Starter Motor Kit (110-120 Volt) This 110-120 volt starter motor kit may have been added to this engine. It can be added only if cylinder hasdrilled and tapped starter mounting bosses and a ring gear flywheel. Refer to service number stamped on end cap of motor, or on decal, for identification. Ref |