



| Ref # Par | t Number Otv | Description |
|-----------|--------------|---|
| 1 326 | • | Cylinder (Incl. 2, 20, 119 & 120) (2- 5/8") |
| 2 267 | | Pin, Dowel |
| 14 282 | | Washer, Flat |
| 15 305 | | |
| | | Rod, Governor (Incl. 14) |
| 16 326 | | Lever, Governor |
| 17 313 | 335 | Clamp, Governor lever (Clamp is positioned towardsspark |
| | | plug end on 1977-78 and latermodels. It is positioned |
| | | opposite spark plugend on earlier models.) |
| 18 650 | 05/18 | Screw, 8-32 x 5/16" |
| 19 313 | | • |
| | | Spring, Governor |
| 20 326 | | Seal, Oil |
| 30 326 | | Crankshaft (Incl. 45) |
| 32 323 | | Washer, Thrust |
| 40 348 | | Piston, Pin & Ring Set (Std.) (2-5/8" Bore) |
| 40 348 | | Piston, Pin & Ring Set (.010" OS) |
| 40 348 | | Piston, Pin & Ring Set (.020" OS) |
| 41 326 | 603B | Piston & Pin Ass'y.(Std.)(Incl. 43)(2 -5/8") |
| 41 326 | 604B | Piston & Pin Ass'y. (.010" OS) (Incl. 43) |
| 41 326 | 605B | Piston & Pin Ass'y. (.020" OS) (Incl. 43) |
| 42 348 | 354 | Ring Set (Std.) (2-5/8" Bore) |
| 42 348 | 355 | Ring Set (.010" OS) |
| 42 348 | | Ring Set (.020" OS) |
| 43 203 | | Ring, Piston pin retaining |
| 45 328 | | Rod Assy., Connecting (Incl. 18) |
| 46 326 | | Connecting Rod Bolt (Early Production) |
| 46 326 | | Bolt, Connecting rod |
| 46A 326 | | Plate, Lock (Do not use with 32610A locking type screw) |
| 48 272 | | Lifter, Exhaust valve |
| 48A 326 | | · |
| | | Lifter, Intake valve |
| 50 329 | | Camshaft (MCR) (Extended) |
| 52 299 | | Pump Assy., Oil |
| 60 297 | | Extension, Blower housing |
| 65 650 | | Screw, 10-24 x 1/2" |
| 66 300 | | Screw, Torx T-30, 1/4-20 x 1/2" |
| 69 352 | 261 | * Gasket, Mounting flange |
| 70 329 | | Flange Ass'y. (Incl. 72, 75, 76, 80 & 311) |
| 72A 955 | | Oil Drain Plug (Use as required) |
| 72 305 | | Plug, Oil drain (Incl. 73) |
| 73 288 | 333 | * Drain Plug Gasket (Do not use w/plast ic plug) |
| 75 278 | 397 | Seal, Oil |
| 76 303 | 318 | Oil Seal |
| 80 305 | 574 | Shaft, Mechanical governor |
| 81 305 | 590A | Washer, Flat |
| 82 305 | 591 | Gear Assy., Governor (Incl. 81) |
| 83 305 | | Spool, Governor |
| 84 291 | | Ring, Retaining |
| 86 650 | | Screw, 1/4-20 x 1-1/4" |
| 89 610 | | Key, Flywheel |
| 92 650 | | Washer, Belleville |
| 93 650 | | Nut, Flywheel |
| 103 650 | | Screw, 1/4-20 x 5/8" |
| 110 353 | | Ground Wire |
| | | |
| 119 326 | | * Gasket, Cylinder head |
| 120 305 | | Head, Cylinder (Incl. 131) |
| 125 326 | | Intake Valve (STD)(Incl.151) (Inverte d Ports) |
| 125 326 | | Intake Valve (1/32" OS)(Incl.151) (Inverted Ports) |
| 126 293 | 513C | Exhaust Valve (STD)(Incl. 151) (Inverted Ports) |
| | | |

| | Part Number 29315C | Qty | Description Exhaust Valve (1/32" OS)(Incl. 151) (Inverted Ports) |
|-----|-----------------------|-----|--|
| | 26073 | | Washer (Not used in late production) |
| | 650691 | | Washer (Used on late production) |
| | 6021A | | Screw, 5/16-18 x 1-1/2" (Use as requi red) |
| | 650818 | | Screw, 5/16-18 x 1-1/2" (Use as required) |
| | 650694A | | Screw, 5/16-18 x 2" (Use as required) |
| | 650697A | | Screw, 5/16-18 x 2-1/2" (Use as required) |
| | 33636 | | |
| | | | Spark Plug (J-8C) |
| | 31671 | | Valve Spring Cap) (Used in early prod uction) |
| | 31672 | | Spring, Valve |
| | 31673 | | Cap, Lower valve spring |
| | 31619A | | * Gasket, Valve spring cover |
| | 31337A | | Body Assy., Breather (Incl. 169 & 171) |
| | 31410 | | Element, Breather |
| | 650128 | | Screw, 10-24 x 1/2" |
| | 29752 | | Nut & Lockwasher, 1/4-28 |
| | 6201 | | Screw, 1/4-28 x 7/8" |
| | 6201 | | Screw, 1/4-28 x 7/8" |
| | 31688A | | * Gasket, Carburetor |
| | 32650 | | Pipe, Intake |
| | 32653 | | Link, Governor spring |
| | 32181A | | Control Bracket (Incl. 203, 204 & 206) |
| 203 | 31342 | | Spring, Compression |
| 204 | 650549 | | Screw, 5-40 x 7/16" |
| 206 | 610973 | | Terminal Assy. |
| 207 | 32652 | | Link, Governor-to-throttle |
| 209 | 30200 | | Screw, 10-24 x 9/16" |
| 210 | 27793 | | Clip, Conduit |
| 211 | 28942 | | Screw, 10-32 x 3/8" |
| 223 | 650664 | | Screw, 1/4-20 x 1-19/32" |
| 224 | 32649A | | * Gasket, Intake |
| 238 | 28820 | | Screw, 10-32 x 1/2" |
| 239 | 27272A | | * Gasket, Air cleaner |
| 260 | 32455B | | Housing, Blower NOTE: Replacement hardware may differ |
| | | | when servicing starter assy. or blower housing. Refer to |
| | | | Service Bulletin 508. |
| 004 | CEOECA | | |
| | 650561 | | Screw, 1/4 20 x 5/8" * Coolean Falsonian |
| | 26754A | | * Gasket, Exhaust |
| | 35771 | | Muffler (Incl. 274) |
| | 30063 | | Screw, Torx T-30, 1/4-20 x 1/2" (Use as req.) |
| | 590416 | | Cup, Starter |
| | 590417 | | Screen, Starter cup |
| | 29716 | | Screw, 1/4-28 x 7/16" (Use as require d) |
| | 30513 | | Screw & Lockwasher, 1/4-28 x 1/2" |
| 287 | | | Pop Rivet (Purchase locally) (3/16" d ia.) |
| | 29752 | | Nut & Lockwasher, 1/4-28 (Use as required) |
| | 31400 | | Fuel Line (Metal 3-3/8") |
| | 29774 | | Fuel Line(Braided 8-1/4")(21 cm)(Use as req.) |
| | 34357 | | Fuel Line (Epichlorohydrin 6-3/4") (1 7 cm) |
| | 30705 | | Fuel Line (Braided 16")(40 cm)(Use as req.) |
| | 29774 | | Connector, Fuel line (Braided 8-1/4") (21cm) |
| | 26460 | | Fuel Line Clamp (Use as required) |
| | 32671 | | Fuel Tank (Incl. 292 & 301) |
| 301 | 410144B | | Fuel Cap (Std.) (Use as required) |
| 301 | 33032 | | Fuel Cap (Use as required) |
| | 34210 | | Fuel Cap (use as required) |
| | 27625 | | Plug, Oil filler (Incl. 312) |
| | | | · |

| Ref # | Part Number | Qty | Description |
|-------|-------------|-----|---|
| 312 | 29673 | Ť | * Gasket, Oil filler |
| 325A | 27275 | | Clip, Hi-tension wire (Use as require d) |
| 370A | 550223 | | Name & Instruction Decal |
| 370 | 34346 | | Decal, Instruction |
| 370C | 35344 | | Decal, Speed control |
| 375 | 610755 | | Magneto (W/Ring Gear) NOTE: This magneto is not available as an assembly. The magneto number is shown for reference purposes only. Order component parts individually, as shown in parts breakdown. Refer to Division 5, Section B, page24 or Fiche 6, Grid F-11 for breakdown) |
| 377 | 30547A | | Contact Assy., Breaker |
| 378 | 30548B | | Condenser |
| 379 | 631021 | | Inlet Needle, Seat & Clip Assy. |
| 380 | 631452 | | Carburetor (Incl. 184) Refer to Division 5, SectionA, page 100 or Fiche 6, Grid D-13 for breakdown) |
| 390 | 590420A | | Rewind Starter NOTE: Replacement hardware may differ when servicing starter assy. or blower housing. Refer to Service Bulletin 508. (Refer to Division 5, Section C, page 25 or Fiche 6, Grid G-3 for breakdown) |
| | 33238D | | * Gasket Set (Incl. items marked *) |
| 420 | 730225 | | SAE 30 4-Cycle Engine Oil (Quart) |

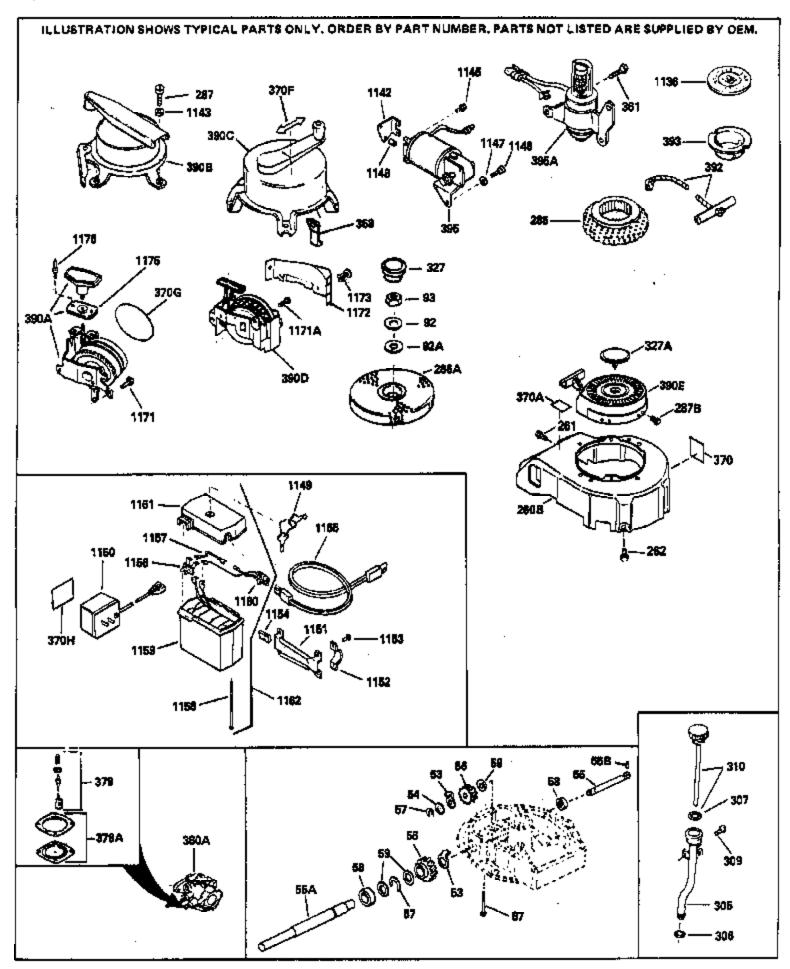

| Ref # | Part Number | Qty | Description |
|-------|-------------|-----|---|
| 19 | 31386 | | Spring, Governor |
| 32 | 32323 | | Washer, Thrust |
| 92 | 650815 | | Washer, Belleville |
| 93 | 650607 | | Nut, Flywheel |
| 182 | 6201 | | Screw, 1/4-28 x 7/8" |
| 261 | 650561 | | Screw, 1/4 20 x 5/8" |
| 262 | 650561 | | Screw, 1/4-20 x 5/8" |
| 287 | 29716 | | Screw, 1/4-28 x 7/16" (Use as require d) |
| 287 | 30513 | | Screw & Lockwasher, 1/4-28 x 1/2" |
| 287 | | | Pop Rivet (Purchase locally) (3/16" d ia.) |
| 306 | 34282 | | "O" Ring (This "O" ring is required with metal fill tube only |
| | | | when replacement mounting flange with .777 dia. oil fill hole |
| | | | has been used.) |
| 37∩∆ | 550223 | | Name & Instruction Decal |
| | 34346 | | Decal, Instruction |
| | 631021 | | Inlet Needle, Seat & Clip Assy. |
| | 590441 | | Bracket Ass'y. (Use as required) |
| | 650639 | | Open End Rivet (Use as required) |
| 1170 | 00000 | | Open End (1900 do required) |

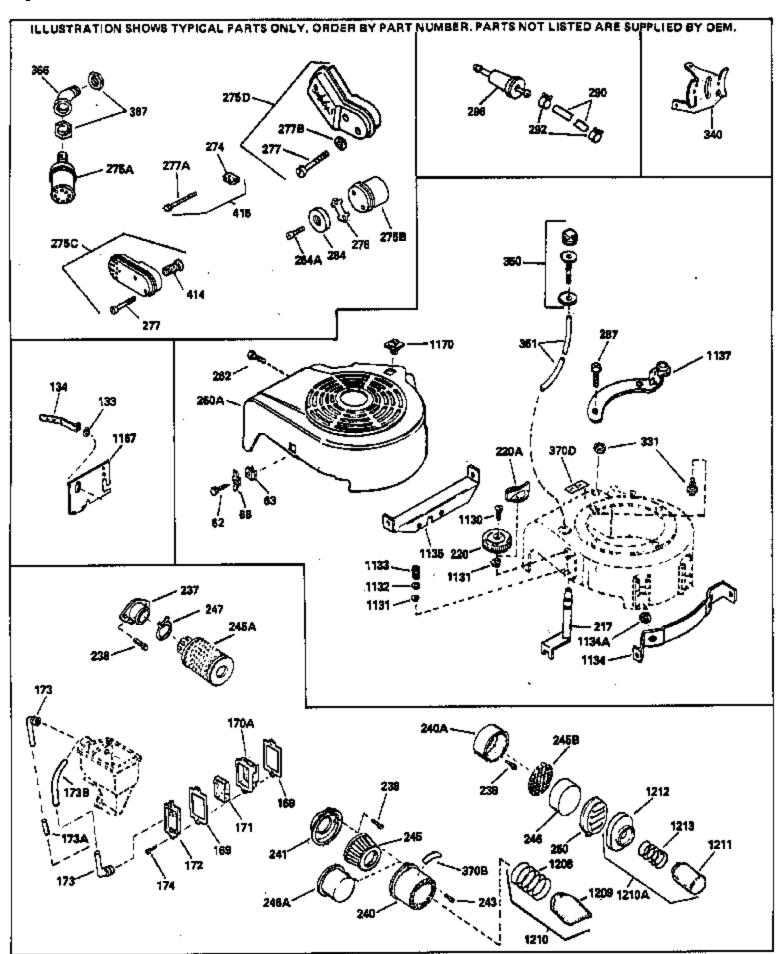

| Ref # | Part Number | Qty | Description |
|-------|-------------|-----|--|
| 19 | 31386 | | Spring, Governor |
| 32 | 32323 | | Washer, Thrust |
| 169 | 31619A | | * Gasket, Valve spring cover |
| 171 | 31410 | | Element, Breather |
| 174 | 650128 | | Screw, 10-24 x 1/2" |
| 182 | 6201 | | Screw, 1/4-28 x 7/8" |
| 238 | 28820 | | Screw, 10-32 x 1/2" |
| 240 | 31715 | | Body, Air cleaner |
| 241 | 31691 | | Bracket, Air cleaner |
| 243 | 650152 | | Screw, 8-32 x 3/8" |
| 245 | 30727 | | Air Cleaner Filter |
| 262 | 650561 | | Screw, 1/4-20 x 5/8" |
| 274 | 26754A | | * Gasket, Exhaust |
| 277 | 30063 | | Screw, Torx T-30, 1/4-20 x 1/2" (Use as req.) |
| 277A | 650774 | | Screw, 1/4-20 x 2-3/8" |
| 287 | 29716 | | Screw, 1/4-28 x 7/16" (Use as require d) |
| 287 | 30513 | | Screw & Lockwasher, 1/4-28 x 1/2" |
| 287 | | | Pop Rivet (Purchase locally) (3/16" d ia.) |
| 290 | 29774 | | Fuel Line(Braided 8-1/4")(21 cm)(Use as req.) |
| 290 | 34357 | | Fuel Line (Epichlorohydrin 6-3/4") (1 7 cm) |
| 290 | 30705 | | Fuel Line (Braided 16")(40 cm)(Use as req.) |
| 292 | 26460 | | Fuel Line Clamp (Use as required) |
| 370B | 31752 | | Decal, Air cleaner |
| 415 | 730162 | | Muffler Adapter Kit (Incl. 274 & 277A) (Inverted Ports) |
| | | | |