


| Ref # | Part Number | Qty Description |
|-------|-------------|---|
| 1 | 33729A | Cylinder (Incl. 2 & 20) (2-13/16" Bor e) |
| | 26727 | Pin, Dowel |
| | 33734 | Element, Breather |
| | 34214A | Breather Ass'y. (Incl. 6, 8, 9 & 12) |
| | | |
| | 33735 | * Gasket, Breather |
| | 30200 | Screw, 10-24 x 9/16" |
| | 33886 | Tube, Breather |
| 14 | 28277 | Washer, Flat |
| 15 | 30589 | Rod, Governor (Incl. 14) |
| | 32651 | Lever, Governor |
| | 31335 | Clamp, Governor (Clamp is positioned towardsspark plug end |
| •• | 0.000 | on 1977-78 and latermodels. It is positioned opposite spark |
| | | plugend on earlier models.) |
| | | plugeriu on eanier models.) |
| 18 | 650548 | Screw, 8-32 x 5/16" |
| | 31386 | Spring, Governor |
| | 32600 | Seal, Oil |
| | 33730A | |
| | | Crankshaft Ass'y. |
| 32 | 32323 | Washer, Thrust NOTE: This thrust washer maynot be |
| | | required if a new crankshafthas been installed. Check the |
| | | proper Mechanic's Handbook for acceptable end play. Use |
| | | this .010" thrust washer if excess end play is measured. |
| 40 | 34535 | Piston, Pin & Ring Set (Std.) (2-13/1 6") |
| | 34536 | Piston, Pin & Ring Set (3.010" OS) |
| | | |
| | 34537 | Piston, Pin & Ring Set (.020" OS) |
| | 33562B | Piston & Pin Ass'y.(Std)(Incl. 43)(2- 13/16") |
| | 33563B | Piston & Pin Ass'y. (.010" OS) (Incl. 43) |
| | 33564B | Piston & Pin Ass'y. (.020" OS) (Incl. 43) |
| 42 | 33567 | Ring Set (Std.) (2-13/16" Bore) |
| 42 | 33568 | Ring Set (.010" OS) |
| 42 | 33569 | Ring Set (.020" OS) |
| | 20381 | Ring, Piston pin retaining |
| | 32875 | Rod Assy., Connecting (Incl. 18) |
| | 32610 | Bolt, Connecting rod (Early Productio n) |
| | 32610A | |
| | | Bolt, Connecting rod |
| | 32609 | Plate, Lock (Do not use with No. 32610A locking type bolt.) |
| | 27241 | Lifter, Valve |
| | 33154 | Camshaft |
| 52 | 29914 | Pump Assy., Oil |
| 69 | 35261 | * Gasket, Mounting flange |
| 70 | 32696B | Flange Ass'y. (Incl. 72, 72A, 75, 80, 306) |
| | 9556 | Plug, Pipe |
| | 30572 | Plug, Oil drain (Incl. 73) |
| | 28833 | * Drain Plug Gasket(Not used w/ plastic plug) |
| | 27897 | Seal, Oil |
| | | |
| | 30574 | Shaft, Mechanical governor |
| | 30590A | Washer, Flat |
| | 30591 | Gear Assy., Governor (Incl. 81) |
| | 30588A | Spool, Governor |
| 84 | 29193 | Ring, Retaining |
| 86 | 650488 | Screw, 1/4-20 x 1-1/4" |
| | 610951 | Key, Flywheel |
| | 650815 | Washer, Belleville |
| | 650607 | Nut, Flywheel |
| | | |
| | 650489 | Screw, 1/4-20 x 5/8" |
| | 35232 | Wire, Ground |
| | 33554A | * Gasket, Cylinder head |
| 120 | 33016A | Head, Cylinder (Incl. 131) |
| | | |

| Ref # | Part Number | Qty | Description |
|---|--|-----|---|
| 305 306 | 33032 33784 30139 34282 | | Cap, Fuel (Use as required) Tube Assy., Oil filler (Metal) "O" Ring "O" Ring (This "O" ring is required with metal fill tube only when replacement mounting flange with .777 dia. oil fill hole has been used.) |
| 309 310 325 325 370B 370 | 29985 650562 33760 27275 33685 31752 34346 610862 | | "O" Ring Screw, 10-32 x 1/2" Dipstick, Oil (Incl. 307) (Screw In) Clip, Wire retaining Clip, Wire retaining (Early Productio n) Decal, Air cleaner Decal, Instruction Magneto NOTE: The complete magneto is not available as an assembly. The magneto number is shown for reference purposes only. Order component parts individually, as shown in parts list. (Refer to Division 5, Section B, page 30 or Fiche 6 Grid F-12 for breakdown) |
| 378 379 | 30547A 30548B 631021 631716 | | Contact Assy., Breaker Condenser Inlet Needle, Seat & Clip Assy. Carburetor (Incl. 184) (Refer to Division 5, Section A, page 122 or Fiche 6 Grid E-7 for breakdown) |
| 390 | 590420 | | Starter, Rewind NOTE: Replacement hardware may differ when servicing starter assy. or blower housing. Refer to Service Bulletin 508. (Refer to Division 5, Section C, page 25 or Fiche 6, Grid G-3 for breakdown) |
| | 33740D 730225 | | * Gasket Set (Incl. items marked *) SAE 30, 4-Cycle Engine Oil (Quart) |

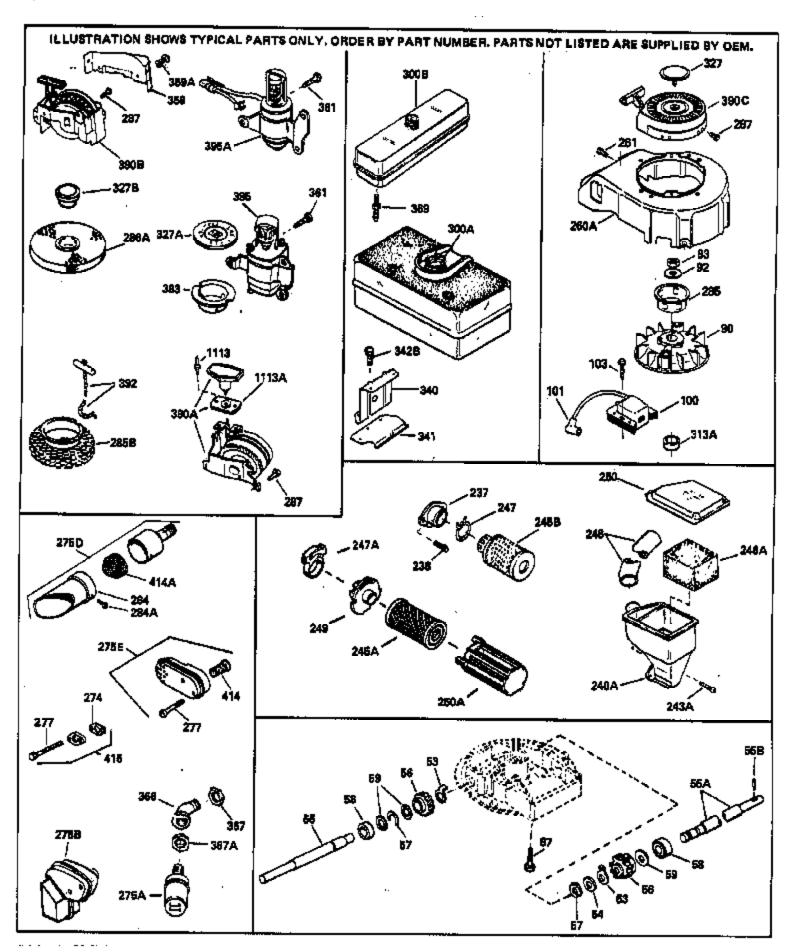

| | | tty Description |
|------|--------|--|
| 92 | 650815 | Washer, Belleville |
| 93 | 650607 | Nut, Flywheel |
| 101 | 610118 | Cover, Spark plug |
| 238 | 28820 | Screw, 10-32 x 1/2" |
| 261 | 650561 | Screw, 1/4-20 x 5/8" |
| 274 | 26754A | * Gasket, Exhaust (Use as required) |
| 274 | 33670A | * Gasket, Exhaust |
| 275D | 391026 | Muffler (Incl. 284, 284A & 414A) (This spark arrester |
| | | mufflercan be used on any model with a 3/4-14 tapped |
| | | exhaust port.) |
| 077 | 00000 | • • |
| | 30063 | Screw, 1/4-20 x 1/2" (Use as required) |
| | 650774 | Screw, 1/4-20 x 2-3/8" |
| | 650578 | Screw, 8-18 x 3/8" (Use as required) |
| | 33700 | Cover & Tube, Muffler (Use as require d) |
| 285 | 33667 | Cup, Starter |
| 287 | | Pop Rivet(Purchase locally)(Use as re quired) |
| 414A | 33323 | Screen, Muffler (Use as required) |
| 415 | 730162 | Muffler Adapter Kit (Incl. 121 & 128) (Conventional Ports) |
| 415 | 730165 | Muffler Adapter Kit (Incl. 274 & 277) NOTE: This muffler |
| | | adapter can be used only on models which haveexhaust port |
| | | on top (above intake). (Inverted Ports) |
| 4440 | | |
| 1113 | | Rivet, Open end (Can be purchased loc ally) |