


| Ref # | Part Number | Qty Description |
|-------|-------------|---|
| | 33729A | Cylinder (Incl. 2 & 20) (2-13/16" Bor e) |
| | 26727 | Pin, Dowel |
| | 33734 | Element, Breather |
| | | |
| | 34214A | Breather Ass'y. (Incl. 6, 8, 9 & 12) |
| | 33735 | * Gasket, Breather |
| | 30200 | Screw, 10-24 x 9/16" |
| 12 | 33886 | Tube, Breather |
| 14 | 28277 | Washer, Flat |
| | 30589 | Rod, Governor (Incl. 14) |
| | 32651 | Lever, Governor |
| | 31335 | Clamp, Governor (Clamp is positioned towardsspark plug end |
| 17 | 31333 | |
| | | on 1977-78 and latermodels. It is positioned opposite spark |
| | | plugend on earlier models.) |
| 18 | 650548 | Screw, 8-32 x 5/16" |
| | 31386 | Spring, Governor |
| | | 1 0 |
| | 32600 | Seal, Oil |
| | 33938 | Crankshaft Ass'y. |
| 32 | 32323 | Washer, Thrust NOTE: This thrust washer maynot be |
| | | required if a new crankshafthas been installed. Check the |
| | | proper Mechanic's Handbook for acceptable end play. Use |
| | | this .010" thrust washer if excess end play is measured. |
| 40 | 34535 | |
| | | Piston, Pin & Ring Set (Std.) (2-13/1 6") |
| | 34536 | Piston, Pin & Ring Set (.010" OS) |
| | 34537 | Piston, Pin & Ring Set (.020" OS) |
| | 33562B | Piston & Pin Ass'y.(Std)(Incl. 43)(2- 13/16") |
| 41 | 33563B | Piston & Pin Ass'y. (.010" OS) (Incl. 43) |
| 41 | 33564B | Piston & Pin Ass'y. (.020" OS) (Incl. 43) |
| 42 | 33567 | Ring Set (Std.) (2-13/16" Bore) |
| | 33568 | Ring Set (.010" OS) |
| | 33569 | Ring Set (.020" OS) |
| | 20381 | Ring, Piston pin retaining |
| | | |
| | 32875 | Rod Assy., Connecting (Incl. 18) |
| | 32610 | Bolt, Connecting rod (Early Productio n) |
| | 32610A | Bolt, Connecting rod |
| 46A | 32609 | Plate, Lock (Do not use with No. 32610A locking type bolt.) |
| 48 | 27241 | Lifter, Valve |
| 50 | 33154 | Camshaft |
| | 29914 | Pump Assy., Oil |
| | 35261 | * Gasket, Mounting flange |
| | 32696B | Flange Ass'y. (Incl. 72, 72A, 75, 80, 306) |
| | 30572 | Plug, Oil drain (Incl. 73) |
| | | |
| | 9556 | Plug, Pipe |
| | 28833 | * Drain Plug Gasket(Not used w/ plastic plug) |
| | 27897 | Seal, Oil |
| | 30574 | Shaft, Mechanical governor |
| 81 | 30590A | Washer, Flat |
| 82 | 30591 | Gear Assy., Governor (Incl. 81) |
| | 30588A | Spool, Governor |
| | 29193 | Ring, Retaining |
| | 650488 | Screw, 1/4-20 x 1-1/4" |
| | | |
| | 610951 | Key, Flywheel |
| | 650815 | Washer, Belleville |
| | 650607 | Nut, Flywheel |
| 101A | 27276 | Cover, Spark plug |
| | 650489 | Screw, 1/4-20 x 5/8" |
| | 35232 | Wire, Ground |
| | 33554A | * Gasket, Cylinder head |
| 119 | | Jasket, Cyllinder Head |

| | Deat Marchan | Ot. Benefities |
|-----|--------------------|---|
| | Part Number | Qty Description |
| | 33016A | Head, Cylinder (Incl. 131) |
| | 32644A | Intake Valve (Std.) (Incl. 151) (Inverted Ports) |
| | 32645A | Intake Valve (1/32" OS) (Incl. 151) (Inverted Ports) |
| | 29313C | Exhaust Valve (Std.) (Incl. 151) (Inverted Ports) |
| | 29315C | Exhaust Valve (1/32" OS) (Incl. 151) (Inverted Ports) |
| | 26073 | Washer, Flat (Not used on late produc tion) |
| | 650691 | Washer, Flat (Use as required) |
| | 650818 | Screw, 5/16-18 x 1-1/2" (Use as requi red) |
| | 6021A | Screw, 5/16-18 x 1-1/2" (Use as requi red) |
| | 650694A | Screw, 5/16-18 x 2" (Use as required) |
| | 33636 | Plug, Spark (J-8C) |
| | 33678 | Cap, Upper valve spring (Exhaust) |
| | 31671 | Upper Cap (Int. & Ex.)(Early Producti on) |
| | 31672 31673 | Spring, Valve |
| | 32924 | Cap, Lower valve spring |
| | | Spring, Compression Screw, 10-32 x 1" |
| | 650688 27234A | , |
| | 32755 | * Gasket, Valve spring cover |
| | 650128 | Cover, Valve spring box Screw, 10-24 x 1/2" |
| | 29752 | Nut & Lockwasher Assy. |
| | 6201 | Screw, 1/4-28 x 7/8" |
| | 33739 | Pipe, Intake |
| | 33151 | Link, Governor spring |
| | 33155A | Control Assy., Speed (Incl. 206) |
| | 33150 | Bracket, Control |
| | 610973 | Terminal Assy. (Use as required) |
| | 33133 | Link, Throttle |
| | 34336 | Link, Throttle |
| | 30200 | Screw, 10-24 x 9/16" |
| | 27793 | Clip, Conduit |
| | 28942 | Screw, 10-32 x 3/8" |
| | 650142 | Screw, 1/4-20 x 1-1/8" |
| | 33751A | * Gasket, Intake |
| | 28820 | Screw, 10-32 x 1/2" |
| | 27272A | * Gasket, Air cleaner |
| | 31715 | Body, Air cleaner |
| | 31691 | Bracket, Air cleaner |
| | 650152 | Screw, 8-32 x 3/8" |
| | 730164 | Cleaner Kit (Incl. 238 thru 245 & 370 B) (Use as required) |
| | 30727 | Element, Air cleaner |
| | 33738D | Housing, Blower NOTE: Replacement hardware may differ |
| | | when servicing starter assy. or blower housing. Refer to |
| | | Service Bulletin 508. |
| 004 | CEOECA | Coron, 4/4 20 v. F/0!! |
| | 650561 | Screw, 1/4-20 x 5/8" * Cooket Exhaust (Lian on required) |
| | 26754A | * Gasket, Exhaust (Use as required) |
| | 33670A | * Gasket, Exhaust Muffler |
| | 34121 650774 | |
| | 650774 | Screw, 1/4-20 x 2-3/8" Screw, 1/4-20 x 1/3" (Lice as required.) |
| | 30063 | Screw, 1/4-20 x 1/2" (Use as required) |
| | 33667 33668 | Cup, Starter |
| | 33668 | Screen, Starter cup |
| | 29752 20774 | Nut & Lockwasher 1/4-28 (Use as requi red) |
| | 29774 | Fuel Line (Braided 8-1/4") (21 cm) |
| | 30705 33754 | Fuel Line (Braided 16") (40 cm) |
| | 33754 26460 | Line, Fuel (Metal 3.360") |
| 292 | 20 1 00 | Clamp, Fuel line |
| | | |

| Ref # | Part Number | Qty | Description |
|---|--|-----|---|
| 300 301 301 305 306 | 32671 410144B 33032 33784 30139 34282 | ., | Tank Assy., Fuel (Incl. 292 & 301) Cap, Fuel (Standard) (Use as required) Cap, Fuel (Use as required) Tube Assy., Oil filler (Metal) "O" Ring "O" Ring (This "O" ring is required with metal fill tube only when replacement mounting flange with .777 dia. oil fill hole has been used.) |
| 309 310 325 325 370 370B | 29985 650562 33760 27275 33685 31353 31752 610862 | | "O" Ring Screw, 10-32 x 1/2" Dipstick, Oil (Incl. 307) (Screw In) Clip, Wire retaining Clip, Wire retaining (Early Productio n) Decal, Instruction Decal, Air cleaner Magneto NOTE: The complete magneto is not available as an assembly. The magneto number is shown for reference purposes only. Order component parts individually, as shown in parts list. (Refer to Division 5, Section B, page 30 or Fiche 6 Grid F-12 for breakdown) |
| 378 379 | 30547A 30548B 631021 631716 | | Contact Assy., Breaker Condenser Inlet Needle, Seat & Clip Assy. Carburetor (Incl. 184) (Refer to Division 5, Section A, page 122 or Fiche 6 Grid E-7 for breakdown) |
| 390 | 590420 | | Starter, Rewind NOTE: Replacement hardware may differ when servicing starter assy. or blower housing. Refer to Service Bulletin 508. (Refer to Division 5, Section C, page 25 or Fiche 6, Grid G-3 for breakdown) |
| | 33740D 730225 | | * Gasket Set (Incl. items marked *) SAE 30, 4-Cycle Engine Oil (Quart) |

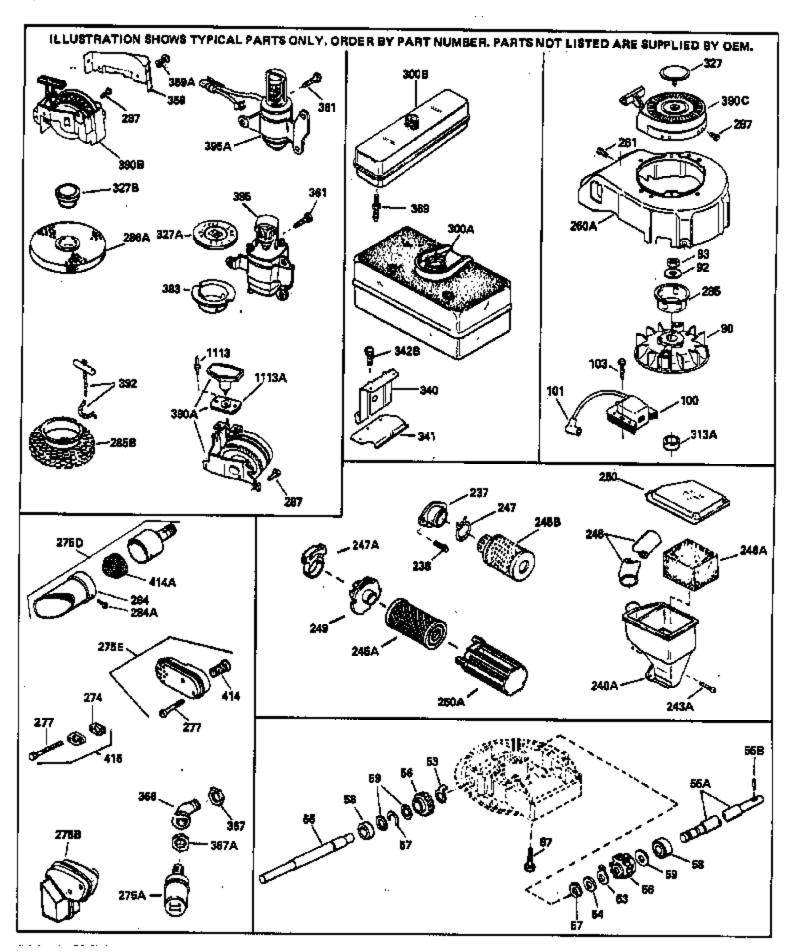

| Ref # | Part Number | Qty Description |
|-------|-------------|---|
| 92 | 650815 | Washer, Belleville |
| 93 | 650607 | Nut, Flywheel |
| 238 | 28820 | Screw, 10-32 x 1/2" |
| 261 | 650561 | Screw, 1/4-20 x 5/8" |
| 274 | 26754A | * Gasket, Exhaust (Use as required) |
| 274 | 33670A | * Gasket, Exhaust |
| 275D | 391026 | Muffler (Incl. 284, 284A & 414A) (This spark arrester mufflercan be used on any model with a 3/4-14 tapped exhaust port.) |
| 277 | 650774 | Screw, 1/4-20 x 2-3/8" |
| 277 | 30063 | Screw, 1/4-20 x 1/2" (Use as required) |
| 284A | 650578 | Screw, 8-18 x 3/8" (Use as required) |
| 284 | 33700 | Cover & Tube, Muffler (Use as require d) |
| 285 | 33667 | Cup, Starter |
| 287 | | Pop Rivet(Purchase locally)(Use as re quired) |
| 414A | 33323 | Screen, Muffler (Use as required) |
| 415 | 730162 | Muffler Adapter Kit (Incl. 121 & 128) (Conventional Ports) |
| 415 | 730165 | Muffler Adapter Kit (Incl. 274 & 277) NOTE: This muffler adapter can be used only on models which have exhaust port on top (above intake). (Inverted Ports) |
| 1113 | | Rivet, Open end (Can be purchased loc ally) |