


| Ref # | Part Number Q | ty Description |
|-------|---------------|---|
| 1 | 33729A | Cylinder (Incl. 2 & 20) (2-13/16" Bor e) |
| 2 | 26727 | Pin, Dowel |
| | 33734 | Element, Breather |
| | 34214A | Breather Ass'y. (Incl. 6, 8, 9 & 12) |
| | 33735 | * Gasket, Breather |
| | | |
| | 30200 | Screw, 10-24 x 9/16" |
| | 33886 | Tube, Breather |
| | 28277 | Washer, Flat |
| 15 | 30589 | Rod, Governor (Incl. 14) |
| 16 | 32651 | Lever, Governor |
| 17 | 31335 | Clamp, Governor (Clamp is positioned towardsspark plug end |
| | | on 1977-78 and latermodels. It is positioned opposite spark |
| | | plugend on earlier models.) |
| | | plagoria orr camor modelo. |
| 18 | 650548 | Screw, 8-32 x 5/16" |
| 19 | 31386 | Spring, Governor |
| | 32600 | Seal, Oil |
| | 33838 | Crankshaft Ass'y. |
| | 32323 | Washer, Thrust NOTE: This thrust washer maynot be |
| 32 | 32323 | |
| | | required if a new crankshafthas been installed. Check the |
| | | proper Mechanic's Handbook for acceptable end play. Use |
| | | this .010" thrust washer if excess end play is measured. |
| 40 | 34535 | Piston, Pin & Ring Set (Std.) (2-13/1 6") |
| | 34536 | Piston, Pin & Ring Set (.010" OS) |
| | 34537 | |
| | | Piston, Pin & Ring Set (.020" OS) |
| | 33562B | Piston & Pin Ass'y.(Std)(Incl. 43)(2- 13/16") |
| | 33563B | Piston & Pin Ass'y. (.010" OS) (Incl. 43) |
| | 33564B | Piston & Pin Ass'y. (.020" OS) (Incl. 43) |
| | 33567 | Ring Set (Std.) (2-13/16" Bore) |
| 42 | 33568 | Ring Set (.010" OS) |
| 42 | 33569 | Ring Set (.020" OS) |
| 43 | 20381 | Ring, Piston pin retaining |
| | 32875 | Rod Assy., Connecting (Incl. 18) |
| | 32609 | Plate, Lock (Do not use with No. 32610A locking type bolt.) |
| | 32610 | Bolt, Connecting rod (Early Production) |
| | 32610A | Bolt, Connecting rod |
| | 27241 | |
| | | Lifter, Valve |
| | 33154 | Camshaft |
| | 29914 | Pump Assy., Oil |
| | 35261 | * Gasket, Mounting flange |
| | 32612A | Flange Ass'y. (Incl. 72, 75 & 80) |
| | 30572 | Plug, Oil drain (Incl. 73) |
| 72A | 9556 | Plug, Pipe |
| 73 | 28833 | * Drain Plug Gasket(Not used w/ plastic plug) |
| 75 | 27897 | Seal, Oil |
| | 30574 | Shaft, Mechanical governor |
| | 30590A | Washer, Flat |
| | 30591 | Gear Assy., Governor (Incl. 81) |
| | | • , , |
| | 30588A | Spool, Governor |
| | 29193 | Ring, Retaining |
| | 650488 | Screw, 1/4-20 x 1-1/4" |
| | 610951 | Key, Flywheel |
| 92 | 650815 | Washer, Belleville |
| 93 | 650607 | Nut, Flywheel |
| | 27276 | Cover, Spark plug |
| | 650489 | Screw, 1/4-20 x 5/8" |
| | 34231 | Wire, Ground |
| | | · |
| 119 | 33554A | * Gasket, Cylinder head |

| Dof # Dort No. | ımbor 🗠 🗀 | Description |
|--------------------------|-----------|--|
| Ref # Part Nu | | |
| 120 33016A | | Head, Cylinder (Incl. 131) |
| 125 32644A | | Intake Valve (Std.) (Incl. 151) (Inverted Ports) |
| 125 32645A | | Intake Valve (1/32" OS) (Incl. 151) (Inverted Ports) |
| 126 29313C | | Exhaust Valve (Std.) (Incl. 151) (Inverted Ports) |
| 126 29315C | | Exhaust Valve (1/32" OS) (Incl. 151) (Inverted Ports) |
| 127 26073 | | Washer, Flat (Not used on late production) |
| 127 650691 | | Washer, Flat (Use as required) |
| 130 650818 | 3 | Screw, 5/16-18 x 1-1/2" (Use as requi red) |
| 130 6021A | | Screw, 5/16-18 x 1-1/2" (Use as requi red) |
| 131 650694 | łA | Screw, 5/16-18 x 2" (Use as required) |
| 135 33636 | | Plug, Spark (J-8C) |
| 149A 33678 | | Cap, Upper valve spring (Exhaust) |
| 149 31671 | | Upper Cap (Int. & Ex.)(Early Producti on) |
| 150 31672 | | Spring, Valve |
| 151 31673 | | Cap, Lower valve spring |
| 169 27234A | 1 | * Gasket, Valve spring cover |
| 170 32755 | • | Cover, Valve spring box |
| 170 32733 174 650128 | | |
| |) | Screw, 10-24 x 1/2" |
| 178 29752 | | Nut & Lockwasher Assy. |
| 179 30593 | | Clip, Magneto wire |
| 182 30088A | 4 | Screw, 1/4-28 x 1" |
| 184 26756 | | * Gasket, Carburetor |
| 185 33739 | | Pipe, Intake |
| 186 32653 | | Link, Governor spring |
| 200 32181A | 4 | Speed Control (Incl. 203, 204 & 206) |
| 203 31342 | | Spring, Compression |
| 204 650549 | | Screw, 5-40 x 7/16" |
| 206 610973 | 3 | Terminal Assy. (Use as required) |
| 207 33133 | | Link, Throttle |
| 209 30200 | | Screw, 10-24 x 9/16" |
| 210 27793 | | Clip, Conduit |
| 211 28942 | | Screw, 10-32 x 3/8" |
| 223 650142 |) | Screw, 1/4-20 x 1-1/8" |
| 224 33751A | | * Gasket, Intake |
| 238 28820 | • | Screw, 10-32 x 1/2" |
| 239 27272A | 1 | * Gasket, Air cleaner |
| 240 31715 | ` | Body, Air cleaner |
| | | |
| 241 31691 | | Bracket, Air cleaner |
| 243 650152 | | Screw, 8-32 x 3/8" |
| 244 730164 | ŀ | Cleaner Kit (Incl. 238 thru 245 & 370 B) (Use as required) |
| 246 31700 | | Element, Air cleaner |
| 260 33738D |) | Housing, Blower NOTE: Replacement hardware may differ |
| | | when servicing starter assy. or blower housing. Refer to |
| | | Service Bulletin 508. |
| 261 650561 | | Screw, 1/4-20 x 5/8" |
| 274 26754A | | * Gasket, Exhaust (Use as required) |
| 274 20754A 274 33670A | | * Gasket, Exhaust |
| | 1 | · |
| 275 35771 | 1 | Muffler (Incl. 274) |
| 277 650774 | ŀ | Screw, 1/4-20 x 2-3/8" |
| 277 30063 | | Screw, 1/4-20 x 1/2" (Use as required) |
| 285 33667 | | Cup, Starter |
| 286 33668 | | Screen, Starter cup |
| 287B 29752 | | Nut & Lockwasher 1/4-28 (Use as requi red) |
| 290 29774 | | Fuel Line (Braided 8-1/4") (21 cm) |
| 290 30705 | | Fuel Line (Braided 16") (40 cm) |
| 291 33754 | | Line, Fuel (Metal 3.360") |
| 292 26460 | | Clamp, Fuel line |
| | | • |

| Ref # | Part Number | Qty Description |
|---|--|--|
| 301 301 | 32671 410144B 33032 34282 | Tank Assy., Fuel (Incl. 292 & 301) Cap, Fuel (Standard) (Use as required) Cap, Fuel (Use as required) "O" Ring (This "O" ring is required with metal fill tube only when replacement mounting flange with .777 dia. oil fill hole has been used.) |
| 312 313 325 325 370 370C | 27625 29673 33876 27275 33685 34346 35344 610942A | Plug, Oil filler (Incl. 312) * Gasket, Filler plug Gasket, Stator Clip, Wire retaining Clip, Wire retaining (Early Productio n) Decal, Instruction Decal, Speed control Magneto NOTE: The complete magneto is not available as an assembly. The magneto number is shown for reference purposes only. Order component parts individually, as shown in parts list. (Refer to Division 5, Section B, page 35 or Fiche 6 Grid F-13 for breakdown) |
| 378 379 | 30547A 30548B 631021 631716 | Contact Assy., Breaker Condenser Inlet Needle, Seat & Clip Assy. Carburetor (Incl. 184) (Refer to Division 5, Section A, page 122 or Fiche 6 Grid E-7 for breakdown) |
| 390 | 590420 | Starter, Rewind NOTE: Replacement hardware may differ when servicing starter assy. or blower housing. Refer to Service Bulletin 508. (Refer to Division 5, Section C, page 25 or Fiche 6, Grid G-3 for breakdown) |
| | 33740D 730225 | * Gasket Set (Incl. items marked *) SAE 30, 4-Cycle Engine Oil (Quart) |

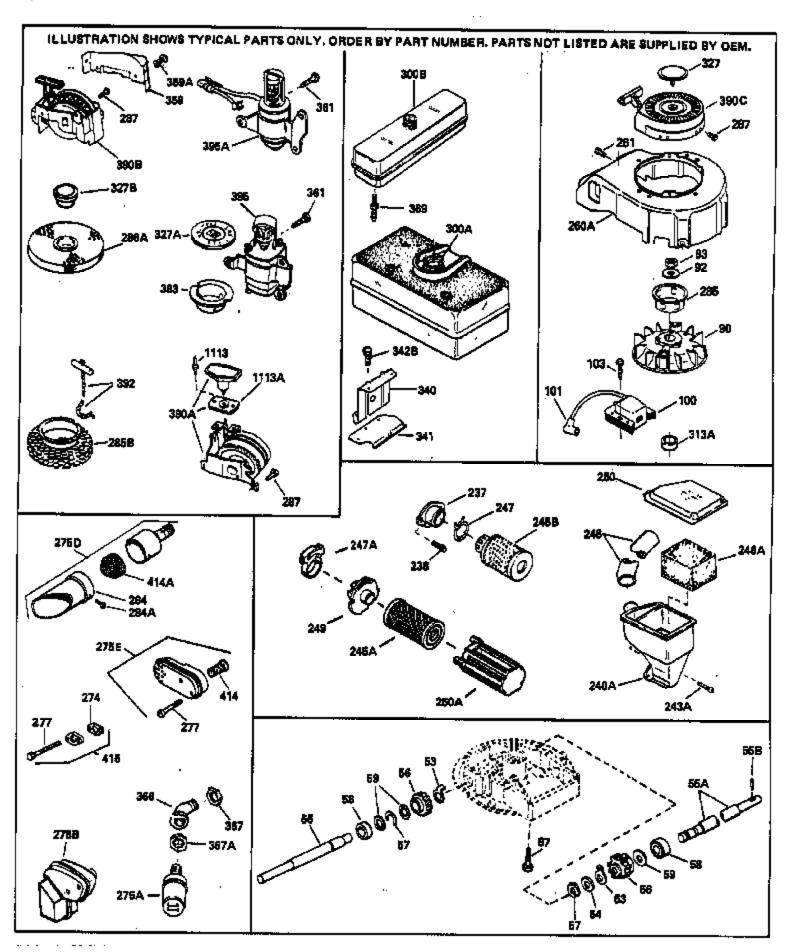

| Ref # | Part Number | Qty | Description |
|-------|-------------|-----|---|
| 92 | 650815 | - | Washer, Belleville |
| 93 | 650607 | | Nut, Flywheel |
| 238 | 28820 | | Screw, 10-32 x 1/2" |
| 261 | 650561 | | Screw, 1/4-20 x 5/8" |
| 274 | 26754A | | * Gasket, Exhaust (Use as required) |
| 274 | 33670A | | * Gasket, Exhaust |
| 275D | 391026 | | Muffler (Incl. 284, 284A & 414A) (This spark arrester mufflercan be used on any model with a 3/4-14 tapped exhaust port.) |
| 277 | 650774 | | Screw, 1/4-20 x 2-3/8" |
| 277 | 30063 | | Screw, 1/4-20 x 1/2" (Use as required) |
| 284A | 650578 | | Screw, 8-18 x 3/8" (Use as required) |
| 284 | 33700 | | Cover & Tube, Muffler (Use as require d) |
| 285 | 33667 | | Cup, Starter |
| 287 | | | Pop Rivet(Purchase locally)(Use as re quired) |
| 414A | 33323 | | Screen, Muffler (Use as required) |
| 415 | 730162 | | Muffler Adapter Kit (Incl. 121 & 128) (Conventional Ports) |
| 415 | 730165 | | Muffler Adapter Kit (Incl. 274 & 277) NOTE: This muffler adapter can be used only on models which have exhaust port on top (above intake). (Inverted Ports) |
| 1113 | | | Rivet, Open end (Can be purchased loc ally) |