Service Kit 753-0827

CODE: PM-273

DATE: January 21, 1998

SUBJ: Cord and switch replacement on electric lawnmower models numbers 407 and 707

Use Service Kit number 753-0827 when replacing cord and switch assembly part number 625-0018A or 925-0018B. This kit included the updated cord and switch assembly for the current electric lawnmowers.


INSTALLATION INSTRUCTIONS

- 1. Unplug the unit from the power source
- 2. Remove the motor cover screws from beneath the mower deck and remove the motor cover.
- 3. Remove the nut that secures the cord clamp to the top of the motor.
- 4. Disconnect the wire lead coming from the motor and the plug connected to the rectifier.
- 5. Remove the tie strap that secures the cord to the lower handle.
- 6. Remove the bail from the left side of the handle and the switch control box. Discard the bail. The bail is not use with the new cord and switch assembly.
- 7. Remove the two screws that secures the control box to the upper handle. Retain the two screws for reassembly of the new switch.
- 8. Install the new switch control box with the two screws removed in Step 7.Use two uppermost screw holes in upper handle.
- 9. Connect the black plug into the rectifier.
- 10. Connect the plug with the red and blue wires to the motor lead.

NOTE: The leads should be connected so that the red and blue wire are in the same position.

- 11. Secure the cord clamp to the top of the motor with the nut removed in Step 3.
- 12. Install the rubber grommet into the space provided in the back of the motor cover.
- 13. Secure the motor cover with the screws removed in Step 2.
- 14. Secure the cord to the lower handle with the new tie straps provided in the kit.
- 15. Connect unit to power source and test proper function.

Exploded view of Cord & Switch Assembly (Part No. 625-0050)

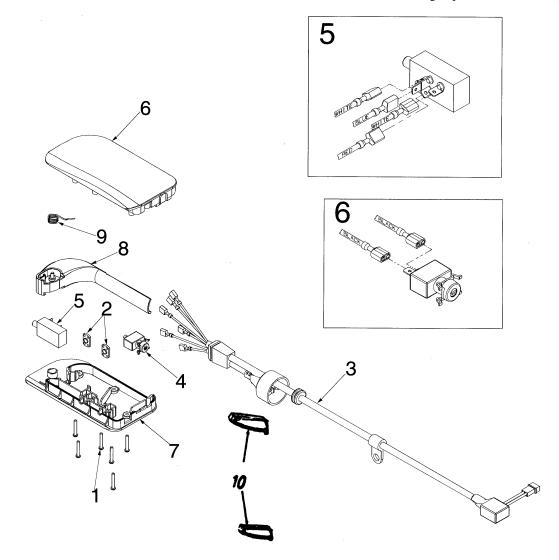

Service Kit 753-0827 Consist of:

Ref.	Part		
No.	No.	Description	Qty.
1	710-1150	Hex Lock screw #7-19 x 1.00 lg.	7
2	712-0414	Weld tab nut 1/4-20 thd.	2
3	724-0248	Cord with plug	1
4	725-1712	Circuit Breaker	1
5	725-1731	Switch	1
6	731-1985	Upper Switch Housing	1
7	731-1986	Lower Switch Housing	1
8	731-1987	Control Lever	1
9	732-0935	Torsion Spring	1
10	725-0157	Cable ties	2