

Ref #	Part Number Qt	/ Description
1	34348B	Cylinder (Incl.2,20,72,72A) (3-1/8" B ore)
	27652	Pin, Dowel
	650820	Screw, 1/4-20 x 1/2"
	30968	Nipple, Pipe
	30969	Cap, Oil drain
	650494	•
	30700	Screw, 6-40 x 5/16"
		Yoke, Governor (Incl. 45A, 8, 45B)
	30699C	Rod Assy., Governor (Incl. 15A & 15B)
	33454	Governor Lever Assy.
	29916	Clamp, Governor lever
	650548	Screw, 8-32 x 5/16"
	34663	Spring, Speed control
	32630	Seal, Oil
25	35256A	Baffle, Blower housing
26	650561	Screw, 1/4-20 x 5/8"
30	33365B	Crankshaft (Incl. 108 & 109)
35	29826	Screw, 10-32 x 3/4"
	29918	Lockwasher, #8 E.T.
	29216	Nut & Lockwasher, 10-32 "Keps"
	30322	Locknut, Hex "Keps", 8-32
	29642	Ring, Retaining
	34552	Piston, Pin & Ring Set (Std.) (3-1/8")
	34553	Piston, Pin & Ring Set (3.010" OS)
	34554	Piston, Pin & Ring Set (.020" OS)
	34329A	Piston & Pin Ass'y.(Std)(Incl.43)(3-1 /8")
	34330A	Piston & Pin Ass'y. (.010" OS)(Incl. 43)
	34331A	Piston & Pin Ass'y. (.020" OS)(Incl. 43)
	34332	Ring Set (Std.) (3-1/8" Bore)
	34333	Ring Set (.010" OS)
	34334	Ring Set (.020" OS)
	27888	Ring, Piston pin retaining
	32591C	Rod Assy., Connecting (Incl. 49)
	650662C	Bolt, Connecting rod (2 pieces)
	34034	Lifter, Valve
	34242	Dipper, Oil
50	34143	Camshaft (MCR)
60	33273A	Extension, Blower housing
61	34126	Bracket, Grommet mounting
62	650760	Screw, 8-32 x 3/8"
63	28545	Grommet, Plastic
	650128	Screw, 10-24 x 1/2"
	35262	* Gasket, Cylinder cover
	33367B	Cylinder Cover (Incl. 71, 75, 80, 311 & 312)
	33368	Bushing, Crankshaft
	27642	Plug, Oil drain
	31950	Seal, Oil
	31845	Shaft, Mechanical governor
	30590A	——————————————————————————————————————
		Washer, Flat
	30591	Gear Assy., Governor (Incl. 81)
	30588A	Spool, Governor
	29193	Ring, Retaining
	650833	Screw, 1/4-20 x 1-3/16"
	650832	Screw, 1/4-20 x 1-11/16"
	32589	Key, Flywheel
	650815	Washer, Belleville
	8116	Nut, Hex (1/2-20)
	610118	Cover, Spark plug (Use as required)
103	650489	Screw, 1/4-20 x 5/8"

	2	D 12
	.	Description
	29783	Pin, Crankshaft gear
109 3		Gear, Crankshaft
110 3		Ground Wire
	34041A	* Gasket, Head
120 3	34030A	Head, Cylinder
125 2	27878A	Exhaust Valve (Std.) (Incl. 151)
125 2	27880A	Exhaust Valve (1/32" OS) (Incl. 151)
126 3	34035	Intake Valve (Std.) (Incl. 151)
126 3	34036	Intake Valve (1/32" OS) (Incl. 151)
127A 2	26073	Washer, Flat (Use as required)
127A 6		Washer, Flat (Use as required)
	650691	Washer (Use as req., but not w/6021A screw)
	650690	Washer, Belleville
	650727	Screw, 5/16-18 x 1-3/4" (Use as requi red)
130A 6		Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse with
100/1	302.17	650691 washer)
130 6	650694A	Screw, 5/16-18 x 2" (Use as required)
131A 6	650713	Screw, 5/16-18 x 5/8" (Use as require d)
131A 7	792028	Screw, 5/16-18 x 7/8" (Use as require d)
131 6	650802	Screw, 1/4-20 x 5/8" (Use as required)
131 6	650737	Screw, 1/4-20 x 1/2" (Use as required)
131 6	650738	Screw, 1/4-20 x 5/8" (Use as required)
135 3	33636	Resistor Spark Plug (RJ17LM)
139 3		Bracket, Governor gear
	650836	Screw, 10-24 x 1/2"
149A 2		Cap, Upper valve spring
149 2		Cap, Upper valve spring
150 2		Spring, Valve
151 3		Cap, Lower valve spring
	27896A	* Gasket, Breather cover
170 2		Body, Breather
170 2		
		Element, Breather
172 2		Cover, Valve spring
173 3		Tube, Breather
	650128 050507	Screw, 10-24 x 1/2"
	650597	Screw, 10-24 x 5/8"
178 2		Nut & Lockwasher, 1/4-28
179B 3		Clip, Primer line (Use as required)
	30088A	Screw, 1/4-28 x 1"
184 3		* Gasket, Carburetor
185 3		Pipe, Intake
203 3		Spring, Compression
	650549	Screw, 5-40 x 7/16"
206 6	610973	Terminal Assy. (Use as required)
210 2	27793	Clip, Conduit
211 2	28942	Screw, 10-32 x 3/8"
223 6	650378	Screw, Torx T-30, 5/16-18 x 1-1/8 "
	27915A	* Gasket, Intake pipe
260 3		Blower Housing (For electric starter)
	650788	Screw, 5/16-18 x 3/4" (Use as require d)
	29747B	Screw, 5/16-24 x 21/32"
	33272B	Cover, Cylinder head
275C 3		Muffler (Optional quiet muffler)
	33280A	Muffler
276 3		Plate, Muffler locking
	650729 650606	Screw, 5/16-18 x 3-3/16" Screw, 5/16-18 x 3-3/16" Screw, 5/16-18 x 3-3/16"
277A 6	00000	Screw, 5/16-18x2-3/4" (Used with 276A)


D.(#	Dord N. orbora	Description
		Description
	33013	Cover, Starter bubble
	650760	Screw, 8-32 x 3/8"
	33662	Hub & Screen Assy., Starter
	29752	Nut & Lockwasher, 1/4-28
	29774	Fuel Line (Braided 8-1/4")(21 cm)(As req.)
	30705	Fuel Line (Braided 16")(41 cm)(Use as req.)
	30962	Fuel Line (Braided 32")(81 cm)(Use as req.)
292	26460	Clamp, Fuel line (Use as required)
298	650665	Screw, 1/4-15 x 7/8"
300	34156A	Fuel Tank (Incl. 292 & 301) NOTE: These tanks were
		builtwith different size fuel inlet openings. Tanks with the
		1-3/16" I.D. opening use fuel cap 34210. Tanks with the
		1-1/2" I.D. opening use fuel cap 35355.
004	4404445	
	410144B	Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
301	33032	Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16"
		I.D.)
301	34210	Fuel Cap (Red Plastic) (Spurt Resistant, High Profile)
301	01210	(1-3/16" I.D)
		(1-5/10 1.D)
301	35355	Fuel Cap (Red plastic) (1-1/2" I.D.)
305	33893A	Tube, Oil fill
306	33590	"O" Ring
310	34011A	Dipstick (Incl. 306)
325	29443	Clip, Fuel line (Use as required)
	34246	Clip, Ground wire (Use as required)
	650765	Screw, 10-32 x 1/2"
	34666	Cover, Carburetor
	28942	Screw, 10-32 x 3/8"
	34154	Plate, Fuel tank mounting
	34155	Bracket, Fuel tank mounting
	650561	Screw, 1/4-20 x 5/8"
	34141	Guard, Starter
	32576	
	33377	Seal, Snow guard
		Bracket, Carburetor cover mounting
	650767	Screw, 8-32 x 27/64"
	34414	Decal, Warning
	34589	Decal, Choke
	34346	Decal, Instruction
	34870	Decal, Instruction Can be used on HM80 with diecast starter.
	34144	Decal, Primer
	631021	Inlet Needle, Seat & Clip Assy.
380	632111	Carburetor (Incl. 184) (Refer to Division 5, Section A, page
		170 for breakdown or Fiche18A-1, Grid F-1)
300	590479	Rewind Starter (Refer to Division 5, Section C, page 30 for
330	330 1 73	breakdown or Fiche 18A-1, Grid G-5)
		bleakdowit of Fibre 10A-1, Olid O-0)
400	33279G	Gasket Set (Incl. items marked*)
408	35570	Screen Seal (Can be used on HM80 with stamped steel
		recoil starter)
400	2550	,
409	35569	Spacer (Can be used on HM80 with stamped steel recoil
		starter)
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
710	. 555. 6	used on HM80 with stamped steel recoil starter)
		,
411	35568	Debris Screen (Can be used on HM80 with stamped steel
		recoil starter)

Ref #	Part Number	Qty Description
413	650907	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
420	730225	SAE 30, 4-Cycle Engine Oil (Quart)
	730226	SAE 5W30, 4-Cycle Engine Oil (Quart)
425	730572	Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter)
429	650868	Screw, 8-18 \times 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077	Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609	Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610	Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078	A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079	D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611	Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636	Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).



62 63 68 74 97 131 131 131 174	Part Number 650760 28545 33356 31855 650802 650737 650738 650128 650597 730127	Qty	Description Screw, 8-32 x 3/8" Grommet, Plastic Terminal, Ground Retainer, Bearing Lockwasher, Heavy split, #10 (Buy loc ally) Screw, 1/4-20 x 5/8" (Use as required) Screw, 1/4-20 x 1/2" (Use as required) Screw, 1/4-20 x 5/8" (Use as required) Screw, 1/4-20 x 5/8" (Use as required) Screw, 10-24 x 1/2" Screw, 10-24 x 5/8" Air Cleaner Ass'y. (Incl.238,239,240,241,243,245 & 370) (Use as required)
227	730164		Air Cleaner Ass'y. (Incl. 238, 239, 240, 241, 243 & 245) (Use as required)
	650824 650851		Stud, 1/4-20 x 7.33 (Use as required) Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru elbow)
274	34700 35865 391026		Element, Air cleaner Gasket, Exhaust (Use as required) Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler can be used on any model.)
277 277A 292 298 369 370J	35824 650729 650696 26460 650665 35857 34870 34387		Muffler (Optional quiet muffler) Screw, 5/16-18 x 3-3/16" Screw, 5/16-18x2-3/4" (Used with 276A) Clamp, Fuel line (Use as required) Screw, 1/4-15 x 7/8" Valve, Fuel shut-off Decal, Instruction Can be used on HM80 with diecast starter. Decal, Instruction Can be used on HM80 with stamped steel recoil starter.
395	33329D		Starter Motor Kit (110-120 Volt) This 110-120 volt starter motor kit may have been added to this engine. It can be added only if cylinder hasdrilled and tapped starter mounting bosses and a ring gear flywheel. Refer to service number stamped on end cap of motor, or on decal for identification. Ref
408	35570		Screen Seal (Can be used on HM80 with stamped steel recoil starter)
409	35569		Spacer (Can be used on HM80 with stamped steel recoil starter)
410	730573		Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter)
411	35568		Debris Screen (Can be used on HM80 with stamped steel recoil starter)
413	650907		Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
	730130 730572		Exh.Adapter Kit (Incl.274,277)(Use as req.) Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter)
429	650868		Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).

Ref #	Part Number	Qty	Description
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).

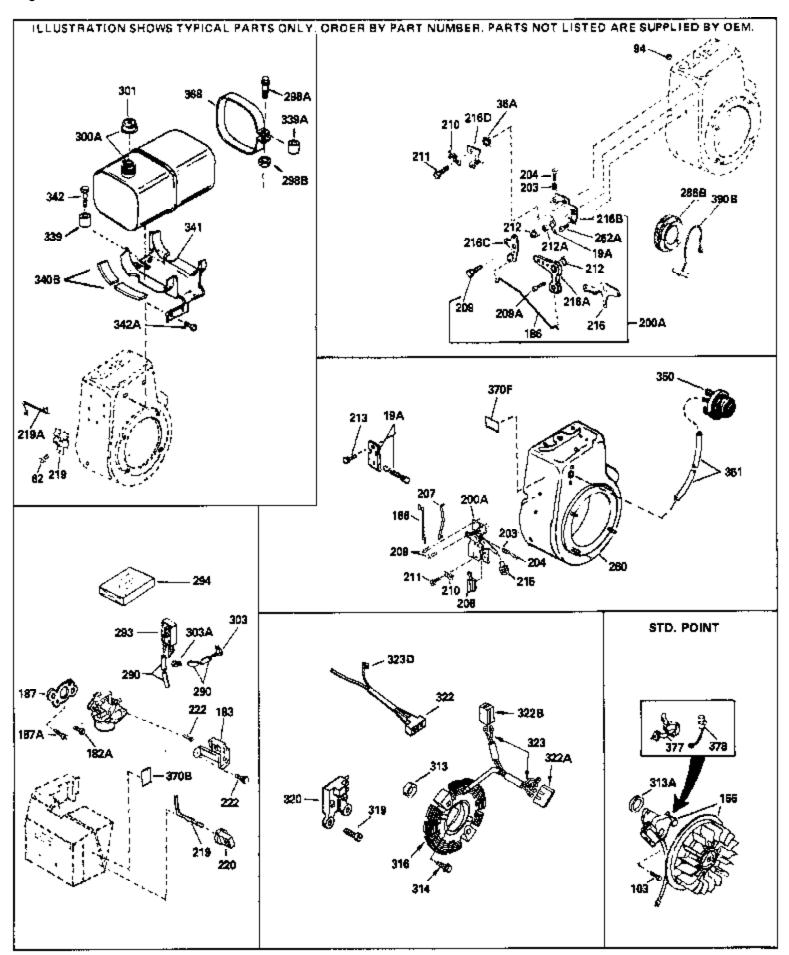

Ref #	Part Number G	ty Description
	650760	Screw, 8-32 x 3/8"
	650489	Screw, 1/4-20 x 5/8"
	610848	Magneto (w/ring gear for 110 volt sta rter) NOTE: The
		complete magneto is not available as an assembly. The
		magneto number is shown for reference purposes only. Order
		component parts individually, as shown in parts list. (Refer to
		Division 5, Section B, page 28 for breakdown or Fiche 18A-1,
		Grid G
		Glid G
	34587	Bracket, Choke
200A	34664	Control Bracket (Incl.19,203,204,206, 209)
203	31342	Spring, Compression
204	650549	Screw, 5-40 x 7/16"
206	610973	Terminal Assy. (Use as required)
207	33878	Link, Governor-to-throttle
209	650821	Screw, 10-32 x 1/2"
	27793	Clip, Conduit
	28942	Screw, 10-32 x 3/8"
	34586	Rod, Choke
	35438	Knob, Control
	28820	Screw, 10-32 x 1/2"
	34145	Blower Housing (For electric starter)
	35824	Muffler (Optional quiet muffler)
	650696	Screw, 5/16-18x2-3/4" (Used with 276A)
	33662	Hub & Screen Assy., Starter
	29774	Fuel Line (Braided 8-1/4")(21 cm)(As req.)
	30705	Fuel Line (Braided 16")(41 cm)(Use as req.)
	30962	Fuel Line (Braided 32")(81 cm)(Use as req.)
	410144B	Fuel Cap (White Plastic)(Std)(1-1/2" I.D.)
	33032	Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16"
001	00002	I.D.)
301	34210	Fuel Cap (Red Plastic) (Spurt Resistant, High Profile)
		(1-3/16" I.D)
301	35355	Fuel Cap (Red plastic) (1-1/2" I.D.)
	33876	Gasket, Stator
	35038	Spacer, Tank
	34155	Bracket, Fuel tank mounting
	650561	Screw, 1/4-20 x 5/8"
	570629A	Primer Assy.
	32180C	Primer Line
	34870	Decal, Instruction Can be used on HM80 with diecast starter.
	34387	Decal, Instruction Can be used on HM80 with stamped steel
3700	3-301	recoil starter.
	30547A	Contact Assy., Breaker
	30548B	Condenser
408	35570	Screen Seal (Can be used on HM80 with stamped steel
		recoil starter)
∆ ∩Q	35569	Spacer (Can be used on HM80 with stamped steel recoil
400	0000	starter)
		,
410	730573	Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be
		used on HM80 with stamped steel recoil starter)
411	35568	Debris Screen (Can be used on HM80 with stamped steel
		recoil starter)

Dof #	Part Number	Oh,	Description
	650907	<u> </u>	Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter)
425	730572		Starter Muff Kit (Incl. 370J, 426 & 4 27) (Can be used on HM80 with die cast starter)
429	650868		Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions).
430	611077		Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions).
431	590609		Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions)
431	590610		Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611078		A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
432	611079		D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590611		Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).
433	590636		Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).