


		/ Description
2 2 2 2 2 2 4	33823A 31927 28483 9556 28534 27652 34045A	Cylinder (Incl. 2, 4 & 33) (3-5/16" B ore) Pipe Plug, 3/8-18 sq. head (Use as re quired) Pipe Plug (3/8-18 hex countersunk) (A s req.) Pipe Plug (3/4-14 sq.hd.)(As req.)(Bu y local) Pipe Plug (1/8-27 sq. hd.) (Use as re quired) Pipe Plug(1/8-27 hex c/sunk headless) (As req) Pin, Dowel Crankshaft (Incl. 6 thru 9) NOTE: When using this crankshaft to repair older units equippedwith straight cut cam and governor gears,it will be necessary to order 34751 helical governor gear assembly and 34752 helical camshaft in order to the complete the repair.
$\begin{array}{c} 7\\ 8\\ 9\\ 10\\ 10A\\ 11\\ 11\\ 11\\ 11\\ 11A\\ 11A\\ 11A$	29783 34692 31932 34928 34222 34223 34508 34509 34510 32001C 32002B 32003B 31919 32004 32005 32006 33093A 34383 34384 32077 26073 28264 34752 33472 33471 33505 33645 33506 33645 33506 33646 33507 33508 34410 33509 33510 34751 650745 35479 30590A 31948 31956B 34095	Pin, Crankshaft gear Gear Crankshaft (Helical) Bearing, Tapered roller Cup, Bearing Bearing, Needle Bearing & Seal Assy., Needle Piston, Pin & Ring Set (Std.) (3-5/16 " Bore) Piston, Pin & Ring Set (.020" OS) Piston, Pin & Ring Set (.020" OS) Piston & Pin Ass'y. (Std.)(3-5/16")(I ncl.12) Piston & Pin Ass'y. (.020" OS) (Incl. 12) Piston & Pin Ass'y. (.020" OS) (Incl. 12) Ring, Piston pin retaining Ring Set (Std.) (3-5/16" Bore) Ring Set (.020" OS) Connecting Rod Assy. (Std.) (Incl.15, 1 6 & 17) Connecting Rod Assy. (.020" US) (Incl. 1 5, 16, 17) Connecting Rod Assy. (.020" US) (Incl. 1 5, 16, 17) Bolt, Connecting rod Nut Assy. Camshaft (MCR) (Helical) Lifter, Valve Rod, Push Intake Valve (Std.) Intake Valve (Std.) Exhaust Valve (Std.) Exhaust Valve (Std.) Exhaust Valve (1/32" OS) Spring, Valve Retainer & Cap Set, Keeper valve * "O" Ring (Exhaust only) (Also Incl. in 251) * "O" Ring (Intake only) (Also Incl. in 251) * "O" Ring (Intake only) (Also Incl. in 251) Cap, Valve Governor Gear Ass'. (Helical) Washer, Flat Washer, Flat Washer, Flat (Use with 35322 spool) Washer, Flat Spool, Governor * Gasket, Cylinder cover Cylinder Cover Ass'. (Incl. 2, 10, 10A, 33, 36, 37, 38, 93,
34	31950 650451 650588	194 & 195) * Seal, Oil Screw, 1/4-20 x 1" Screw, 1/4-20 x 2"

	Part Number Qty	
36	32425	Rod Assy., Governor
37	32426	Spacer, Governor rod
38	29193	Ring, Retaining
39	650736	Screw, 10-16 x 3/8"
40	33495	Cover, Cylinder head
41	34225A	* Gasket, Cylinder head
	34775	Head, Cylinder
	31980	Pulley, Starter
	33657	Spark Plug (L-82C)
	650691	Washer, Flat
	650690	Washer, Belleville
	650692	Screw, 5/16-18 x 1-3/4"
	650746	Screw, 5/16-18 x 1-3/8"
	730218	Valve Guide Kit (Incl. 49)
	792035	Ring, Retaining
	33515A	* Gasket, Intake pipe
	33475	Pipe, Intake
	650378	Screw, Torx T-30, 5/16-18 x 1-1/8"
	792028	Screw, 5/16-18 x 7/8"
	33476A	* Gasket, Carburetor
	33477A	Baffle, Air cleaner
56	792075	Nut, Lock 5/16-24 (Used in early prod uction)
57	33478	Link, Governor lever-to-throttle leve r
58	31963	Lever, Governor
59	31964	Clamp, Governor lever
60	650518	Lockwasher, No. 10 E.T.
	30312	Screw, 10-32 x 1/2"
	650544	Screw, Torx T-25, 10-24 x 7/8"
	7975	Nut, 10-24
	31965	Plate, Governor spring
	31984A	Lever Assy., Control
	28558	Washer, Wave
	31966	Bushing, Governor lever
	650597	Screw, 10-24 x 5/8"
	31967	
		Spring, Governor Screw, 10-24 x 2"
	650591	•
	33099	Spring
	32599	"O" Ring (Incl. in 251)
	650666	Washer, Lock
	32579	Baffle, Blower housing
	650561	Screw, 1/4-20 x 5/8"
	650592	Key, Flywheel
77A	730201	Trigger Pin Kit (Use as required)
77	610967	Flywheel (w/ring gear)
78	650594	Nut, Flywheel
79	610906	Solid State Magneto (Incl. 158 thru 1 61)
80	650661	Screw, 1/4-20 x 3/4"
	33479	Extension, Blower housing
	30063	Screw, 1/4-20 x 1/2"
	650751	Screw, 1/4-20 x 7/16"
	33775A	Blower Hsg.(Incl.218A,219)(For elec.s tarter)
	8274	Washer, Lock
85A		
		Washer, Lock
	650595	Screw, 5/16-24 x 3/8"
	650595	Screw, 5/16-24 x 3/8"
87	650752	Screw, 1/4-20 x 7/16"
87 88	650752 35475 33481	Screw, 1/4-20 x 7/16" Tube, Push rod * "O" Ring (Also Incl. in 251)

		Qty	Description
	34754		Housing, Rocker arm
	33013		Cover, Starter bubble
92	650701		Screw, 8-18 x 7/16"
93	8345		Washer, Flat
94	33484		* "O" Ring (Also Incl. in 251)
	650168		Washer, Flat
	32610A		Screw, 1/4-20 x 29/32"
	33485		
			Arm, Rocker
	33486		Ring, Retaining
	650755		Screw, 1/4-20 x 3/4"
	650864		Nut, Hex, 1/4-20
101	650756		Stud, Rocker arm
102	33487		* "O" Ring (Also Incl. in 251)
	33488		Cover, Rocker arm
	31958A		* Gasket, Breather (Also Incl. in 251)
	33489		
			Body Assy., Breather
	33490		Tube, Breather
	30102		* Screw, 10-32 x 5/8" (Also Incl. in 25 1)
108	650738		Screw, 1/4-20 x 5/8"
111	35471		* Gasket, Air cleaner
112	35472		Bracket, Air cleaner
	650399		Screw, 10-32 x 5/8"
	32008		Element, Air cleaner
			•
	32810		Cover, Air cleaner
	650513		Nut, Wing
	31992		Spacer, Screen
120	33776		Screen, Pulley
122	650680		Screw, 1/4-20 x 1-1/2"
123	27070		Washer, Lock
	32043B		Muffler
	32577		Cover, Cylinder NOTE: Determine the gap between the cover
1-10	32311		and the machined surface on the cylinder, which can be
			from .001" up to .007", in which case no shim gaskets will be
			required. Use of gaskets must be limited to a combined total
			of .010" thick. Steel spacersmust be used as required to eli
1/7	700000		Screw, 5/16-18 x 7/8"
	792028		•
	650399		Screw, 10-32 x 5/8"
	610965		Stator Plate Assy.
155	31971		* Gasket, Shim (.004/.005 thick) NOTE: Determine the gap
			between the cover and the machined surface on the
			cylinder, which can be from .001" up to .007", in which case
			no shim gaskets will be required. Use of gaskets must be
			limited to a combined total of .010" thick. Steel
			spacersmust be used a
156	31972		* Gasket, Shim (.005/.007 thick) NOTE: Determine the gap
190	61672		between the cover and the machined surface on the
			cylinder, which can be from .001" up to .007", in which case
			no shim gaskets will be required. Use of gaskets must be
			limited to a combined total of .010" thick. Steel
			spacersmust be used a
·	22224		·
157	32031		* Spacer, Steel (.010 thick) NOTE: Determine the gap
			between the cover and the machined surface on the
			cylinder, which can be from .001" up to .007", in which case
			no shim gaskets will be required. Use of gaskets must be
			limited to a combined total of .010" thick. Steel
			spacersmust be used as re
			שמטבושוווששו שב עשבע מש וב

Ref #	Part Number Qty	Description
158	610118	Cover, Spark plug
159	610750	Grommet, Lead wire
160	610408	Nut, 8-32
161	610908	Terminal, Female
164	33356	Terminal
165	650760	Screw, 8-32 x 3/8"
166	28545	Grommet, Plastic
189	33068	Dipstick (Incl. 190)
190	29985	"O" Ring
191	32352	Tube, Oil filler
192	29673	* Gasket, Oil filler tube
193	29443	Clip, Wire
244B	31752	Decal, Air cleaner
244A	34768	Decal, Name
244	34346	Decal, Instruction
247		Carburetor NOTE: This model was built and shipped without a carburetor. (Refer to Division 5, Section D for breakdown)
250	33516G	* Gasket Set (Incl. items marked *)
251	35075	"O" Ring Kit (Incl. Nos. items marked +)

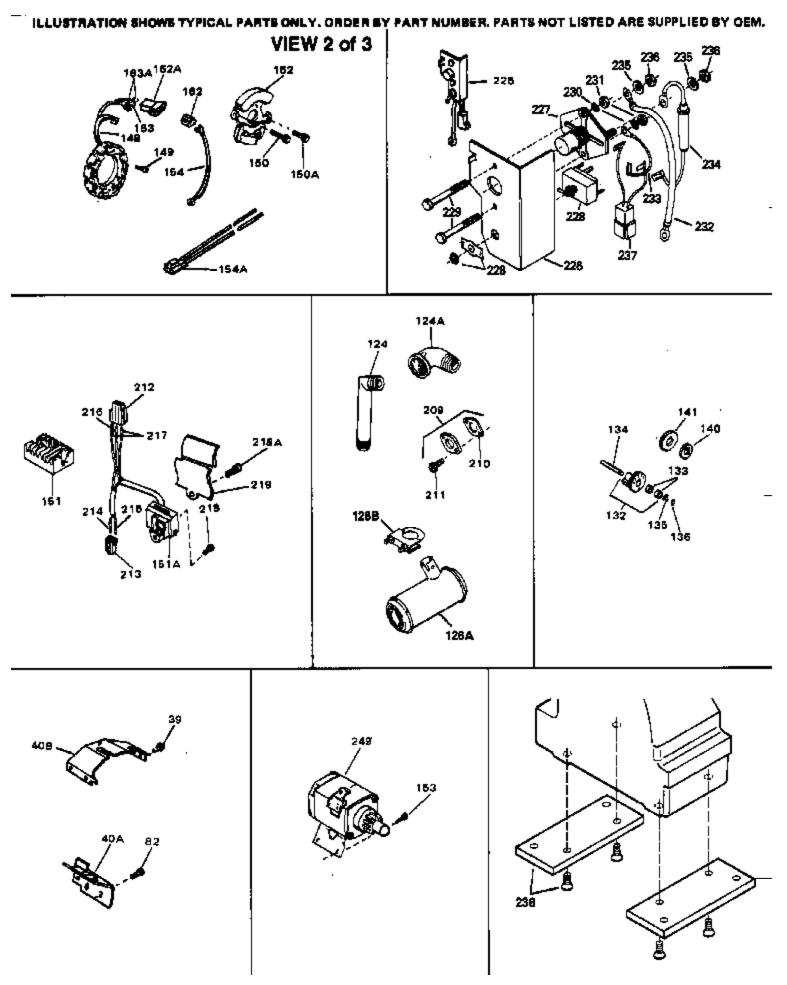

Ref #	Part Number	Qty Description
39	650736	Screw, 10-16 x 3/8"
82	30063	Screw, 1/4-20 x 1/2"
126A	35731	Muffler (Incl. 126B)
141		Gear, Counterbalance weight (Straight teeth) (For replacement see Ref. 132. Order correct kit for your enginemodel number.)
153	792028	Screw, 5/16-18 x 7/8"(Use w/32817 str .motor)
153	650781	Screw,5/16-18 x 11/16"(Use w/33835 st r.motor)
209	730178	Ech.Adapter Kit (Incl.210 & 211)(As r equired)
210	34102B	Gasket, Exhaust (Use as required)
211	30196	Screw, 5/16-18 x 3/4" (Use as require d)
238	730212	Adapter Plate Kit (Optional) NOTE: If you are having mounting problems in using a HH100 thru0H180 inplace of a large frame competitivebrand, we would like to call your attention to 730212 adapter plate kit. The kit converts the bottom mounting system found on HH100 thru 0H180 to a top mounting sys


1714

145

143

1710 196

ILLUSTRATION SHOWS TYPICAL PARTS ONLY. ORDER BY PART NUMBER. PARTS NOT LISTED ARE SUPPLIED BY DEM.

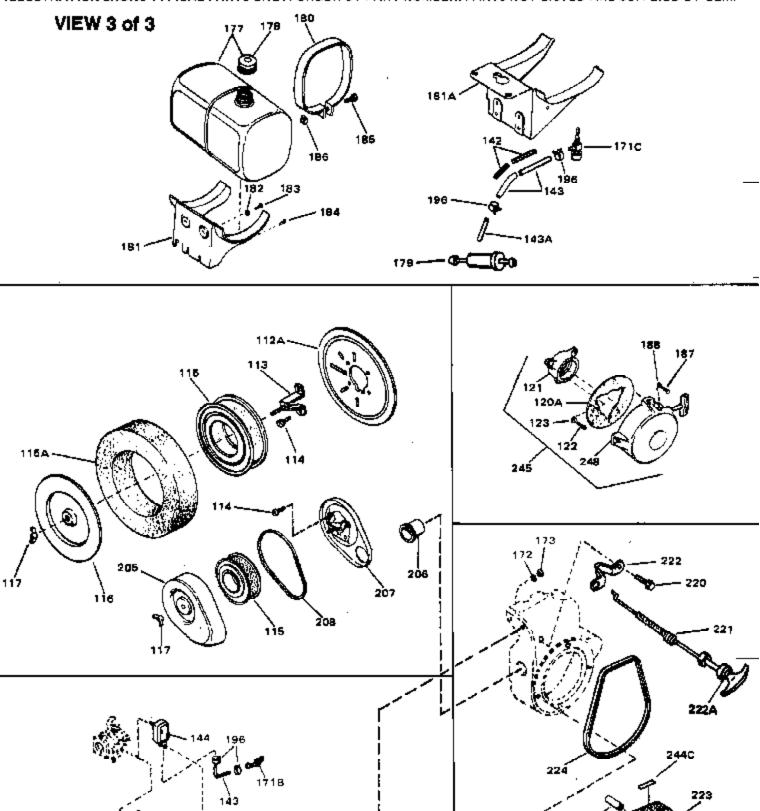

119Á

122

122A

Ref #	Part Number Qty	Description
114	650399	Screw, 10-32 x 5/8"
115	32008	Element, Air cleaner
117	650513	Nut, Wing
119	31992	Spacer, Screen
122	650680	Screw, 1/4-20 x 1-1/2"
123	27070	Washer, Lock
143	29774	Fuel Line (Braided 8.25")(21 cm)(As r equired)
143	30705	Fuel Line (Braided 16")(41 cm)(As req uired)
143	30962	Fuel Line (Braided 32")(81 cm)(As req uired)
178	410144B	Fuel Cap (White Plastic)(Std)(As required)
178	34210	Fuel Cap (Red Plastic) (Spurt resistant, High profile) (Use as required)
196	26460	Clamp, Fuel line (Use as required)
245	730134	Rewind Starter Kit (Incl.120A, 121, 122, 187, 188 & 248) (Use as required)